

# TYRE CATALOGUE

Passenger Car, SUV and Light Truck



**WEST LAKE**

General Version







**TOP 9**

No. 9 of Top 75 Global Tyre Manufacturers



**SINCE 1958**

Established in Year 1958



**30,000 EMPLOYEES**

Support from Over 30,000 Employees



**200 MARKETS**

Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.



Most Advanced  
Equipment



Best  
Raw Material



Leanest  
Management



Latest  
Technology



Least  
Energy Consumption



Most Suitable  
Products

COMPANY MISSION

**WE ARE COMMITTED TO  
ADVANCING TOWARDS  
FUTURE MOBILITY**

COMPANY VISION

**TO BE A GLOBAL LEADING  
TYRE MANUFACTURER**



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil







## STRATEGIC COOPERATION



**WEST LAKE**



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB

# ALWAYS MOVING FORWARD

Passenger Car, SUV and Light Truck Tyres

**WEST LAKE**

## OE CUSTOMERS



## KEY ACCOUNTS



## KEY SUPPLIERS







# **WEST LAKE** CONTENTS

Passenger Car, SUV and Light Truck Tyres

## **ULTRA HIGH PERFORMANCE (UHP)**

RS/RSII DSII Z-007(ZRT) Z-007 SA-37 SA-57

09-20

## **PASSENGER**

Z-117 Z-108 RP36

21-26

## **SUV / LTR**

Z-007 Z-203 SU320 SU318 SL369 SL399 SL339 SL366 SL376 SL378 SL386 SL315 SL309

27-52

## **COMMERCIAL LTR**

SC328 SC326 H188 ST313

53-60

## **WINTER**

Z-507 SW608 SW628 SW618 SW612 Z-506 SW606

61-74

## **TYRE KNOWLEDGE**

75-81



SPORT RS



Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Asymmetric tread design with big pattern blocks and special compound provides superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability



Sport



Braking



Silica



Asymmetric

|              |         |
|--------------|---------|
| Rim Size     | 15 - 20 |
| Series       | 30 - 50 |
| Speed Rating | V - W   |

SPORT RS

| Rim (inch) | Size                   | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kPa) | UTQG    | TT/TL   |
|------------|------------------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|---------|
| 15"        | 195/50R15 RS           | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 240     | AA A TL |
|            | 205/50R15 XL RS        | 89V           | 6.5J         | 214                | 587                   | 580            | 350                     | 240     | AA A TL |
| 16"        | 205/45ZR16 XL RS       | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 240     | AA A TL |
|            | 225/50R16 XL RS        | 96W           | 7.0J         | 233                | 632                   | 710            | 350                     | 240     | AA A TL |
| 17"        | 235/40ZR17 RS          | 90W           | 8.5J         | 241                | 620                   | 600            | 300                     | 240     | AA A TL |
|            | 245/40ZR17 XL RS       | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 240     | AA A TL |
|            | 215/45ZR17 RS          | 87W           | 7.0J         | 213                | 626                   | 545            | 300                     | 240     | AA A TL |
|            | 225/45ZR17 XL RS       | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 240     | AA A TL |
| 18"        | 235/45ZR17 RS          | 94W           | 8.0J         | 236                | 644                   | 670            | 300                     | 240     | AA A TL |
|            | 265/35ZR18 XL RS II RS | 97W           | 9.5J         | 271                | 643                   | 730            | 350                     | 180/240 | AA A TL |
| 18"        | 285/35ZR18 XL RS II RS | 101W          | 10.0J        | 290                | 657                   | 825            | 350                     | 180/240 | AA A TL |
|            | 225/40ZR18 XL RS       | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 240     | AA A TL |
| 19"        | 235/40ZR18 XL RS II RS | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 180/240 | AA A TL |
|            | 275/30ZR19 XL RS       | 96W           | 9.5J         | 278                | 649                   | 710            | 350                     | 240     | AA A TL |
| 20"        | 235/35ZR19 XL RS       | 91W           | 8.5J         | 241                | 647                   | 615            | 350                     | 240     | AA A TL |
|            | 285/35ZR19 XL RS       | 103W          | 10.0J        | 290                | 683                   | 875            | 350                     | 240     | AA A TL |
|            | 275/35ZR20 XL RS II    | 102W          | 9.5J         | 278                | 700                   | 850            | 350                     | 180     | AA A TL |
|            | 285/35ZR20 XL RS II RS | 104W          | 10.0J        | 290                | 708                   | 900            | 350                     | 180/240 | AA A TL |
| 18"        | 255/40ZR20 XL RS II RS | 101W          | 9.0J         | 260                | 712                   | 825            | 350                     | 180/240 | AA A TL |

Made in China





SPORT DS II



Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Directional pattern design provides outstanding handling and superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability



|              |         |
|--------------|---------|
| Rim Size     | 17 - 18 |
| Series       | 35 - 45 |
| Speed Rating | W       |

SPORT DS II

| Rim (inch) | Size          | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG     | TT/TL |
|------------|---------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|-------|
| 17"        | 245/40ZR17 XL | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 180 AA A | TL    |
|            | 255/40ZR17 XL | 98W           | 9.0J         | 260                | 636                   | 750            | 350                     | 180 AA A | TL    |
|            | 225/45ZR17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 180 AA A | TL    |
| 18"        | 255/35ZR18 XL | 94W           | 9.0J         | 260                | 635                   | 670            | 350                     | 180 AA A | TL    |
|            | 265/35ZR18 XL | 97W           | 9.5J         | 271                | 643                   | 730            | 350                     | 180 AA A | TL    |
|            | 235/40ZR18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 180 AA A | TL    |

● Made in China






ZUPERACE<sup>Z-007</sup> = ZRT



Benefits and Features

ZC Rubber RunFlat Tyres ( ZRT )

- ADVANCED CARCASS STRUCTURE**  
Enhance the tyre body and avoid possible tyre failure during low pressure driving
- SPECIAL REINFORCED SIDEWALL CONSTRUCTION**  
Supporting the tyres even if the air pressure dropped to zero
- ZC Rubber first generation RunFlat tyres with extraordinary performance in low air pressure situation

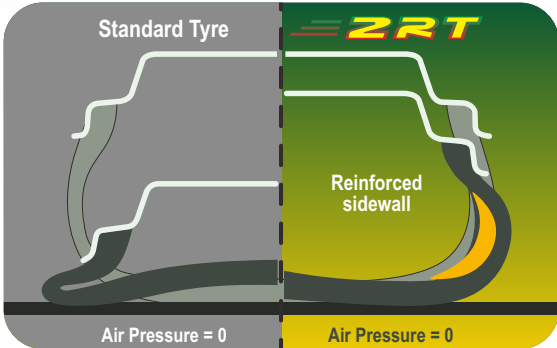

Soundbolt Array  
( Minimized Noise )



Hybrid Formula  
( Enhanced Grip )



BPOT Technology  
( Improved Durability )

|              |         |
|--------------|---------|
| Rim Size     | 17 - 22 |
| Series       | 30 - 55 |
| Speed Rating | V - W   |

ZUPERACE<sup>Z-007</sup> = ZRT

| Rim (inch) |              | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG     | TT/TL    | Rim (inch) |              | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG     | TT/TL    |    |
|------------|--------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|----------|------------|--------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|----------|----|
| 17"        | 🔥            | 205/45R17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 320 AA A | TL       | 19"        | 🔥            | 235/45R19 XL | 99W           | 8.0J         | 236                | 695                   | 775            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 225/45R17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 320 AA A | TL       |            | 🔥            | 245/45R19    | 98W           | 8.0J         | 243                | 703                   | 750            | 300                     | 320 AA A | TL       |    |
|            | 🔥            | 255/45R17 XL | 102W          | 8.5J         | 255                | 662                   | 850            | 350                     | 320 AA A | TL       |            | 🔥            | 245/50R19 XL | 105W          | 7.5J         | 253                | 729                   | 925            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 205/50R17 XL | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 320 AA A | TL       |            | 🔥            | 255/50R19 XL | 107W          | 8.0J         | 265                | 739                   | 975            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 320 AA A | TL       |            | 🔥            | 235/55R19 XL | 105V          | 7.5J         | 245                | 741                   | 925            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 205/55R17 XL | 95W           | 6.5J         | 214                | 658                   | 690            | 350                     | 320 AA A | TL       |            | 20"          | 🔥            | 275/30R20     | 97W          | 9.5J               | 278                   | 674            | 730                     | 350      | 320 AA A | TL |
|            | 🔥            | 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 320 AA A | TL       | 🔥          |              | 245/35R20    | 95W           | 8.5J         | 248                | 680                   | 690            | 350                     | 320 AA A | TL       |    |
|            | 18"          | 🔥            | 255/35R18 XL  | 94W          | 9.0J               | 260                   | 635            | 670                     | 350      | 320 AA A | TL         |              | 🔥            | 275/35R20 XL  | 102W         | 9.5J               | 278                   | 700            | 850                     | 350      | 320 AA A | TL |
| 🔥          |              | 225/40R18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 320 AA A | TL       | 🔥          |              | 315/35R20 XL | 110W          | 11.0J        | 320                | 728                   | 1060           | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 235/40R18    | 91W           | 8.5J         | 241                | 645                   | 615            | 300                     | 320 AA A | TL       | 🔥          |              | 325/35R20    | 108W          | 11.5J        | 331                | 736                   | 1000           | 300                     | 320 AA A | TL       |    |
| 🔥          |              | 245/40R18 XL | 97W           | 8.5J         | 248                | 653                   | 730            | 350                     | 320 AA A | TL       | 🔥          |              | 245/40R20 XL | 99W           | 8.5J         | 248                | 704                   | 775            | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 255/40R18 XL | 99W           | 9.0J         | 260                | 661                   | 775            | 350                     | 320 AA A | TL       | 🔥          |              | 275/40R20 XL | 106W          | 9.5J         | 278                | 728                   | 950            | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 275/40R18 XL | 103W          | 9.5J         | 278                | 677                   | 875            | 350                     | 320 AA A | TL       | 🔥          |              | 285/40R20    | 104W          | 10.0J        | 290                | 736                   | 900            | 300                     | 320 AA A | TL       |    |
| 🔥          |              | 225/45R18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 320 AA A | TL       | 🔥          | 305/40R20 XL | 112W         | 11.0J         | 313          | 752                | 1120                  | 350            | 320 AA A                | TL       |          |    |
| 🔥          |              | 245/45R18 XL | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 320 AA A | TL       | 🔥          | 245/45R20 XL | 103W         | 8.0J          | 243          | 728                | 875                   | 350            | 320 AA A                | TL       |          |    |
| 🔥          |              | 255/45R18 XL | 103W          | 8.5J         | 255                | 687                   | 875            | 350                     | 320 AA A | TL       | 🔥          | 255/45R20 XL | 105W         | 8.5J          | 255          | 738                | 925                   | 350            | 320 AA A                | TL       |          |    |
| 🔥          |              | 225/50R18 XL | 99W           | 7.0J         | 233                | 683                   | 775            | 350                     | 320 AA A | TL       | 🔥          | 275/45R20 XL | 110W         | 9.0J          | 273          | 756                | 1060                  | 350            | 320 AA A                | TL       |          |    |
| 🔥          |              | 235/50R18 XL | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | 320 AA A | TL       | 21"        | 🔥            | 275/30R21 XL | 98W           | 9.5J         | 278                | 699                   | 750            | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 245/50R18 XL | 104W          | 7.5J         | 253                | 703                   | 900            | 350                     | 320 AA A | TL       |            | 🔥            | 325/30R21 XL | 108W          | 11.5J        | 331                | 729                   | 1000           | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 235/55R18 XL | 104V          | 7.5J         | 245                | 715                   | 900            | 350                     | 320 AA A | TL       |            | 🔥            | 245/35R21 XL | 96W           | 8.5J         | 248                | 705                   | 710            | 350                     | 320 AA A | TL       |    |
| 🔥          |              | 255/55R18 XL | 109W          | 8.0J         | 265                | 737                   | 1030           | 350                     | 320 AA A | TL       |            | 🔥            | 275/35R21 XL | 103W          | 9.5J         | 278                | 725                   | 875            | 350                     | 320 AA A | TL       |    |
| 19"        | 🔥            | 285/30R19 XL | 98W           | 10.0J        | 290                | 655                   | 750            | 350                     | 320 AA A | TL       |            | 🔥            | 285/35R21 XL | 105W          | 10.0J        | 290                | 733                   | 925            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 245/35R19 XL | 93W           | 8.5J         | 248                | 655                   | 650            | 350                     | 320 AA A | TL       |            | 🔥            | 315/35R21 XL | 111W          | 11.0J        | 320                | 753                   | 1090           | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 255/35R19 XL | 96W           | 9.0J         | 260                | 661                   | 710            | 350                     | 320 AA A | TL       |            | 🔥            | 245/40R21 XL | 100W          | 8.5J         | 248                | 729                   | 800            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 275/35R19 XL | 100W          | 9.5J         | 278                | 675                   | 800            | 350                     | 320 AA A | TL       |            | 🔥            | 275/40R21 XL | 107W          | 9.5J         | 278                | 753                   | 975            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 225/40R19 XL | 93W           | 8.0J         | 230                | 663                   | 650            | 350                     | 320 AA A | TL       | 🔥          | 285/45R21 XL | 113W         | 9.5J          | 285          | 789                | 1150                  | 350            | 320 AA A                | TL       |          |    |
|            | 🔥            | 245/40R19 XL | 98W           | 8.5J         | 248                | 679                   | 750            | 350                     | 320 AA A | TL       | 22"        | 🔥            | 315/30R22 XL | 107W          | 11.0J        | 320                | 749                   | 975            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 255/40R19 XL | 100W          | 9.0J         | 260                | 687                   | 800            | 350                     | 320 AA A | TL       |            | 🔥            | 275/35R22 XL | 104W          | 9.5J         | 278                | 751                   | 900            | 350                     | 320 AA A | TL       |    |
|            | 🔥            | 275/40R19    | 101W          | 9.5J         | 278                | 703                   | 825            | 300                     | 320 AA A | TL       |            | 🔥            | 315/35R22 XL | 111W          | 11.0J        | 320                | 779                   | 1090           | 350                     | 320 AA A | TL       |    |
| 🔥          | 225/45R19 XL | 96W          | 7.5J          | 225          | 685                | 710                   | 350            | 320 AA A                | TL       | 🔥        |            | 275/40R22 XL | 107W         | 9.5J          | 278          | 779                | 975                   | 350            | 320 AA A                | TL       |          |    |

Made in China





ZUPERACE<sup>Z-007</sup>



Benefits and Features

- 24 Soundbolt Arrays, and NVH simulation optimized pitch pattern make the silence performance toward the extreme
- Scaled grooves with beveled edges, the large continuous pattern block on tyre shoulder, the central continuous pattern rib with shallow groove, and together with the Non Petrochemical renewable green compound rubber, greatly improve the handling and grip performance
- BPOT Technology, Hybrid Silane and Mixing-Technology, together with ultra-fine particle size Nano-Silica with high density, provide tyres with better wear resistance and increased mileage while reducing fuel consumption

**Minimized Noise**  
24 Soundbolt Arrays for minimized noise

**Enhanced Grip**  
Hybrid Formula™ - Super hybrid rubber compound Fast water drainage and strong grip

**Improved Durability**  
BPOT Technology optimize the footprint and improve durability

Soundbolt Array  
(Minimized Noise)

Hybrid Formula  
(Enhanced Grip)

BPOT Technology  
(Improved Durability)

|              |         |
|--------------|---------|
| Rim Size     | 17 - 23 |
| Series       | 30 - 55 |
| Speed Rating | V - Y   |

ZUPERACE<sup>Z-007</sup>

| Rim (inch) | Size             | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|------------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 17"        | 215/45ZR17 XL    | 91Y           | 7.0J         | 213                | 626                   | 615            | 350                     | 360 A A | TL    |
|            | 225/45ZR17 XL    | 94Y           | 7.5J         | 225                | 634                   | 670            | 350                     | 360 A A | TL    |
|            | 235/45ZR17 XL    | 97Y           | 8.0J         | 236                | 644                   | 730            | 350                     | 360 A A | TL    |
|            | 245/45ZR17 XL    | 99Y           | 8.0J         | 243                | 652                   | 775            | 350                     | 360 A A | TL    |
|            | 255/45ZR17       | 98Y           | 8.5J         | 255                | 662                   | 750            | 300                     | 360 A A | TL    |
|            | 205/50R17 XL     | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 360 A A | TL    |
|            | 215/50R17        | 91W           | 7.0J         | 226                | 648                   | 615            | 300                     | 360 A A | TL    |
|            | 225/50R17 XL     | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 360 A A | TL    |
|            | 235/50R17        | 96W           | 7.5J         | 245                | 668                   | 710            | 300                     | 360 A A | TL    |
|            | 215/55R17 XL     | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 360 A A | TL    |
|            | 225/55R17 XL     | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 360 A A | TL    |
|            | 235/55R17 XL     | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 360 A A | TL    |
| 18"        | 255/35ZR18 XL    | 94Y           | 9.0J         | 260                | 635                   | 670            | 350                     | 360 A A | TL    |
|            | 225/40ZR18 XL    | 92Y           | 8.0J         | 230                | 637                   | 630            | 350                     | 360 A A | TL    |
|            | 235/40ZR18 XL    | 95Y           | 8.5J         | 241                | 645                   | 690            | 350                     | 360 A A | TL    |
|            | 245/40ZR18 XL    | 97Y           | 8.5J         | 248                | 653                   | 730            | 350                     | 360 A A | TL    |
|            | 255/40ZR18 XL    | 99Y           | 9.0J         | 260                | 661                   | 775            | 350                     | 360 A A | TL    |
|            | 265/40ZR18 XL    | 101Y          | 9.5J         | 271                | 669                   | 825            | 350                     | 360 A A | TL    |
|            | 225/45ZR18 XL    | 95Y           | 7.5J         | 225                | 659                   | 690            | 350                     | 360 A A | TL    |
|            | 235/45ZR18 XL EV | 98Y           | 8.0J         | 236                | 669                   | 750            | 350                     | 360 A A | TL    |
|            | 245/45ZR18 XL    | 100Y          | 8.0J         | 243                | 677                   | 800            | 350                     | 360 A A | TL    |
|            | 255/45ZR18       | 99Y           | 8.5J         | 255                | 687                   | 775            | 300                     | 360 A A | TL    |
|            | 265/45ZR18       | 101Y          | 9.0J         | 266                | 695                   | 825            | 300                     | 360 A A | TL    |
|            | 275/45ZR18 XL    | 107Y          | 9.0J         | 273                | 705                   | 975            | 350                     | 360 A A | TL    |
|            | 215/50R18        | 92W           | 7.0J         | 226                | 673                   | 630            | 300                     | 360 A A | TL    |
|            | 225/50R18        | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 360 A A | TL    |
|            | 235/50R18 XL     | 101W          | 7.5J         | 245                | 693                   | 825            | 350                     | 360 A A | TL    |
| 19"        | 245/50R18        | 100W          | 7.5J         | 253                | 703                   | 800            | 300                     | 360 A A | TL    |
|            | 215/55R18 XL EV  | 99V           | 7.0J         | 226                | 693                   | 775            | 350                     | 360 A A | TL    |
|            | 225/55R18 XL EV  | 102W          | 7.0J         | 233                | 705                   | 850            | 350                     | 360 A A | TL    |
|            | 235/55R18 EV     | 100W          | 7.5J         | 245                | 715                   | 800            | 300                     | 360 A A | TL    |
|            | 255/55R18 XL     | 109W          | 8.0J         | 265                | 737                   | 1030           | 350                     | 360 A A | TL    |
|            | 255/30ZR19 XL    | 91Y           | 9.0J         | 260                | 637                   | 615            | 350                     | 360 A A | TL    |
|            | 235/35ZR19 XL    | 91Y           | 8.5J         | 241                | 647                   | 615            | 350                     | 360 A A | TL    |
|            | 245/35ZR19 XL    | 93Y           | 8.5J         | 248                | 655                   | 650            | 350                     | 360 A A | TL    |
|            | 255/35ZR19 XL    | 96Y           | 9.0J         | 260                | 661                   | 710            | 350                     | 360 A A | TL    |
|            | 275/35ZR19 XL    | 100Y          | 9.5J         | 278                | 675                   | 800            | 350                     | 360 A A | TL    |
|            | 225/40ZR19 XL    | 93Y           | 8.0J         | 230                | 663                   | 650            | 350                     | 360 A A | TL    |
|            | 235/40ZR19 XL    | 96Y           | 8.5J         | 241                | 671                   | 710            | 350                     | 360 A A | TL    |
|            | 245/40ZR19 XL    | 98Y           | 8.5J         | 248                | 679                   | 750            | 350                     | 360 A A | TL    |
|            | 255/40ZR19 XL    | 100Y          | 9.0J         | 260                | 687                   | 800            | 350                     | 360 A A | TL    |
|            | 265/40ZR19       | 98Y           | 9.5J         | 271                | 695                   | 750            | 300                     | 360 A A | TL    |
| 20"        | 275/40ZR19 XL    | 105Y          | 9.5J         | 278                | 703                   | 925            | 350                     | 360 A A | TL    |
|            | 285/40ZR19 XL    | 107Y          | 10.0J        | 290                | 711                   | 975            | 350                     | 360 A A | TL    |
|            | 295/40ZR19 XL    | 108Y          | 10.5J        | 301                | 719                   | 1000           | 350                     | 360 A A | TL    |
|            | 225/45ZR19 XL    | 96Y           | 7.5J         | 225                | 685                   | 710            | 350                     | 360 A A | TL    |
|            | 235/45ZR19 XL    | 99Y           | 8.0J         | 236                | 695                   | 775            | 350                     | 360 A A | TL    |
|            | 245/45ZR19 EV    | 98Y           | 8.0J         | 243                | 703                   | 750            | 300                     | 360 A A | TL    |
|            | 255/45ZR19 XL EV | 104Y          | 8.5J         | 255                | 713                   | 900            | 350                     | 360 A A | TL    |
|            | 265/45ZR19 XL    | 105Y          | 9.0J         | 266                | 721                   | 925            | 350                     | 360 A A | TL    |
|            | 275/45ZR19 XL EV | 108Y          | 9.0J         | 273                | 731                   | 1000           | 350                     | 360 A A | TL    |
|            | 235/50R19        | 99W           | 7.5J         | 245                | 719                   | 775            | 300                     | 360 A A | TL    |
|            | 245/50R19 XL     | 105W          | 7.5J         | 253                | 729                   | 925            | 350                     | 360 A A | TL    |
|            | 255/50R19 XL EV  | 107W          | 8.0J         | 265                | 739                   | 975            | 350                     | 360 A A | TL    |
|            | 225/55R19 EV     | 99W           | 7.0J         | 233                | 731                   | 775            | 300                     | 360 A A | TL    |
|            | 235/55R19 XL EV  | 105W          | 7.5J         | 245                | 741                   | 925            | 350                     | 360 A A | TL    |
|            | 245/55R19        | 103V          | 7.5J         | 253                | 753                   | 875            | 300                     | 360 A A | TL    |
| 21"        | 255/55R19 XL     | 111W          | 8.0J         | 265                | 763                   | 1090           | 350                     | 360 A A | TL    |
|            | 295/35ZR20 XL    | 105Y          | 10.5J        | 301                | 714                   | 925            | 350                     | 360 A A | TL    |
|            | 255/30ZR20 XL    | 92Y           | 9.0J         | 260                | 662                   | 630            | 350                     | 360 A A | TL    |
|            | 265/30ZR20 XL    | 94Y           | 9.5J         | 271                | 668                   | 670            | 350                     | 360 A A | TL    |
|            | 275/30ZR20 XL    | 97Y           | 9.5J         | 278                | 674                   | 730            | 350                     | 360 A A | TL    |
|            | 235/35ZR20 XL EV | 92Y           | 8.5J         | 241                | 672                   | 630            | 350                     | 360 A A | TL    |
|            | 255/35ZR20 XL    | 97Y           | 9.0J         | 260                | 686                   | 730            | 350                     | 360 A A | TL    |
|            | 265/35ZR20 XL    | 99Y           | 9.5J         | 271                | 694                   | 775            | 350                     | 360 A A | TL    |
|            | 275/35ZR20 XL    | 102Y          | 9.5J         | 278                | 700                   | 850            | 350                     | 360 A A | TL    |
|            | 285/35ZR20 XL    | 104Y          | 10.0J        | 290                | 708                   | 900            | 350                     | 360 A A | TL    |
|            | 315/35ZR20 XL    | 110Y          | 11.0J        | 320                | 728                   | 1060           | 350                     | 360 A A | TL    |
|            | 245/40ZR20 XL    | 99Y           | 8.5J         | 248                | 704                   | 775            | 350                     | 360 A A | TL    |
|            | 255/40ZR20 XL EV | 101Y          | 9.0J         | 260                | 712                   | 825            | 350                     | 360 A A | TL    |
|            | 265/40ZR20 XL    | 104Y          | 9.5J         | 271                | 720                   | 900            | 350                     | 360 A A | TL    |
|            | 275/40ZR20 XL    | 106Y          | 9.5J         | 278                | 728                   | 950            | 350                     | 360 A A | TL    |
| 22"        | 285/40ZR20 XL EV | 108Y          | 10.0J        | 290                | 736                   | 1000           | 350                     | 360 A A | TL    |
|            | 295/40ZR20 XL    | 110Y          | 10.5J        | 301                | 744                   | 1060           | 350                     | 360 A A | TL    |
|            | 305/40ZR20 XL    | 112Y          | 11.0J        | 313                | 752                   | 1120           | 350                     | 360 A A | TL    |
|            | 235/45ZR20 XL    | 100Y          | 8.0J         | 236                | 720                   | 800            | 350                     | 360 A A | TL    |
|            | 245/45ZR20 XL EV | 103W          | 8.0J         | 243                | 728                   | 875            | 350                     | 360 A A | TL    |
|            | 255/45ZR20 XL EV | 105Y          | 8.5J         | 255                | 738                   | 925            | 350                     | 360 A A | TL    |
|            | 265/45ZR20 XL    | 108Y          | 9.0J         | 266                | 746                   | 1000           | 350                     | 360 A A | TL    |
|            | 275/45ZR20 XL    | 110Y          | 9.0J         | 273                | 756                   | 1060           | 350                     | 360 A A | TL    |
|            | 285/45ZR20 EV    | 108Y          | 9.5J         | 285                | 764                   | 1000           | 300                     | 360 A A | TL    |
|            | 235/50R20 EV     | 104W          | 7.5J         | 245                | 744                   | 900            | 350                     | 360 A A | TL    |
|            | 245/50R20 EV     | 102W          | 7.5J         | 253                | 754                   | 850            | 300                     | 360 A A | TL    |
|            | 255/50R20 XL EV  | 109W          | 8.0J         | 265                | 764                   | 1030           | 350                     | 360 A A | TL    |
|            | 235/55R20 XL     | 105W          | 7.5J         | 245                | 766                   | 925            | 350                     | 360 A A | TL    |
|            | 255/55R20 XL     | 110W          | 8.0J         | 265                | 788                   | 1060           | 350                     | 360 A A | TL    |
|            | 275/30ZR21 XL    | 98Y           | 9.5J         | 278                | 699                   | 750            | 350                     | 360 A A | TL    |
| 23"        | 285/30ZR21 XL    | 100Y          | 10.0J        | 290                | 705                   | 800            | 350                     | 360 A A | TL    |
|            | 315/30ZR21 XL    | 105Y          | 11.0J        | 320                | 723                   | 925            | 350                     | 360 A A | TL    |
|            | 245/35ZR21 XL EV | 96Y           | 8.5J         | 248                | 705                   | 710            | 350                     | 360 A A | TL    |
|            | 275/35ZR21 XL EV | 103Y          | 9.5J         | 278                | 725                   | 875            | 350                     | 360 A A | TL    |
|            | 285/35ZR21 XL    | 105Y          | 10.0J        | 290                | 733                   | 925            | 350                     | 360 A A | TL    |
|            | 295/35ZR21 XL    | 107Y          | 10.5J        | 301                | 739                   | 975            | 350                     | 360 A A | TL    |
|            | 255/40ZR21 XL    | 102Y          | 9.0J         | 260                | 737                   | 850            | 350                     | 360 A A | TL    |
|            | 265/40ZR21 XL    | 105Y          | 9.5J         | 271                | 745                   | 925            | 350                     | 360 A A | TL    |
|            | 275/40ZR21 XL    | 107Y          | 9.5J         | 278                | 753                   | 975            | 350                     | 360 A A | TL    |
|            | 285/40ZR21 XL    | 109Y          | 10.0J        | 290                | 761                   | 1030           | 350                     | 360 A A | TL    |
|            | 295/40ZR21 XL EV | 111Y          | 10.5J        | 301                | 769                   | 1090           | 350                     | 360 A A | TL    |
|            | 315/40ZR21       | 111Y          | 11.0J        | 320                | 785                   | 1090           | 300                     | 360 A A | TL    |
|            | 235/45ZR21 XL EV | 101Y          | 8.0J         | 236                | 745                   | 825            | 350                     | 360 A A | TL    |
|            | 255/45ZR21 XL EV | 106W          | 8.5J         | 255                | 763                   | 950            | 350                     | 360 A A | TL    |
|            | 265/45ZR21 XL EV | 108Y          | 9.0J         | 266                | 771                   | 1000           | 350                     | 360 A A | TL    |
| 24"        | 275/45ZR21 XL    | 110Y          | 9.0J         | 273                | 781                   | 1060           | 350                     | 360 A A | TL    |
|            | 285/45ZR21 XL    | 113Y          | 9.5J         | 285                | 789                   | 1150           | 350                     | 360 A A | TL    |
|            | 285/35ZR22 XL EV | 106Y          | 10.0J        | 290                | 759                   | 950            | 350                     | 360 A A | TL    |
|            | 325/35ZR22       | 110Y          | 11.5J        | 331                | 787                   | 1060           | 300                     | 360 A A | TL    |
|            | 265/40R22 XL     | 106V          | 9.5J         | 271                | 771                   | 950            | 350                     | 360 A A | TL    |
|            | 275/40ZR22 XL    | 107Y          | 9.5J         | 278                | 779                   | 975            | 350                     | 360 A A | TL    |
|            | 285/40ZR22 XL    | 110Y          | 10.0J        | 290                | 787                   | 1060           | 350                     | 360 A A | TL    |
|            | 325/40ZR22 XL    | 114Y          | 11.5J        | 331                | 819                   | 1180           | 300                     | 360 A A | TL    |
|            | 255/45ZR22 XL    | 107Y          | 8.5J         | 255                | 789                   | 975            | 350                     | 360 A A | TL    |
|            | 275/45ZR22 XL    | 112Y          | 9.0J         | 273                | 807                   | 1120           | 350                     | 360 A A | TL    |
|            | 285/45ZR22 XL    | 114W          | 9.5J         | 285                | 815                   | 1180           | 350                     | 360 A A | TL    |
|            | 285/35ZR23 XL    | 107Y          | 10.0J        | 290                | 784                   | 975            | 350                     | 360 A A | TL    |
|            | 285/40ZR23 XL    | 111Y          | 10.0J        | 290                | 812                   | 1090           | 350                     | 360 A A | TL    |



SPORT SA-37



Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel



M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 24 |
| Series       | 30 - 65 |
| Speed Rating | H - Y   |

SPORT SA-37

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kPa) | UTQG     | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|----------|-------|
| 15"        | 195/45R15    | 78V           | 6.5J         | 195                | 557                   | 425            | 300                     | 280 AA A | TL    |
|            | 195/50R15    | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 280 AA A | TL    |
|            | 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 280 AA A | TL    |
|            | 195/65R15    | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 280 AA A | TL    |
| 16"        | 195/45R16 XL | 84V           | 6.5J         | 195                | 582                   | 500            | 350                     | 280 AA A | TL    |
|            | 205/45Z16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 280 AA A | TL    |
|            | 195/50R16    | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 280 AA A | TL    |
|            | 205/50R16    | 87W           | 6.5J         | 214                | 612                   | 545            | 300                     | 280 AA A | TL    |
|            | 225/50R16    | 92W           | 7.0J         | 233                | 632                   | 630            | 300                     | 280 AA A | TL    |
|            | 205/55R16    | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 280 AA A | TL    |
|            | 205/55R16 XL | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 280 AA A | TL    |
|            | 215/55R16    | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 280 AA A | TL    |
|            | 225/55R16 XL | 99W           | 7.0J         | 233                | 654                   | 775            | 350                     | 280 AA A | TL    |
| 17"        | 185/35R17    | 74V           | 6.5J         | 188                | 562                   | 375            | 350                     | 280 AA A | TL    |
|            | 165/40R17 XL | 72V           | 6.0J         | 170                | 564                   | 355            | 300                     | 280 AA A | TL    |
|            | 195/40Z17 XL | 81W           | 7.0J         | 200                | 588                   | 462            | 350                     | 280 AA A | TL    |
|            | 205/40Z17 XL | 84Y           | 7.5J         | 212                | 596                   | 500            | 350                     | 280 AA A | TL    |
|            | 215/40Z17 XL | 87Y           | 7.5J         | 218                | 604                   | 545            | 350                     | 280 AA A | TL    |
|            | 245/40Z17 XL | 95Y           | 8.5J         | 248                | 628                   | 690            | 350                     | 280 AA A | TL    |
|            | 205/45Z17 XL | 88Y           | 7.0J         | 206                | 616                   | 560            | 350                     | 280 AA A | TL    |
|            | 215/45Z17 XL | 91Y           | 7.0J         | 213                | 626                   | 615            | 350                     | 280 AA A | TL    |
|            | 225/45Z17 XL | 94Y           | 7.5J         | 225                | 634                   | 670            | 350                     | 280 AA A | TL    |
|            | 235/45Z17 XL | 97Y           | 8.0J         | 236                | 644                   | 730            | 350                     | 280 AA A | TL    |
|            | 245/45Z17 XL | 99W           | 8.0J         | 243                | 652                   | 775            | 350                     | 280 AA A | TL    |
|            | 255/45Z17 XL | 102W          | 8.5J         | 255                | 662                   | 850            | 350                     | 280 AA A | TL    |
|            | 205/50R17 XL | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 280 AA A | TL    |
|            | 215/50R17 XL | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 280 AA A | TL    |
|            | 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 280 AA A | TL    |
|            | 235/50R17    | 96V           | 7.5J         | 245                | 668                   | 710            | 300                     | 280 AA A | TL    |
|            | 205/55R17 XL | 95W           | 6.5J         | 214                | 658                   | 690            | 350                     | 280 AA A | TL    |
|            | 215/55R17 XL | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 280 AA A | TL    |
|            | 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 280 AA A | TL    |
|            | 235/55R17 XL | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 280 AA A | TL    |
| 18"        | 165/35R18    | 69V           | 6.0J         | 170                | 573                   | 325            | 350                     | 280 AA A | TL    |
|            | 215/35Z18 XL | 84W           | 7.5J         | 218                | 607                   | 500            | 350                     | 280 AA A | TL    |
|            | 225/35Z18 XL | 87Y           | 8.0J         | 230                | 615                   | 545            | 350                     | 280 AA A | TL    |
|            | 245/35Z18 XL | 92W           | 8.5J         | 248                | 629                   | 630            | 350                     | 280 AA A | TL    |
|            | 265/35Z18 XL | 97Y           | 9.5J         | 271                | 643                   | 730            | 350                     | 280 AA A | TL    |
|            | 165/40R18    | 73V           | 6.0J         | 170                | 589                   | 365            | 350                     | 280 AA A | TL    |
|            | 215/40Z18 XL | 89Y           | 7.5J         | 218                | 629                   | 580            | 350                     | 280 AA A | TL    |
|            | 225/40Z18 XL | 92Y           | 8.0J         | 230                | 637                   | 630            | 350                     | 280 AA A | TL    |
|            | 235/40Z18 XL | 95Y           | 8.5J         | 241                | 645                   | 690            | 350                     | 280 AA A | TL    |
|            | 245/40Z18 XL | 97Y           | 8.5J         | 248                | 653                   | 730            | 350                     | 280 AA A | TL    |
|            | 255/40Z18 XL | 99Y           | 9.0J         | 260                | 661                   | 775            | 350                     | 280 AA A | TL    |
|            | 215/45Z18 XL | 93Y           | 7.0J         | 213                | 651                   | 650            | 350                     | 280 AA A | TL    |
|            | 225/45Z18 XL | 95Y           | 7.5J         | 225                | 659                   | 690            | 350                     | 280 AA A | TL    |
|            | 235/45Z18 XL | 98Y           | 8.0J         | 236                | 669                   | 750            | 350                     | 280 AA A | TL    |
|            | 245/45Z18 XL | 100Y          | 8.0J         | 243                | 677                   | 800            | 350                     | 280 AA A | TL    |
| 18"        | 255/45Z18    | 99W           | 8.5J         | 255                | 687                   | 775            | 300                     | 280 AA A | TL    |
|            | 225/50R18    | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 280 AA A | TL    |
|            | 235/50R18 XL | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | 280 AA A | TL    |
|            | 245/50R18    | 100W          | 7.5J         | 253                | 703                   | 800            | 300                     | 280 AA A | TL    |
|            | 215/55R18 XL | 99V           | 7.0J         | 226                | 693                   | 775            | 350                     | 280 AA A | TL    |
|            | 255/55R18 XL | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 280 AA A | TL    |
|            | 265/60R18    | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 280 AA A | TL    |
| 19"        | 265/30Z19 XL | 93Y           | 9.5J         | 271                | 643                   | 650            | 350                     | 280 AA A | TL    |
|            | 275/30Z19 XL | 96Y           | 9.5J         | 278                | 649                   | 710            | 250                     | 280 AA A | TL    |
|            | 235/35Z19 XL | 91Y           | 8.5J         | 241                | 647                   | 615            | 350                     | 280 AA A | TL    |
|            | 245/35Z19 XL | 93Y           | 8.5J         | 248                | 655                   | 650            | 350                     | 280 AA A | TL    |
|            | 255/35Z19 XL | 96Y           | 9.0J         | 260                | 661                   | 710            | 350                     | 280 AA A | TL    |
|            | 275/35Z19 XL | 100W          | 9.5J         | 278                | 675                   | 800            | 350                     | 280 AA A | TL    |
|            | 225/40Z19 XL | 93Y           | 8.0J         | 230                | 663                   | 650            | 350                     | 280 AA A | TL    |
|            | 235/40Z19    | 96Y           | 8.5J         | 241                | 671                   | 710            | 350                     | 280 AA A | TL    |
|            | 245/40Z19 XL | 98Y           | 8.5J         | 248                | 679                   | 750            | 350                     | 280 AA A | TL    |
|            | 255/40Z19 XL | 100Y          | 9.0J         | 260                | 687                   | 800            | 350                     | 280 AA A | TL    |
|            | 225/45Z19 XL | 96Y           | 7.5J         | 225                | 685                   | 710            | 350                     | 280 AA A | TL    |
|            | 245/45Z19    | 98Y           | 8.0J         | 243                | 703                   | 750            | 300                     | 280 AA A | TL    |
|            | 255/45Z19 XL | 104Y          | 8.5J         | 255                | 713                   | 900            | 350                     | 280 AA A | TL    |
|            | 235/50R19    | 99W           | 7.5J         | 245                | 719                   | 775            | 300                     | 280 AA A | TL    |
| 20"        | 225/30Z20 XL | 85Y           | 8.0J         | 230                | 644                   | 515            | 350                     | 280 AA A | TL    |
|            | 275/30Z20 XL | 97Y           | 9.5J         | 278                | 674                   | 730            | 350                     | 280 AA A | TL    |
|            | 225/35Z20 XL | 90W           | 8.0J         | 230                | 666                   | 600            | 350                     | 280 AA A | TL    |
|            | 245/35Z20 XL | 95Y           | 8.5J         | 248                | 680                   | 690            | 350                     | 280 AA A | TL    |
|            | 255/35Z20 XL | 97W           | 9.0J         | 260                | 686                   | 730            | 350                     | 280 AA A | TL    |
|            | 275/35Z20 XL | 102W          | 9.5J         | 278                | 700                   | 850            | 350                     | 280 AA A | TL    |
|            | 245/40Z20 XL | 99W           | 8.5J         | 248                | 704                   | 775            | 350                     | 280 AA A | TL    |
|            | 245/45Z20    | 99W           | 8.0J         | 243                | 728                   | 775            | 300                     | 280 AA A | TL    |
|            | 255/45Z20 XL | 105W          | 8.5J         | 255                | 748                   | 925            | 350                     | 280 AA A | TL    |
|            | 265/45Z20 XL | 108W          | 9.0J         | 266                | 746                   | 1000           | 350                     | 280 AA A | TL    |
|            | 245/50R20    | 102W          | 7.5J         | 253                | 754                   | 850            | 300                     | 280 AA A | TL    |
|            | 265/50R20 XL | 111W          | 8.5J         | 277                | 774                   | 1090           | 350                     | 280 AA A | TL    |
|            | 275/50R20 XL | 113W          | 8.5J         | 284                | 784                   | 1150           | 350                     | 280 AA A | TL    |
|            | 235/55R20 XL | 105W          | 7.5J         | 245                | 766                   | 925            | 350                     | 280 AA A | TL    |
|            | 255/55R20 XL | 110W          | 8.0J         | 265                | 788                   | 1060           | 350                     | 280 AA A | TL    |
| 21"        | 295/35Z21 XL | 107Y          | 10.5J        | 301                | 739                   | 975            | 350                     | 280 AA A | TL    |
|            | 265/40Z21 XL | 105W          | 9.5J         | 271                | 745                   | 925            | 350                     | 280 AA A | TL    |
|            | 295/40Z21    | 111W          | 10.5         | 301                | 769                   | 1090           | 350                     | 280 AA A | TL    |
|            | 315/40Z21    | 111Y          | 11.0J        | 320                | 785                   | 1090           | 300                     | 280 AA A | TL    |
|            | 265/45Z21    | 104W          | 9.0J         | 266                | 771                   | 900            | 300                     | 280 AA A | TL    |
|            | 275/45Z21 XL | 110Y          | 9.0J         | 273                | 781                   | 1060           | 350                     | 280 AA A | TL    |
| 22"        | 235/30Z22 XL | 90Y           | 8.5J         | 241                | 701                   | 600            | 350                     | 280 AA A | TL    |
|            | 245/30Z22 XL | 92Y           | 8.5J         | 248                | 707                   | 630            | 350                     | 280 AA A | TL    |
|            | 285/45R22 XL | 114V          | 9.5J         | 285                | 815                   | 1180           | 350                     | 280 AA A | TL    |
| 24"        | 275/25Z24 XL | 96Y           | 10.0J        | 283                | 748                   | 710            | 350                     | 280 AA A | TL    |
|            | 255/30Z24 XL | 97Y           | 9.0J         | 260                | 764                   | 730            | 350                     | 280 AA A | TL    |

● Made in China ● Made in Thailand




ZUPERACE SA-57



Benefits and Features

- New generation of directional Ultra High Performance tyre
- Circumferential V-grooves ensure outstanding water drainage
- Strong center ribs provides remarkable handling while steering
- Improved SILICA compounding enhance the wet and dry grip



M+S

|              |         |
|--------------|---------|
| Rim Size     | 14 - 24 |
| Series       | 30 - 65 |
| Speed Rating | H - W   |

ZUPERACE SA-57

| Rim (inch) | Size          | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|---------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 14"        | 185/60R14     | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 460 A A | TL    |
|            | 175/65R14     | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 460 A A | TL    |
|            | 185/65R14     | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 460 A A | TL    |
| 15"        | 195/50R15     | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 460 A A | TL    |
|            | 185/55R15     | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 460 A A | TL    |
|            | 195/55R15     | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 460 A A | TL    |
|            | 185/60R15     | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 460 A A | TL    |
|            | 195/60R15     | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 460 A A | TL    |
|            | 195/65R15     | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 460 A A | TL    |
| 16"        | 205/45ZR16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 460 A A | TL    |
|            | 195/50R16     | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 460 A A | TL    |
|            | 205/50R16     | 87W           | 6.5J         | 214                | 612                   | 545            | 300                     | 460 A A | TL    |
|            | 225/50R16     | 92W           | 7.0J         | 233                | 632                   | 630            | 300                     | 460 A A | TL    |
|            | 205/55R16 XL  | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 460 A A | TL    |
|            | 215/55R16 XL  | 97W           | 7.0J         | 226                | 642                   | 730            | 350                     | 460 A A | TL    |
|            | 225/55R16 XL  | 99W           | 7.0J         | 233                | 654                   | 775            | 350                     | 460 A A | TL    |
|            | 235/60R16     | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 460 A A | TL    |
| 17"        | 205/40ZR17 XL | 84W           | 7.5J         | 212                | 596                   | 500            | 350                     | 460 A A | TL    |
|            | 215/40ZR17 XL | 87W           | 7.5J         | 218                | 604                   | 545            | 350                     | 460 A A | TL    |
|            | 245/40ZR17 XL | 95W           | 8.5J         | 248                | 628                   | 690            | 350                     | 460 A A | TL    |
|            | 205/45ZR17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 460 A A | TL    |
|            | 215/45ZR17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 460 A A | TL    |
|            | 225/45ZR17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 460 A A | TL    |
|            | 235/45ZR17 XL | 97W           | 8.0J         | 236                | 644                   | 730            | 350                     | 460 A A | TL    |
|            | 205/50R17 XL  | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 460 A A | TL    |
|            | 215/50R17 XL  | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 460 A A | TL    |
|            | 225/50R17 XL  | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 460 A A | TL    |
|            | 215/55R17 XL  | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 460 A A | TL    |
|            | 225/55R17 XL  | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 460 A A | TL    |
| 18"        | 235/55R17 XL  | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 460 A A | TL    |
|            | 265/35ZR18 XL | 97W           | 9.5J         | 271                | 643                   | 730            | 350                     | 460 A A | TL    |
| 18"        | 225/40ZR18 XL | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 460 A A | TL    |
|            | 235/40ZR18 XL | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 460 A A | TL    |
|            | 245/40ZR18 XL | 97W           | 8.5J         | 248                | 653                   | 730            | 350                     | 460 A A | TL    |
|            | 225/45ZR18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 460 A A | TL    |
|            | 235/45ZR18 XL | 98W           | 8.0J         | 236                | 669                   | 750            | 350                     | 460 A A | TL    |
|            | 245/45ZR18 XL | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 460 A A | TL    |
|            | 225/50R18     | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 460 A A | TL    |
|            | 235/50R18 XL  | 101W          | 7.5J         | 245                | 693                   | 825            | 350                     | 460 A A | TL    |
|            | 255/55R18 XL  | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 460 A A | TL    |
|            | 265/60R18     | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 460 A A | TL    |
| 19"        | 215/35ZR19 XL | 85W           | 7.5J         | 218                | 633                   | 515            | 350                     | 460 A A | TL    |
|            | 225/35ZR19 XL | 88W           | 8.0J         | 230                | 641                   | 560            | 350                     | 460 A A | TL    |
|            | 245/45ZR19 XL | 102W          | 8.0J         | 243                | 703                   | 850            | 350                     | 460 A A | TL    |
|            | 255/45ZR19 XL | 104W          | 8.5J         | 255                | 713                   | 900            | 350                     | 460 A A | TL    |
| 20"        | 205/30ZR20    | 80W           | 7.5J         | 212                | 632                   | 450            | 350                     | 460 A A | TL    |
|            | 215/30ZR20    | 82W           | 7.5J         | 218                | 638                   | 475            | 350                     | 460 A A | TL    |
|            | 245/30ZR20 XL | 90W           | 8.5J         | 248                | 656                   | 600            | 350                     | 460 A A | TL    |
|            | 275/40ZR20 XL | 106W          | 9.5J         | 278                | 728                   | 950            | 350                     | 460 A A | TL    |
|            | 255/45R20 XL  | 105V          | 8.5J         | 255                | 738                   | 925            | 350                     | 460 A A | TL    |
|            | 275/45R20 XL  | 110V          | 9.0J         | 273                | 756                   | 1060           | 350                     | 460 A A | TL    |
|            | 265/50R20 XL  | 111V          | 8.5J         | 277                | 774                   | 1090           | 350                     | 460 A A | TL    |
|            | 285/50R20     | 112V          | 9.0J         | 297                | 794                   | 1120           | 300                     | 460 A A | TL    |
| 22"        | 275/55R20 XL  | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 460 A A | TL    |
|            | 275/60R20 XL  | 119V          | 8.0J         | 279                | 838                   | 1360           | 350                     | 460 A A | TL    |
|            | 265/35R22 XL  | 102V          | 9.5J         | 271                | 745                   | 850            | 350                     | 460 A A | TL    |
|            | 285/35R22 XL  | 106V          | 10.0J        | 290                | 759                   | 950            | 350                     | 460 A A | TL    |
|            | 265/40R22 XL  | 106V          | 9.5J         | 271                | 771                   | 950            | 350                     | 460 A A | TL    |
| 24"        | 305/40R22 XL  | 114V          | 11.0J        | 313                | 803                   | 1180           | 350                     | 460 A A | TL    |
|            | 305/45R22 XL  | 118V          | 10.0J        | 303                | 833                   | 1320           | 350                     | 460 A A | TL    |
|            | 295/35R24 XL  | 110V          | 10.5J        | 301                | 816                   | 1060           | 350                     | 460 A A | TL    |

● Made in China ● Made in Thailand







ZuperFlex<sup>Z-117</sup>



Benefits and Features

- High-performance passenger tyre with superior handling and lower rolling resistance
- Circumferential 4 channel grooves provides excellent wet performance through rapid drainage
- The contact area is widened instantaneously when braking by groove chamfer
- The asymmetric tread with solid outside block enhances cornering capability

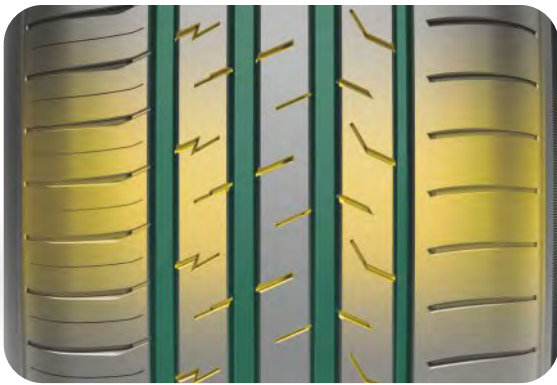

Silent



Comfortable



Braking



Efficiency

|              |         |
|--------------|---------|
| Rim Size     | 13 - 19 |
| Series       | 45 - 80 |
| Speed Rating | T - W   |

ZuperFlex<sup>Z-117</sup>

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kPa) | UTQG    | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 13"        | 175/70R13    | 82T           | 5.0J         | 177                | 576                   | 475            | 300                     | 360 A A | TL    |
|            | 165/80R13    | 83T           | 4.5J         | 165                | 594                   | 487            | 300                     | 360 A A | TL    |
| 14"        | 165/55R14    | 72V           | 5.0J         | 170                | 538                   | 355            | 300                     | 360 A A | TL    |
|            | 185/60R14    | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 360 A A | TL    |
|            | 175/65R14    | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 360 A A | TL    |
|            | 185/65R14    | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 360 A A | TL    |
|            | 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 360 A A | TL    |
|            | 185/70R14    | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 360 A A | TL    |
|            | 195/70R14    | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 360 A A | TL    |
| 15"        | 165/50R15 XL | 76V           | 5.0J         | 170                | 547                   | 400            | 350                     | 360 A A | TL    |
|            | 195/50R15    | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 360 A A | TL    |
|            | 185/55R15    | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 360 A A | TL    |
|            | 195/55R15    | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 360 A A | TL    |
|            | 185/60R15    | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 360 A A | TL    |
|            | 195/60R15    | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 360 A A | TL    |
|            | 175/65R15    | 84H           | 5.0J         | 177                | 609                   | 500            | 300                     | 360 A A | TL    |
|            | 185/65R15    | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 360 A A | TL    |
|            | 195/65R15    | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | 360 A A | TL    |
|            | 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 360 A A | TL    |
|            | 205/70R15    | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 360 A A | TL    |
|            | 215/70R15    | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 360 A A | TL    |
|            | 225/70R15    | 100H          | 6.5J         | 228                | 697                   | 800            | 300                     | 360 A A | TL    |
| 16"        | 205/45R16 XL | 87W           | 7.0J         | 206                | 590                   | 545            | 350                     | 360 A A | TL    |
|            | 195/50R16    | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 360 A A | TL    |
|            | 205/50R16    | 87V           | 6.5J         | 214                | 612                   | 545            | 300                     | 360 A A | TL    |
|            | 185/55R16    | 83V           | 6.0J         | 194                | 610                   | 487            | 300                     | 360 A A | TL    |
|            | 205/55R16 XL | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 360 A A | TL    |
|            | 205/60R16    | 92V           | 6.0J         | 209                | 652                   | 630            | 300                     | 360 A A | TL    |
|            | 215/60R16 XL | 99V           | 6.5J         | 221                | 664                   | 775            | 350                     | 360 A A | TL    |
|            | 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 360 A A | TL    |
|            | 205/65R16    | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 360 A A | TL    |
|            | 215/65R16    | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | 360 A A | TL    |
|            | 215/70R16    | 100H          | 6.5J         | 221                | 708                   | 800            | 300                     | 360 A A | TL    |
| 16"        | 225/70R16    | 103H          | 6.5J         | 228                | 722                   | 875            | 300                     | 360 A A | TL    |
|            | 235/70R16    | 106H          | 7.0J         | 240                | 736                   | 950            | 300                     | 360 A A | TL    |
|            | 245/70R16 XL | 111H          | 7.0J         | 248                | 750                   | 1090           | 350                     | 360 A A | TL    |
|            | 265/70R16    | 112H          | 8.0J         | 272                | 778                   | 1120           | 300                     | 360 A A | TL    |
|            | 275/70R16    | 114H          | 8.0J         | 279                | 792                   | 1180           | 300                     | 360 A A | TL    |
| 17"        | 205/45R17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 360 A A | TL    |
|            | 215/45R17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 360 A A | TL    |
|            | 225/45R17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 360 A A | TL    |
|            | 215/50R17 XL | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 360 A A | TL    |
|            | 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 360 A A | TL    |
|            | 215/55R17 XL | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 360 A A | TL    |
|            | 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 360 A A | TL    |
|            | 215/60R17    | 96V           | 6.5J         | 221                | 690                   | 710            | 300                     | 360 A A | TL    |
|            | 225/60R17    | 99H           | 6.5J         | 228                | 702                   | 775            | 300                     | 360 A A | TL    |
|            | 225/65R17    | 102H          | 6.5J         | 228                | 724                   | 850            | 300                     | 360 A A | TL    |
|            | 235/65R17 XL | 108H          | 7.0J         | 240                | 738                   | 1000           | 350                     | 360 A A | TL    |
|            | 245/65R17    | 107H          | 7.0J         | 248                | 750                   | 975            | 300                     | 360 A A | TL    |
|            | 265/65R17    | 112H          | 8.0J         | 272                | 776                   | 1120           | 300                     | 360 A A | TL    |
|            | 285/65R17    | 116H          | 8.5J         | 292                | 802                   | 1250           | 300                     | 360 A A | TL    |
|            | 265/70R17    | 115H          | 8.0J         | 272                | 804                   | 1215           | 300                     | 360 A A | TL    |
| 18"        | 225/45R18 XL | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 360 A A | TL    |
|            | 235/45R18 XL | 98W           | 8.0J         | 236                | 669                   | 750            | 350                     | 360 A A | TL    |
|            | 245/45R18 XL | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 360 A A | TL    |
|            | 235/50R18 XL | 101V          | 7.5J         | 245                | 683                   | 825            | 350                     | 360 A A | TL    |
|            | 235/55R18    | 100V          | 7.0J         | 245                | 715                   | 800            | 300                     | 360 A A | TL    |
|            | 235/60R18 XL | 107V          | 7.0J         | 240                | 739                   | 975            | 350                     | 360 A A | TL    |
|            | 245/60R18    | 105H          | 7.0J         | 248                | 751                   | 925            | 300                     | 360 A A | TL    |
|            | 265/60R18    | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 360 A A | TL    |
|            | 285/60R18    | 116H          | 8.5J         | 292                | 799                   | 1250           | 300                     | 360 A A | TL    |
|            | 265/65R18    | 114H          | 8.0J         | 272                | 801                   | 1180           | 300                     | 360 A A | TL    |
|            | 275/65R18    | 116H          | 8.0J         | 279                | 815                   | 1250           | 300                     | 360 A A | TL    |
| 19"        | 235/55R19 XL | 105V          | 7.5J         | 245                | 741                   | 925            | 350                     | 360 A A | TL    |

Made in Thailand





ZuperEco Z-108



Benefits and Features

- High comfort touring tyre for all season and paved roads
- Improved tyre structure guarantees a smooth ride and safe handing
- Five strong tread ribs enhanced steering precision and mileage
- Variable pitch tread design helps reduce noise



|              |         |
|--------------|---------|
| Rim Size     | 13 - 20 |
| Series       | 35 - 80 |
| Speed Rating | T - W   |

ZuperEco Z-108

| Rim (inch) | Size      | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL | Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|-----------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 13"        | 155/65R13 | 73T           | 4.5J         | 157                | 532                   | 365            | 300                     | 480 A A | TL    | 16"        | 195/55R16    | 87V           | 6.0J         | 201                | 620                   | 545            | 300                     | 480 A A | TL    |
|            | 165/65R13 | 77T           | 5.0J         | 170                | 544                   | 412            | 300                     | 480 A A | TL    |            | 205/55R16    | 94W           | 6.5J         | 214                | 632                   | 670            | 350                     | 480 A A | TL    |
|            | 155/70R13 | 75T           | 4.5J         | 157                | 548                   | 387            | 300                     | 480 A A | TL    |            | 215/55R16    | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 480 A A | TL    |
|            | 165/70R13 | 79T           | 5.0J         | 170                | 562                   | 437            | 300                     | 480 A A | TL    |            | 225/55R16    | 95V           | 7.0J         | 233                | 654                   | 690            | 300                     | 480 A A | TL    |
|            | 175/70R13 | 82T           | 5.0J         | 177                | 576                   | 475            | 300                     | 480 A A | TL    |            | 195/60R16    | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 480 A A | TL    |
|            | 185/70R13 | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 480 A A | TL    |            | 205/60R16    | 92V           | 6.0J         | 209                | 652                   | 630            | 300                     | 480 A A | TL    |
|            | 175/75R13 | 85T           | 5.0J         | 177                | 592                   | 515            | 300                     | 480 A A | TL    |            | 215/60R16 XL | 99V           | 6.5J         | 221                | 664                   | 775            | 350                     | 480 A A | TL    |
|            | 155/80R13 | 79T           | 4.5J         | 157                | 578                   | 437            | 300                     | 480 A A | TL    |            | 225/60R16    | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 480 A A | TL    |
| 14"        | 165/55R14 | 72T           | 5.0J         | 170                | 538                   | 355            | 300                     | 480 A A | TL    | 17"        | 235/60R16    | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 480 A A | TL    |
|            | 165/60R14 | 75H           | 5.0J         | 170                | 554                   | 387            | 300                     | 480 A A | TL    |            | 205/65R16    | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 480 A A | TL    |
|            | 185/60R14 | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 480 A A | TL    |            | 215/65R16    | 98V           | 6.5J         | 221                | 686                   | 750            | 300                     | 480 A A | TL    |
|            | 195/60R14 | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 480 A A | TL    |            | 205/40R17 XL | 84W           | 7.5J         | 212                | 596                   | 500            | 350                     | 480 A A | TL    |
|            | 205/60R14 | 88H           | 6.0J         | 209                | 602                   | 560            | 300                     | 480 A A | TL    |            | 215/40R17XL  | 87W           | 7.5J         | 218                | 604                   | 545            | 350                     | 480 A A | TL    |
|            | 155/65R14 | 75T           | 4.5J         | 157                | 558                   | 387            | 300                     | 480 A A | TL    |            | 205/45R17 XL | 88W           | 7.0J         | 206                | 616                   | 560            | 350                     | 480 A A | TL    |
|            | 165/65R14 | 79H           | 5.0J         | 170                | 570                   | 437            | 300                     | 480 A A | TL    |            | 215/45R17 XL | 91W           | 7.0J         | 213                | 626                   | 615            | 350                     | 480 A A | TL    |
|            | 165/70R14 | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 480 A A | TL    |            | 225/45R17 XL | 94W           | 7.5J         | 225                | 634                   | 670            | 350                     | 480 A A | TL    |
| 15"        | 205/70R14 | 95T           | 6.0J         | 209                | 644                   | 690            | 300                     | 480 A A | TL    | 18"        | 235/45R17 XL | 97W           | 8.0J         | 236                | 644                   | 730            | 350                     | 480 A A | TL    |
|            | 175/65R14 | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 480 A A | TL    |            | 205/50R17 XL | 93W           | 6.5J         | 214                | 638                   | 650            | 350                     | 480 A A | TL    |
|            | 185/65R14 | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 480 A A | TL    |            | 215/50R17XL  | 95W           | 7.0J         | 226                | 648                   | 690            | 350                     | 480 A A | TL    |
|            | 175/70R14 | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 480 A A | TL    |            | 225/50R17 XL | 98W           | 7.0J         | 233                | 658                   | 750            | 350                     | 480 A A | TL    |
|            | 185/70R14 | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 480 A A | TL    |            | 215/55R17 XL | 98W           | 7.0J         | 226                | 668                   | 750            | 350                     | 480 A A | TL    |
|            | 195/70R14 | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 480 A A | TL    |            | 225/55R17 XL | 101W          | 7.0J         | 233                | 680                   | 825            | 350                     | 480 A A | TL    |
|            | 175/75R14 | 87T           | 5.0J         | 177                | 618                   | 545            | 300                     | 480 A A | TL    |            | 235/55R17 XL | 103W          | 7.5J         | 245                | 690                   | 875            | 350                     | 480 A A | TL    |
|            | 195/50R15 | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 480 A A | TL    | 19"        | 225/40R18    | 92W           | 8.0J         | 230                | 637                   | 630            | 350                     | 480 A A | TL    |
| 16"        | 165/55R15 | 75V           | 5.0J         | 170                | 563                   | 387            | 300                     | 480 A A | TL    |            | 235/40R18    | 95W           | 8.5J         | 241                | 645                   | 690            | 350                     | 480 A A | TL    |
|            | 185/55R15 | 82V           | 6.0J         | 194                | 585                   | 475            | 300                     | 480 A A | TL    |            | 245/40R18    | 97W           | 8.5J         | 248                | 653                   | 730            | 350                     | 480 A A | TL    |
|            | 195/55R15 | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 480 A A | TL    |            | 215/45R18    | 93W           | 7.0J         | 213                | 651                   | 650            | 350                     | 480 A A | TL    |
|            | 165/60R15 | 77H           | 5.0J         | 170                | 579                   | 412            | 300                     | 480 A A | TL    |            | 225/45R18    | 95W           | 7.5J         | 225                | 659                   | 690            | 350                     | 480 A A | TL    |
|            | 185/60R15 | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 480 A A | TL    |            | 235/45R18    | 98W           | 8.0J         | 236                | 669                   | 750            | 350                     | 480 A A | TL    |
|            | 195/60R15 | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 480 A A | TL    |            | 245/45R18    | 100W          | 8.0J         | 243                | 677                   | 800            | 350                     | 480 A A | TL    |
|            | 205/60R15 | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 480 A A | TL    |            | 225/50R18    | 95W           | 7.0J         | 233                | 683                   | 690            | 300                     | 480 A A | TL    |
|            | 165/65R15 | 81H           | 5.0J         | 170                | 595                   | 462            | 300                     | 480 A A | TL    |            | 235/50R18    | 97V           | 7.5J         | 245                | 693                   | 730            | 300                     | 480 A A | TL    |
| 16"        | 175/65R15 | 84H           | 5.0J         | 177                | 609                   | 500            | 300                     | 480 A A | TL    | 20"        | 215/55R18    | 99V           | 7.0J         | 226                | 693                   | 775            | 350                     | 480 A A | TL    |
|            | 185/65R15 | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 480 A A | TL    |            | 225/55R18    | 98V           | 7.0J         | 233                | 705                   | 750            | 300                     | 480 A A | TL    |
|            | 195/65R15 | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 480 A A | TL    |            | 235/55R18    | 100V          | 7.5J         | 245                | 715                   | 800            | 300                     | 480 A A | TL    |
|            | 205/65R15 | 94V           | 6.0J         | 209                | 647                   | 670            | 300                     | 480 A A | TL    |            | 225/60R18    | 100H          | 6.5J         | 228                | 727                   | 800            | 300                     | 480 A A | TL    |
|            | 205/70R15 | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 480 A A | TL    |            | 235/60R18    | 107V          | 7.0J         | 240                | 739                   | 975            | 350                     | 480 A A | TL    |
|            | 215/70R15 | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 480 A A | TL    |            | 245/35R19    | 93W           | 8.5J         | 248                | 655                   | 650            | 350                     | 480 A A | TL    |
|            | 195/50R16 | 84V           | 6.0J         | 201                | 602                   | 500            | 300                     | 480 A A | TL    |            | 245/40R19    | 94W           | 8.5J         | 248                | 679                   | 670            | 300                     | 480 A A | TL    |
|            | 185/55R16 | 83V           | 6.0J         | 195                | 610                   | 487            | 300                     | 480 A A | TL    |            | 245/35R20 XL | 95W           | 8.5J         | 248                | 680                   | 690            | 350                     | 480 A A | TL    |

● Made in China






RP36



Benefits and Features

- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

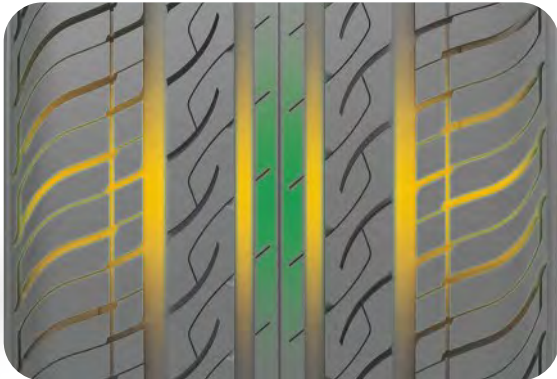

M+S

|              |         |
|--------------|---------|
| Rim Size     | 13 - 16 |
| Series       | 50 - 70 |
| Speed Rating | T - V   |

RP36

| Rim (inch) | Size      | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|-----------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 13"        | 155/65R13 | 73T           | 4.5B         | 157                | 532                   | 365            | 300                     | 440 A A | TL    |
|            | 165/65R13 | 77T           | 5.0B         | 170                | 544                   | 412            | 300                     | 440 A A | TL    |
|            | 155/70R13 | 75T           | 4.5B         | 157                | 548                   | 387            | 300                     | 440 A A | TL    |
|            | 165/70R13 | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | 440 A A | TL    |
|            | 175/70R13 | 82T           | 5.0B         | 177                | 576                   | 475            | 300                     | 440 A A | TL    |
|            | 185/70R13 | 86T           | 5.5J         | 189                | 590                   | 530            | 300                     | 480 A A | TL    |
| 14"        | 165/60R14 | 75H           | 5.0J         | 170                | 554                   | 387            | 300                     | 440 A A | TL    |
|            | 185/60R14 | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | 480 A A | TL    |
|            | 195/60R14 | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | 480 A A | TL    |
|            | 155/65R14 | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | 440 A A | TL    |
|            | 175/65R14 | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | 440 A A | TL    |
|            | 185/65R14 | 86H           | 5.5J         | 189                | 596                   | 530            | 300                     | 480 A A | TL    |
| 15"        | 165/70R14 | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | 440 A A | TL    |
|            | 175/70R14 | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 440 A A | TL    |
|            | 185/70R14 | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | 480 A A | TL    |
|            | 195/70R14 | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | 480 A A | TL    |
|            | 195/50R15 | 82V           | 6.0J         | 201                | 577                   | 475            | 300                     | 360 A A | TL    |
|            | 195/55R15 | 85V           | 6.0J         | 201                | 595                   | 515            | 300                     | 360 A A | TL    |
| 15"        | 185/60R15 | 84H           | 5.5J         | 189                | 603                   | 500            | 300                     | 480 A A | TL    |
|            | 195/60R15 | 88V           | 6.0J         | 201                | 615                   | 560            | 300                     | 360 A A | TL    |
|            | 205/60R15 | 91H           | 6.0J         | 209                | 627                   | 615            | 300                     | 480 A A | TL    |
|            | 185/65R15 | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | 480 A A | TL    |
|            | 195/65R15 | 91V           | 6.0J         | 201                | 635                   | 615            | 300                     | 360 A A | TL    |
|            | 205/65R15 | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 480 A A | TL    |
| 16"        | 205/70R15 | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 480 A A | TL    |
|            | 215/70R15 | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | 480 A A | TL    |
|            | 195/55R16 | 87V           | 6.0J         | 201                | 620                   | 545            | 300                     | 360 A A | TL    |
|            | 205/55R16 | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | 360 A A | TL    |
|            | 215/55R16 | 93V           | 7.0J         | 226                | 642                   | 650            | 300                     | 360 A A | TL    |
|            | 195/60R16 | 89H           | 6.0J         | 201                | 640                   | 580            | 300                     | 480 A A | TL    |
| 16"        | 205/60R16 | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 480 A A | TL    |
|            | 215/60R16 | 95H           | 6.5J         | 221                | 664                   | 690            | 300                     | 480 A A | TL    |
|            | 225/60R16 | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | 480 A A | TL    |
|            | 235/60R16 | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | 480 A A | TL    |
|            | 205/65R16 | 95H           | 6.0J         | 209                | 672                   | 690            | 300                     | 480 A A | TL    |

● Made in China





ZUPERACE Z-007 SUV



Benefits and Features

- 24 Soundbolt Arrays, and NVH simulation optimized pitch pattern make the silence performance toward the extreme
- Scaled grooves with beveled edges, the large continuous pattern block on tyre shoulder, the central continuous pattern rib with shallow groove, and together with the Non Petrochemical renewable green compound rubber, greatly improve the handling and grip performance
- BPOT Technology, Hybrid Silane and Mixing-Technology, together with ultra-fine particle size Nano-Silica with high density, provide tyres with better wear resistance and increased mileage while reducing fuel consumption

**Enhanced Grip**  
Hybrid Formula™ - Super hybrid rubber compound Fast water drainage and strong grip

**Improved Durability**  
BPOT Technology optimize the footprint and improve durability

**Minimized Noise**  
24 Soundbolt Arrays for minimized noise

Hybrid Formula  
( Enhanced Grip )

BPOT Technology  
( Improved Durability )

Soundbolt Array  
( Minimized Noise )

|              |         |
|--------------|---------|
| Rim Size     | 17 - 22 |
| Series       | 50 - 70 |
| Speed Rating | T - V   |

ZUPERACE Z-007 SUV

| Rim (inch)      | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max Load (kg) | Max Air Pressure (kPa) | UTQG    | TT/TL   | Rim (inch)      | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max Load (kg) | Max Air Pressure (kPa) | UTQG    | TT/TL   |         |
|-----------------|--------------|---------------|--------------|--------------------|-----------------------|---------------|------------------------|---------|---------|-----------------|--------------|---------------|--------------|--------------------|-----------------------|---------------|------------------------|---------|---------|---------|
| 17"             | 215/60R17    | 96V           | 6.5J         | 221                | 690                   | 710           | 300                    | 500 A A | TL      | 18"             | 265/60R18 XL | 114V          | 8.0J         | 272                | 775                   | 1180          | 350                    | 500 A A | TL      |         |
|                 | 225/60R17 XL | 103V          | 6.5J         | 228                | 702                   | 875           | 350                    | 500 A A | TL      |                 | 285/60R18    | 116V          | 8.5J         | 292                | 799                   | 1250          | 300                    | 500 A A | TL      |         |
|                 | 235/60R17    | 102V          | 7.0J         | 240                | 714                   | 850           | 300                    | 500 A A | TL      |                 | 235/65R18 EV | 106H          | 7.0J         | 240                | 763                   | 950           | 300                    | 500 A A | TL      |         |
|                 | 255/60R17 XL | 110V          | 7.5J         | 260                | 738                   | 1060          | 350                    | 500 A A | TL      |                 | 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180          | 300                    | 500 A A | TL      |         |
|                 | 215/65R17 EV | 99V           | 6.5J         | 221                | 712                   | 775           | 300                    | 500 A A | TL      |                 | 19"          | 265/50R19 XL  | 110V         | 8.5J               | 277                   | 749           | 1060                   | 350     | 500 A A | TL      |
|                 | 225/65R17 XL | 106V          | 6.5J         | 228                | 724                   | 950           | 350                    | 500 A A | TL      | 275/50R19 XL    |              | 112V          | 8.5J         | 284                | 759                   | 1120          | 350                    | 500 A A | TL      |         |
|                 | 235/65R17 XL | 108V          | 7.0J         | 240                | 738                   | 1000          | 350                    | 500 A A | TL      | 275/55R19       |              | 111V          | 8.5J         | 284                | 785                   | 1090          | 300                    | 500 A A | TL      |         |
|                 | 245/65R17    | 107H          | 7.0J         | 248                | 750                   | 975           | 300                    | 500 A A | TL      | 235/60R19 XL EV |              | 107V          | 7.0J         | 240                | 765                   | 975           | 350                    | 500 A A | TL      |         |
|                 | 265/65R17    | 112H          | 8.0J         | 272                | 776                   | 1120          | 300                    | 500 A A | TL      | 255/60R19 XL    |              | 113V          | 7.5J         | 260                | 789                   | 1150          | 350                    | 500 A A | TL      |         |
|                 | 18"          | 275/65R17     | 115H         | 8.0J               | 279                   | 790           | 1215                   | 300     | 500 A A | TL              | 235/65R19 XL | 109V          | 7.0J         | 240                | 789                   | 1030          | 350                    | 500 A A | TL      |         |
| 285/65R17       |              | 116H          | 8.5J         | 292                | 802                   | 1250          | 300                    | 500 A A | TL      | 20"             | 265/50R20 XL | 111V          | 8.5J         | 277                | 774                   | 1090          | 350                    | 500 A A | TL      |         |
| 215/70R17       |              | 101H          | 6.5J         | 221                | 734                   | 825           | 300                    | 500 A A | TL      |                 | 285/50R20    | 112V          | 9.0J         | 297                | 794                   | 1120          | 300                    | 500 A A | TL      |         |
| 225/60R18       |              | 100H          | 6.5J         | 228                | 727                   | 800           | 300                    | 500 A A | TL      |                 | 275/55R20 XL | 117V          | 8.5J         | 284                | 810                   | 1285          | 350                    | 500 A A | TL      |         |
| 235/60R18 XL EV |              | 107V          | 7.0J         | 240                | 739                   | 975           | 350                    | 500 A A | TL      |                 | 21"          | 275/50R21 XL  | 113V         | 8.5J               | 284                   | 809           | 1150                   | 350     | 500 A A | TL      |
| 245/60R18       |              | 105H          | 7.0J         | 248                | 751                   | 925           | 300                    | 500 A A | TL      |                 |              | 22"           | 275/50R22    | 111H               | 8.5J                  | 284           | 835                    | 1090    | 300     | 500 A A |
| 255/60R18 XL    |              | 112V          | 7.5J         | 260                | 763                   | 1120          | 350                    | 500 A A | TL      |                 |              |               |              |                    |                       |               |                        |         |         |         |

Made in China

EV Ready

⬮ Made in China ⬮ EV EV Ready






ZUPER TREK Z-203



Benefits and Features

- Optimized casing construction ensure a comfort ride
- Four straight tread grooves guarantee excellent water drainage
- Multi siping design provides outstanding traction on various road surface
- Improved footprint promises less fuel consumption and remarkable tyre life



|              |         |
|--------------|---------|
| Rim Size     | 16 - 22 |
| Series       | 35 - 70 |
| Speed Rating | H - Y   |

ZUPER TREK Z-203

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL | Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 16"        | 215/70R16    | 100H          | 6.5J         | 221                | 708                   | 800            | 300                     | 400 A A | TL    | 18"        | 235/65R18    | 106H          | 7.0J         | 240                | 763                   | 950            | 300                     | 400 A A | TL    |
|            | 225/70R16    | 103H          | 6.5J         | 228                | 722                   | 875            | 300                     | 400 A A | TL    |            | 265/65R18    | 114H          | 8.0J         | 272                | 801                   | 1180           | 300                     | 400 A A | TL    |
|            | 235/70R16    | 106H          | 7.0J         | 240                | 736                   | 950            | 300                     | 400 A A | TL    |            | 275/65R18    | 116H          | 8.0J         | 279                | 815                   | 1250           | 300                     | 400 A A | TL    |
|            | 245/70R16 XL | 111H          | 7.0J         | 248                | 750                   | 1090           | 350                     | 400 A A | TL    |            | 255/70R18    | 113H          | 7.5J         | 260                | 815                   | 1150           | 300                     | 400 A A | TL    |
|            | 265/70R16    | 112H          | 8.0J         | 272                | 778                   | 1120           | 300                     | 400 A A | TL    |            | 265/70R18    | 116H          | 8.0J         | 272                | 829                   | 1250           | 300                     | 400 A A | TL    |
|            | 275/70R16    | 114H          | 8.0J         | 279                | 792                   | 1180           | 300                     | 400 A A | TL    | 19"        | 255/50R19 XL | 107V          | 8.0J         | 265                | 739                   | 975            | 350                     | 400 A A | TL    |
| 17"        | 225/60R17    | 99H           | 6.5J         | 228                | 702                   | 775            | 300                     | 400 A A | TL    |            | 235/55R19 XL | 105V          | 7.5J         | 245                | 741                   | 925            | 350                     | 400 A A | TL    |
|            | 225/65R17    | 102H          | 6.5J         | 228                | 724                   | 850            | 300                     | 400 A A | TL    |            | 255/55R19 XL | 111V          | 8.0J         | 265                | 763                   | 1090           | 350                     | 400 A A | TL    |
|            | 235/65R17 XL | 108H          | 7.0J         | 240                | 738                   | 1000           | 350                     | 400 A A | TL    |            | 265/55R19    | 109V          | 8.5J         | 277                | 775                   | 1030           | 300                     | 400 A A | TL    |
|            | 245/65R17    | 107H          | 7.0J         | 248                | 750                   | 975            | 300                     | 400 A A | TL    | 20"        | 315/35R20 XL | 110Y          | 11.0J        | 320                | 728                   | 1060           | 350                     | 400 A A | TL    |
|            | 265/65R17    | 112H          | 8.0J         | 272                | 776                   | 1120           | 300                     | 400 A A | TL    |            | 275/40R20 XL | 106Y          | 9.5J         | 278                | 728                   | 950            | 350                     | 400 A A | TL    |
|            | 275/65R17    | 115H          | 8.0J         | 279                | 790                   | 1215           | 300                     | 400 A A | TL    |            | 255/50R20 XL | 109V          | 8.0J         | 265                | 764                   | 1030           | 350                     | 400 A A | TL    |
|            | 285/65R17    | 116H          | 8.5J         | 292                | 802                   | 1250           | 300                     | 400 A A | TL    |            | 265/50R20 XL | 111V          | 8.5J         | 277                | 774                   | 1090           | 350                     | 400 A A | TL    |
|            | 245/70R17    | 110H          | 7.0J         | 248                | 776                   | 1060           | 300                     | 400 A A | TL    |            | 285/50R20    | 112H          | 9.0J         | 297                | 794                   | 1120           | 300                     | 400 A A | TL    |
|            | 265/70R17    | 115H          | 8.0J         | 272                | 804                   | 1215           | 300                     | 400 A A | TL    |            | 255/55R20 XL | 110V          | 8.0J         | 265                | 788                   | 1060           | 350                     | 400 A A | TL    |
| 18"        | 235/50R18    | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | 400 A A | TL    |            | 265/55R20 XL | 113V          | 8.5J         | 277                | 800                   | 1150           | 350                     | 400 A A | TL    |
|            | 235/55R18    | 100H          | 7.5J         | 245                | 715                   | 800            | 300                     | 400 A A | TL    |            | 275/55R20 XL | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 400 A A | TL    |
|            | 225/60R18    | 100H          | 6.5J         | 228                | 727                   | 800            | 300                     | 400 A A | TL    |            | 275/60R20    | 115H          | 8.0J         | 279                | 838                   | 1215           | 300                     | 400 A A | TL    |
|            | 235/60R18    | 103H          | 7.0J         | 240                | 739                   | 875            | 300                     | 400 A A | TL    | 21"        | 275/50R21 XL | 113V          | 8.5J         | 284                | 809                   | 1150           | 350                     | 400 A A | TL    |
|            | 245/60R18    | 105H          | 7.0J         | 248                | 751                   | 925            | 300                     | 400 A A | TL    | 22"        | 275/40R22    | 107W          | 9.5J         | 278                | 779                   | 975            | 350                     | 400 A A | TL    |
|            | 255/60R18    | 112V          | 7.5J         | 260                | 763                   | 1120           | 350                     | 400 A A | TL    |            | 285/45R22    | 110H          | 9.5J         | 285                | 815                   | 1060           | 300                     | 400 A A | TL    |
|            | 265/60R18    | 110V          | 8.0J         | 272                | 775                   | 1060           | 300                     | 400 A A | TL    |            | 275/50R22    | 111H          | 8.5J         | 284                | 835                   | 1090           | 300                     | 400 A A | TL    |
|            | 285/60R18    | 116H          | 8.5J         | 292                | 799                   | 1250           | 300                     | 400 A A | TL    |            |              |               |              |                    |                       |                |                         |         |       |

● Made in China






CROSS LEGEND SU320



Benefits and Features

- High stiffness center rib provide precise steering
- Four straight main grooves efficiently resist hydroplaning & aquaplaning performance up
- Zig-Zag snow siping allows for improved all-season performance

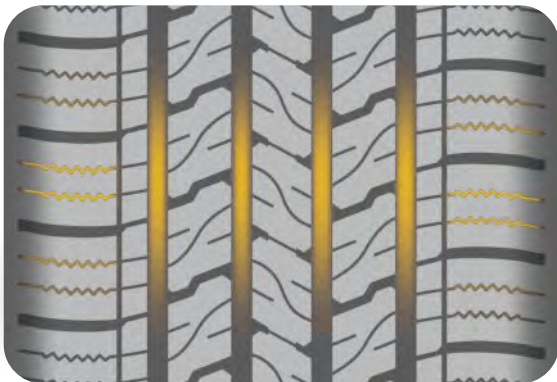

Comfortable

Silent

Braking

Efficiency

M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 24 |
| Series       | 35 - 75 |
| Speed Rating | T - V   |

CROSS LEGEND SU320

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL | Rim (inch)       | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|------------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 15"        | 225/70R15    | 100T          | 6.5J         | 228                | 697                   | 800            | 300                     | 500 A A | TL    | 18"              | 215/55R18    | 95V           | 7.0J         | 226                | 693                   | 690            | 300                     | 500 A A | TL    |
|            | 235/70R15    | 103T          | 7.0J         | 240                | 711                   | 875            | 300                     | 500 A A | TL    |                  | 225/55R18    | 98V           | 7.0J         | 233                | 705                   | 750            | 300                     | 500 A A | TL    |
|            | 265/70R15    | 112T          | 8.0J         | 272                | 753                   | 1120           | 300                     | 500 A A | TL    |                  | 235/55R18    | 100V          | 7.5J         | 245                | 715                   | 800            | 300                     | 500 A A | TL    |
|            | 215/75R15    | 100T          | 6.0J         | 216                | 703                   | 800            | 300                     | 500 A A | TL    |                  | 245/55R18    | 103V          | 7.5J         | 253                | 727                   | 875            | 300                     | 500 A A | TL    |
|            | 225/75R15    | 102T          | 6.0J         | 223                | 719                   | 850            | 300                     | 500 A A | TL    |                  | 255/55R18 XL | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | 500 A A | TL    |
|            | 235/75R15    | 105H          | 6.5J         | 235                | 733                   | 925            | 300                     | 500 A A | TL    |                  | 225/60R18    | 100H          | 6.5J         | 228                | 727                   | 800            | 300                     | 500 A A | TL    |
| 16"        | 265/75R15    | 112T          | 7.5J         | 267                | 779                   | 1120           | 300                     | 500 A A | TL    | 18"              | 235/60R18    | 103V          | 7.0J         | 240                | 739                   | 875            | 300                     | 500 A A | TL    |
|            | 255/65R16    | 109H          | 7.5J         | 260                | 738                   | 1030           | 300                     | 500 A A | TL    |                  | 245/60R18    | 105T          | 7.0J         | 248                | 751                   | 925            | 300                     | 500 A A | TL    |
|            | 205/70R16    | 97T           | 6.0J         | 209                | 704                   | 730            | 300                     | 500 A A | TL    |                  | 255/60R18 XL | 112V          | 7.5J         | 260                | 763                   | 1120           | 350                     | 500 A A | TL    |
|            | 215/70R16    | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | 500 A A | TL    |                  | 265/60R18 XL | 114V          | 8.0J         | 272                | 775                   | 1180           | 350                     | 500 A A | TL    |
|            | 225/70R16    | 103H          | 6.5J         | 228                | 722                   | 875            | 300                     | 500 A A | TL    |                  | 285/60R18    | 116H          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A | TL    |
|            | 235/70R16    | 106H          | 7.0J         | 240                | 736                   | 950            | 300                     | 500 A A | TL    |                  | 225/65R18    | 103H          | 6.5J         | 228                | 749                   | 875            | 300                     | 500 A A | TL    |
|            | 245/70R16    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A | TL    |                  | 235/65R18    | 106H          | 7.0J         | 240                | 763                   | 950            | 300                     | 500 A A | TL    |
|            | 255/70R16    | 111H          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A | TL    |                  | 255/65R18    | 111T          | 7.5J         | 260                | 789                   | 1090           | 300                     | 500 A A | TL    |
|            | 265/70R16    | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A | TL    |                  | 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A | TL    |
|            | 275/70R16    | 114T          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A | TL    |                  | 275/65R18    | 116T          | 8.0J         | 279                | 815                   | 1250           | 300                     | 500 A A | TL    |
|            | 225/75R16    | 104H          | 6.0J         | 223                | 744                   | 900            | 300                     | 500 A A | TL    |                  | 255/70R18    | 113T          | 7.5J         | 260                | 815                   | 1150           | 300                     | 500 A A | TL    |
|            | 235/75R16    | 108T          | 6.5J         | 235                | 758                   | 1000           | 300                     | 500 A A | TL    |                  | 265/70R18    | 116H          | 8.0J         | 272                | 829                   | 1250           | 300                     | 500 A A | TL    |
| 17"        | 245/75R16    | 111T          | 7.0J         | 248                | 774                   | 1080           | 300                     | 500 A A | TL    | 19"              | 275/45R19 XL | 108V          | 9.0J         | 273                | 731                   | 1000           | 350                     | 500 A A | TL    |
|            | 265/75R16    | 116T          | 7.5J         | 267                | 804                   | 1250           | 300                     | 500 A A | TL    |                  | 235/50R19    | 99V           | 7.5J         | 245                | 719                   | 775            | 300                     | 500 A A | TL    |
|            | 215/60R17    | 96H           | 6.5J         | 221                | 690                   | 710            | 300                     | 500 A A | TL    |                  | 255/50R19 XL | 107V          | 8.0J         | 265                | 739                   | 975            | 350                     | 500 A A | TL    |
|            | 225/60R17    | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | 500 A A | TL    |                  | 225/55R19    | 99V           | 7.0J         | 233                | 731                   | 775            | 300                     | 500 A A | TL    |
|            | 235/60R17    | 102T          | 7.0J         | 240                | 714                   | 850            | 300                     | 500 A A | TL    |                  | 245/55R19    | 103V          | 7.5J         | 253                | 753                   | 875            | 300                     | 500 A A | TL    |
|            | 255/60R17 XL | 110V          | 7.5J         | 260                | 738                   | 1060           | 350                     | 500 A A | TL    | 20"              | 255/55R19 XL | 111V          | 8.0J         | 265                | 763                   | 1090           | 350                     | 500 A A | TL    |
|            | 265/60R17    | 108T          | 8.0J         | 272                | 750                   | 1000           | 300                     | 500 A A | TL    |                  | 255/60R19    | 109H          | 7.5J         | 260                | 789                   | 1030           | 300                     | 500 A A | TL    |
|            | 275/60R17    | 110T          | 8.0J         | 279                | 762                   | 1060           | 300                     | 500 A A | TL    |                  | 255/40R20    | 101V          | 9.0J         | 260                | 712                   | 825            | 350                     | 500 A A | TL    |
|            | 215/65R17    | 99T           | 6.5J         | 221                | 712                   | 775            | 300                     | 500 A A | TL    |                  | 275/40R20 XL | 106V          | 9.5J         | 278                | 728                   | 950            | 350                     | 500 A A | TL    |
|            | 225/65R17    | 102H          | 6.5J         | 228                | 724                   | 850            | 300                     | 500 A A | TL    |                  | 275/45R20 XL | 110V          | 9.0J         | 273                | 756                   | 1060           | 350                     | 500 A A | TL    |
|            | 235/65R17    | 104H          | 7.0J         | 240                | 738                   | 900            | 300                     | 500 A A | TL    |                  | 245/50R20    | 102V          | 7.5J         | 253                | 754                   | 850            | 300                     | 500 A A | TL    |
| 18"        | 245/65R17    | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A | TL    |                  | 255/50R20 XL | 109V          | 8.0J         | 265                | 764                   | 1030           | 350                     | 500 A A | TL    |
|            | 255/65R17    | 110H          | 7.5J         | 260                | 764                   | 1060           | 300                     | 500 A A | TL    |                  | 265/50R20 XL | 111V          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A | TL    |
|            | 265/65R17    | 112H          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A | TL    |                  | 285/50R20 XL | 116H          | 9.0J         | 297                | 309                   | 1250           | 350                     | 500 A A | TL    |
|            | 275/65R17    | 115T          | 8.0J         | 279                | 790                   | 1215           | 300                     | 500 A A | TL    |                  | 235/55R20    | 102H          | 7.5J         | 245                | 766                   | 850            | 300                     | 500 A A | TL    |
|            | 285/65R17    | 116H          | 8.5J         | 292                | 802                   | 1250           | 300                     | 500 A A | TL    |                  | 255/55R20    | 107H          | 8.0J         | 265                | 788                   | 975            | 300                     | 500 A A | TL    |
|            | 235/70R17    | 109T          | 7.0J         | 240                | 762                   | 1030           | 300                     | 500 A A | TL    |                  | 275/55R20 XL | 117V          | 8.5J         | 284                | 810                   | 1285           | 350                     | 500 A A | TL    |
|            | 245/70R17    | 110T          | 7.0J         | 248                | 776                   | 1060           | 300                     | 500 A A | TL    | 22"              | 275/60R20    | 115H          | 8.0J         | 279                | 838                   | 1215           | 300                     | 500 A A | TL    |
|            | 255/70R17    | 112T          | 7.5J         | 260                | 790                   | 1120           | 300                     | 500 A A | TL    |                  | 305/40R22 XL | 114V          | 11.0J        | 313                | 803                   | 1060           | 350                     | 500 A A | TL    |
|            | 265/70R17    | 115H          | 8.0J         | 272                | 804                   | 1215           | 300                     | 500 A A | TL    |                  | 285/45R22    | 114H          | 9.5J         | 285                | 815                   | 1180           | 300                     | 500 A A | TL    |
|            | 255/75R17    | 115S          | 7.0J         | 255                | 814                   | 1215           | 300                     | 500 A A | TL    | 24"              | 305/45R22 XL | 118V          | 10.0J        | 303                | 833                   | 1320           | 350                     | 500 A A | TL    |
|            | 225/50R18    | 95V           | 7.0J         | 233                | 683                   | 690            | 300                     | 500 A A | TL    |                  | 305/35R24 XL | 112V          | 11.0J        | 313                | 814                   | 1120           | 350                     | 500 A A | TL    |
|            | 235/50R18    | 97V           | 7.5J         | 245                | 693                   | 730            | 300                     | 500 A A | TL    | Made in Thailand |              |               |              |                    |                       |                |                         |         |       |







SU318 H/T



Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively

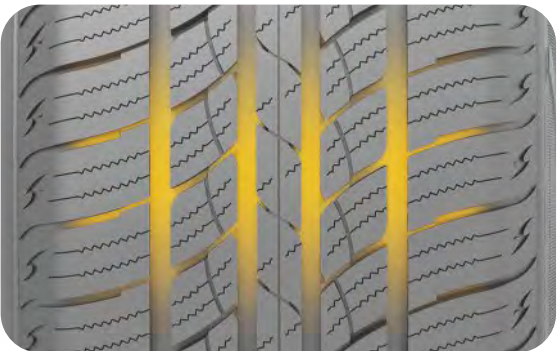

M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 22 |
| Series       | 35 - 75 |
| Speed Rating | T - V   |

SU318 H/T

| Rim (inch)                                                                                                                                                                            | Size                                                                                                                                                                                 | Service Index                                                                                   | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kpa) | Max. Air Pressure (kpa) | UTQG    | TT/TL                                                                                           | Rim (inch)                                                                                                                                                                           | Size                                                                                               | Service Index                                                                                      | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kpa) | Max. Air Pressure (kpa) | UTQG    | TT/TL   |    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------|--------------------|-----------------------|-----------------|-------------------------|---------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------|--------------------|-----------------------|-----------------|-------------------------|---------|---------|----|
| 15"                                                                                                                                                                                   |  225/70R15                                                                                        | 100T                                                                                            | 6.5J         | 228                | 697                   | 800             | 300                     | 500 A A | TL                                                                                              | 18"                                                                                                                                                                                  |  225/55R18      | 98V                                                                                                | 7.0J         | 233                | 705                   | 750             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  235/70R15                                                                                        | 103T                                                                                            | 7.0J         | 240                | 711                   | 875             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  235/55R18      | 100V                                                                                               | 7.5J         | 245                | 715                   | 800             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  265/70R15                                                                                        | 112T                                                                                            | 8.0J         | 272                | 753                   | 1120            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  255/55R18 XL   | 109V                                                                                               | 8.0J         | 265                | 737                   | 1030            | 350                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  215/75R15                                                                                        | 100T                                                                                            | 6.0J         | 216                | 703                   | 800             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  225/60R18      | 100H                                                                                               | 6.5J         | 228                | 727                   | 800             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  225/75R15                                                                                        | 102T                                                                                            | 6.0J         | 223                | 719                   | 850             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  235/60R18      | 103V                                                                                               | 7.0J         | 240                | 739                   | 875             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  235/75R15                                                                                        | 105T                                                                                            | 6.5J         | 235                | 733                   | 925             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  245/60R18      | 105T                                                                                               | 7.0J         | 248                | 751                   | 925             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  265/75R15                                                                                        | 112T                                                                                            | 7.5J         | 267                | 779                   | 1120            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  255/60R18 XL   | 112V                                                                                               | 7.5J         | 260                | 763                   | 1120            | 350                     | 500 A A | TL      |    |
| 16"                                                                                                                                                                                   |  215/65R16                                                                                        | 98H                                                                                             | 6.5J         | 221                | 686                   | 750             | 300                     | 450 A A | TL                                                                                              |  265/60R18 XL  | 114V                                                                                               | 8.0J                                                                                               | 272          | 775                | 1180                  | 350             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  255/65R16                                                                                        | 109T                                                                                            | 7.5J         | 260                | 738                   | 1030            | 300                     | 500 A A | TL                                                                                              |  285/60R18                                                                                        | 116H                                                                                               | 8.5J                                                                                               | 292          | 799                | 1250                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  215/70R16                                                                                        | 100T                                                                                            | 6.5J         | 221                | 708                   | 800             | 300                     | 500 A A | TL                                                                                              |  235/65R18                                                                                        | 106H                                                                                               | 7.0J                                                                                               | 240          | 763                | 950                   | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  225/70R16                                                                                        | 103T                                                                                            | 6.5J         | 228                | 722                   | 875             | 300                     | 500 A A | TL                                                                                              |  255/65R18                                                                                        | 111T                                                                                               | 6.5J                                                                                               | 228          | 749                | 1090                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  235/70R16                                                                                        | 106T                                                                                            | 7.0J         | 240                | 736                   | 950             | 300                     | 500 A A | TL                                                                                              |  265/65R18                                                                                        | 114T                                                                                               | 8.0J                                                                                               | 272          | 801                | 1180                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  245/70R16 XL  | 111T                                                                                            | 7.0J         | 248                | 750                   | 1090            | 350                     | 500 A A | TL                                                                                              |  275/65R18                                                                                        | 116T                                                                                               | 8.0J                                                                                               | 279          | 815                | 1250                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  255/70R16                                                                                        | 111T                                                                                            | 7.5J         | 260                | 764                   | 1090            | 300                     | 500 A A | TL                                                                                              |  255/70R18                                                                                        | 113T                                                                                               | 7.5J                                                                                               | 260          | 815                | 1150                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  265/70R16     | 112T                                                                                            | 8.0J         | 272                | 778                   | 1120            | 300                     | 500 A A | TL                                                                                              |  265/70R18                                                                                        | 116T                                                                                               | 8.0J                                                                                               | 272          | 829                | 1250                  | 300             | 500 A A                 | TL      |         |    |
|                                                                                                                                                                                       |  275/70R16                                                                                        | 114T                                                                                            | 8.0J         | 279                | 792                   | 1180            | 300                     | 500 A A | TL                                                                                              | 19"                                                                                                                                                                                  |  275/45R19 XL   | 108V                                                                                               | 9.0J         | 273                | 731                   | 1000            | 350                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  225/75R16                                                                                        | 104T                                                                                            | 6.0J         | 223                | 744                   | 900             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  235/50R19      | 99V                                                                                                | 7.5J         | 245                | 719                   | 775             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  235/75R16                                                                                        | 108T                                                                                            | 6.5J         | 235                | 758                   | 1000            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  255/50R19 XL   | 107V                                                                                               | 8.0J         | 265                | 739                   | 975             | 350                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  245/75R16                                                                                        | 111T                                                                                            | 7.0J         | 248                | 774                   | 1090            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  265/50R19 XL   | 110V                                                                                               | 8.5J         | 277                | 749                   | 1060            | 350                     | 500 A A | TL      |    |
|                                                                                                                                                                                       |  265/75R16                                                                                       | 116T                                                                                            | 7.5J         | 267                | 804                   | 1250            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  225/55R19     | 99V                                                                                                | 7.0J         | 233                | 731                   | 772             | 300                     | 500 A A | TL      |    |
|                                                                                                                                                                                       | 17"                                                                                                                                                                                  |  215/60R17 | 96H          | 6.5J               | 221                   | 690             | 710                     | 300     | 500 A A                                                                                         |                                                                                                                                                                                      | TL                                                                                                 |  235/55R19 XL | 105V         | 7.5J               | 245                   | 741             | 925                     | 350     | 500 A A | TL |
|                                                                                                                                                                                       |                                                                                                                                                                                      |  225/60R17 | 99T          | 6.5J               | 228                   | 702             | 775                     | 300     | 500 A A                                                                                         | TL                                                                                                                                                                                   |  245/55R19    | 103V                                                                                               | 7.5J         | 253                | 753                   | 875             | 300                     | 500 A A | TL      |    |
|  235/60R17                                                                                       |                                                                                                                                                                                      | 102T                                                                                            | 7.0J         | 240                | 714                   | 850             | 300                     | 500 A A | TL                                                                                              |  255/55R19 XL                                                                                   | 111V                                                                                               | 8.0J                                                                                               | 265          | 763                | 1090                  | 350             | 500 A A                 | TL      |         |    |
|  255/60R17 XL                                                                                    |                                                                                                                                                                                      | 110V                                                                                            | 7.5J         | 260                | 738                   | 1060            | 350                     | 500 A A | TL                                                                                              |  255/60R19                                                                                      | 109H                                                                                               | 7.5J                                                                                               | 260          | 789                | 1030                  | 300             | 500 A A                 | TL      |         |    |
|  265/60R17                                                                                       |                                                                                                                                                                                      | 108T                                                                                            | 8.0J         | 272                | 750                   | 1000            | 300                     | 500 A A | TL                                                                                              |  255/65R19 XL                                                                                   | 114V                                                                                               | 7.5J                                                                                               | 260          | 815                | 1180                  | 350             | 500 A A                 | TL      |         |    |
|  275/60R17                                                                                       |                                                                                                                                                                                      | 110T                                                                                            | 8.0J         | 279                | 762                   | 1060            | 300                     | 500 A A | TL                                                                                              | 20"                                                                                                                                                                                  |  315/35R20    | 106H                                                                                               | 11.0J        | 320                | 728                   | 950             | 300                     | 500 A A | TL      |    |
|  215/65R17                                                                                       |                                                                                                                                                                                      | 99T                                                                                             | 6.5J         | 221                | 712                   | 775             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  315/35R20 XL | 110V                                                                                               | 11.0J        | 320                | 728                   | 1060            | 350                     | 500 A A | TL      |    |
|  225/65R17                                                                                       |                                                                                                                                                                                      | 102T                                                                                            | 6.5J         | 228                | 724                   | 850             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  275/40R20 XL | 106V                                                                                               | 9.5J         | 278                | 728                   | 950             | 350                     | 500 A A | TL      |    |
|  235/65R17                                                                                       |                                                                                                                                                                                      | 104T                                                                                            | 7.0J         | 240                | 738                   | 900             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  275/45R20 XL | 110V                                                                                               | 9.0J         | 273                | 756                   | 1060            | 350                     | 500 A A | TL      |    |
|  245/65R17                                                                                       |                                                                                                                                                                                      | 107T                                                                                            | 7.0J         | 248                | 750                   | 975             | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  245/50R20    | 102V                                                                                               | 7.5J         | 253                | 754                   | 850             | 300                     | 500 A A | TL      |    |
|  255/65R17                                                                                       |                                                                                                                                                                                      | 110H                                                                                            | 7.5J         | 260                | 764                   | 1060            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  255/50R20 XL | 109V                                                                                               | 8.0J         | 265                | 764                   | 1030            | 350                     | 500 A A | TL      |    |
|  265/65R17  |                                                                                                                                                                                      | 112T                                                                                            | 8.0J         | 272                | 776                   | 1120            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  285/50R20 XL | 116V                                                                                               | 9.0J         | 297                | 794                   | 1250            | 350                     | 500 A A | TL      |    |
|  275/65R17                                                                                       |                                                                                                                                                                                      | 115T                                                                                            | 8.0J         | 279                | 790                   | 1215            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  235/55R20    | 102H                                                                                               | 7.5J         | 245                | 766                   | 850             | 300                     | 500 A A | TL      |    |
|  285/65R17                                                                                       |                                                                                                                                                                                      | 116H                                                                                            | 8.5J         | 292                | 802                   | 1250            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  255/55R20    | 107H                                                                                               | 8.0J         | 265                | 764                   | 1030            | 350                     | 500 A A | TL      |    |
|  245/70R17                                                                                       |                                                                                                                                                                                      | 110T                                                                                            | 7.0J         | 248                | 776                   | 1060            | 300                     | 500 A A | TL                                                                                              |                                                                                                                                                                                      |  275/55R20 XL | 117V                                                                                               | 8.5J         | 284                | 810                   | 1285            | 350                     | 500 A A | TL      |    |
|  255/70R17                                                                                       | 112T                                                                                                                                                                                 | 7.5J                                                                                            | 260          | 790                | 1120                  | 300             | 500 A A                 | TL      |  255/60R20 | 113V                                                                                                                                                                                 | 7.5J                                                                                               | 260                                                                                                | 814          | 1150               | 350                   | 500 A A         | TL                      |         |         |    |
|  265/70R17                                                                                       | 115T                                                                                                                                                                                 | 8.0J                                                                                            | 272          | 804                | 1215                  | 300             | 500 A A                 | TL      |  275/60R20 | 115H                                                                                                                                                                                 | 8.0J                                                                                               | 279                                                                                                | 838          | 1215               | 300                   | 500 A A         | TL                      |         |         |    |
| 18"                                                                                                                                                                                   |  235/50R18                                                                                      | 97V                                                                                             | 7.5J         | 245                | 693                   | 730             | 300                     | 500 A A | TL                                                                                              | 22"                                                                                                                                                                                  |  285/45R22    | 114H                                                                                               | 9.5J         | 285                | 815                   | 1180            | 350                     | 500 A A | TL      |    |

● Made in China ● Made in Thailand OWL Outline White Letters (OWL)





SL369 A/T



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions



M+S

|              |         |
|--------------|---------|
| Rim Size     | 14 - 20 |
| Series       | 45 - 85 |
| Speed Rating | Q - V   |

SL369 A/T

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 14"        | 175/70R14    | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | 440 A A | TL    |
|            | 175/80R14    | 88T           | 5.0J         | 177                | 636                   | 560            | 300                     | 440 A A | TL    |
|            | P215/75R14   | 100T          | 6.0J         | 216                | 678                   | 800            | 300                     | 500 A A | TL    |
| 15"        | 205/65R15    | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | 500 A A | TL    |
|            | 205/70R15    | 96H           | 6.0J         | 209                | 669                   | 710            | 300                     | 500 A A | TL    |
|            | 225/70R15    | 100T          | 6.5J         | 228                | 697                   | 800            | 300                     | 500 A A | TL    |
|            | 235/70R15    | 103S          | 7.0J         | 240                | 711                   | 875            | 300                     | 500 A A | TL    |
|            | 265/70R15    | 112T          | 8.0J         | 272                | 753                   | 1120           | 300                     | 500 A A | TL    |
|            | P215/75R15   | 100S          | 6.0J         | 216                | 703                   | 800            | 300                     | 500 A A | TL    |
|            | 235/75R15 XL | 109S          | 6.5J         | 235                | 733                   | 1030           | 350                     | 500 A A | TL    |
|            | 245/75R15    | 108T          | 7.0J         | 248                | 749                   | 1000           | 300                     | 500 A A | TL    |
| 16"        | 205/60R16    | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | 500 A A | TL    |
|            | 235/60R16    | 100T          | 7.0J         | 240                | 688                   | 800            | 300                     | 500 A A | TL    |
|            | 215/70R16    | 100S          | 6.5J         | 221                | 708                   | 800            | 300                     | 500 A A | TL    |
|            | 225/70R16    | 103S          | 6.5J         | 228                | 722                   | 875            | 300                     | 500 A A | TL    |
|            | 235/70R16    | 106S          | 7.0J         | 240                | 736                   | 950            | 300                     | 500 A A | TL    |
|            | 245/70R16 XL | 111S          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A | TL    |
|            | 255/70R16    | 111T          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A | TL    |
|            | 265/70R16    | 112S          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A | TL    |
|            | 275/70R16    | 114S          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A | TL    |
|            | 225/75R16 XL | 108S          | 6.0J         | 223                | 744                   | 1000           | 350                     | 500 A A | TL    |
|            | 235/75R16 XL | 112S          | 6.5J         | 235                | 758                   | 1120           | 350                     | 500 A A | TL    |
|            | 245/75R16    | 111S          | 7.0J         | 248                | 774                   | 1090           | 300                     | 500 A A | TL    |
|            | 265/75R16    | 116S          | 7.5J         | 267                | 804                   | 1250           | 300                     | 500 A A | TL    |
|            | 205/80R16 XL | 104S          | 5.5J         | 203                | 734                   | 900            | 350                     | 440 A A | TL    |
|            | 215/80R16 XL | 107S          | 6.0J         | 216                | 750                   | 975            | 350                     | 440 A A | TL    |
| 17"        | 225/65R17    | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | 500 A A | TL    |
|            | 235/65R17    | 104S          | 7.0J         | 240                | 738                   | 900            | 300                     | 500 A A | TL    |
|            | 245/65R17    | 107S          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A | TL    |
|            | 255/65R17    | 110T          | 7.5J         | 260                | 764                   | 1060           | 300                     | 500 A A | TL    |
|            | 265/65R17    | 112S          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A | TL    |
|            | 225/70R17 XL | 108S          | 6.5J         | 228                | 748                   | 1000           | 350                     | 500 A A | TL    |
|            | 245/70R17    | 110T          | 7.0J         | 248                | 776                   | 1000           | 300                     | 500 A A | TL    |
|            | 255/70R17    | 112T          | 7.5J         | 260                | 790                   | 1120           | 300                     | 500 A A | TL    |
|            | 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | 500 A A | TL    |
|            | 285/70R17    | 117T          | 8.5J         | 292                | 832                   | 1285           | 300                     | 500 A A | TL    |
|            | 235/75R17    | 109T          | 6.5J         | 235                | 784                   | 1030           | 300                     | 500 A A | TL    |
|            | 245/75R17    | 112T          | 7.0J         | 248                | 800                   | 1120           | 300                     | 500 A A | TL    |
|            | 255/75R17    | 115T          | 7.0J         | 255                | 814                   | 1215           | 300                     | 500 A A | TL    |
| 18"        | 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A | TL    |
|            | 285/60R18    | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A | TL    |
|            | 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A | TL    |
|            | 275/65R18    | 116T          | 8.0J         | 279                | 815                   | 1250           | 300                     | 500 A A | TL    |
| 20"        | 275/45R20 XL | 110H          | 9.0J         | 273                | 756                   | 1060           | 350                     | 500 A A | TL    |
|            | 265/50R20 XL | 111T          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A | TL    |
|            | 285/50R20 XL | 116V          | 9.0J         | 297                | 794                   | 1250           | 350                     | 500 A A | TL    |
|            | 275/55R20    | 113S          | 8.5J         | 284                | 810                   | 1150           | 300                     | 500 A A | TL    |
|            | 275/60R20    | 115T          | 8.0J         | 279                | 838                   | 1215           | 300                     | 500 A A | TL    |

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 30×9.5R15LT   | C/6PR  | 104Q          | 7.5J         | 240                | 750                   | 900            | 350                     | TL    |
|            | 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
|            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
|            | LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 235                | 733                   | 1060/975       | 450                     | TL    |
|            | LT235/75R15   | E/10PR | 116/113Q      | 6.5J         | 235                | 733                   | 1250/1150      | 550                     | TL    |
| 16"        | LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL    |
|            | LT265/70R16   | E/10PR | 121/118Q      | 8.0J         | 272                | 778                   | 1450/1320      | 550                     | TL    |
|            | LT305/70R16   | E/10PR | 124/121R      | 9.0J         | 311                | 834                   | 1600/1450      | 450                     | TL    |
|            | LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
|            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    |
|            | LT285/75R16   | D/8PR  | 122/119Q      | 8.0J         | 286                | 834                   | 1500/1360      | 450                     | TL    |
|            | LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 834                   | 1700/1550      | 550                     | TL    |
|            | LT315/75R16   | E/10PR | 127/124R      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |
|            | LT205/80R16   | D/8PR  | 110/108S      | 5.5J         | 203                | 734                   | 1060/1000      | 450                     | TL    |
|            | LT215/85R16   | E/10PR | 115/112Q      | 6.0J         | 216                | 772                   | 1215/1120      | 550                     | TL    |
|            | LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
| 17"        | 35×12.50R17LT | E/10PR | 121Q          | 10.0J        | 318                | 877                   | 1450           | 450                     | TL    |
|            | LT265/65R17   | E/10PR | 120/117S      | 8.0J         | 272                | 775                   | 1400/1285      | 550                     | TL    |
|            | LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
|            | LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
|            | LT285/70R17   | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL    |
|            | LT285/70R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL    |
|            | LT315/70R17   | E/10PR | 121/118R      | 9.5J         | 323                | 874                   | 1450/1320      | 450                     | TL    |
|            | LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
|            | LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
| 18"        | LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |
|            | LT285/65R18   | E/10PR | 125/122R      | 8.5J         | 292                | 827                   | 1650/1500      | 550                     | TL    |
|            | LT265/70R18   | E/10PR | 124/121R      | 8.0J         | 272                | 829                   | 1600/1450      | 550                     | TL    |
|            | LT275/70R18   | E/10PR | 125/122S      | 8.0J         | 279                | 843                   | 1650/1500      | 550                     | TL    |
| 20"        | LT285/55R20   | E/10PR | 122/119R      | 9.0J         | 297                | 822                   | 1500/1360      | 550                     | TL    |
|            | LT305/55R20   | E/10PR | 121/118R      | 9.5J         | 316                | 844                   | 1450/1320      | 450                     | TL    |
|            | LT275/65R20   | E/10PR | 126/123S      | 8.0J         | 279                | 866                   | 1700/1550      | 550                     | TL    |

● Made in China    ● Made in Thailand    OWL Outline White Letters (OWL)






TERRA LEGEND SL399



Benefits and Features

- Wider tread design and new compound help longer tread life On & Off road
- Side-Biter lugs in the sidewall improve traction in mud and rough road
- Aggressive sidewall design provide increased traction, especially in aired-down driving situations

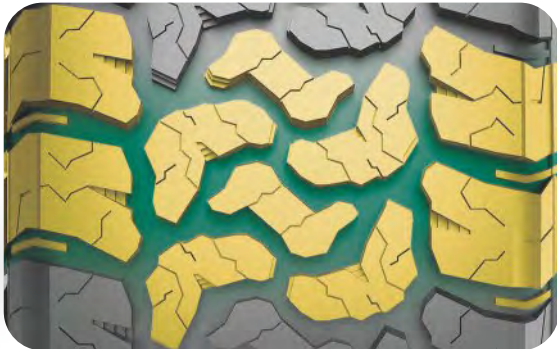

M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 20 |
| Series       | 50 - 75 |
| Speed Rating | Q - V   |

TERRA LEGEND SL399

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL | Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 235/75R15 XL | 109S          | 6.5J         | 235                | 733                   | 1030           | 350                     | 500 A A | TL    | 15"        | 31x10.50R15LT | C/6PR  | 109S          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
| 16"        | 215/70R16    | 100S          | 6.5J         | 221                | 708                   | 800            | 300                     | 500 A A | TL    | 16"        | 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
|            | 235/70R16    | 106S          | 7.0J         | 240                | 736                   | 950            | 300                     | 500 A A | TL    |            | LT215/75R15   | D/8PR  | 106/103Q      | 6.0J         | 216                | 703                   | 950/875        | 450                     | TL    |
|            | 245/70R16 XL | 111S          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A | TL    |            | LT235/75R15   | C/6PR  | 104/101R      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
|            | 255/70R16    | 111T          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A | TL    |            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
|            | 265/70R16    | 112S          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A | TL    | 16"        | LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL    |
|            | 275/70R16    | 114S          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A | TL    |            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
| 17"        | 245/65R17    | 107S          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A | TL    |            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    |
|            | 265/65R17    | 112S          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A | TL    |            | LT265/75R16   | D/8PR  | 121/118Q      | 7.5J         | 267                | 804                   | 1450/1320      | 450                     | TL    |
|            | 265/70R17    | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | 500 A A | TL    | 17"        | LT265/65R17   | E/10PR | 120/117Q      | 8.0J         | 272                | 776                   | 1400/1285      | 550                     | TL    |
| 18"        | 235/60R18    | 103T          | 7.0J         | 240                | 739                   | 875            | 300                     | 500 A A | TL    |            | LT285/65R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 802                   | 1450/1320      | 550                     | TL    |
|            | 255/60R18 XL | 112T          | 7.5J         | 260                | 763                   | 1120           | 350                     | 500 A A | TL    |            | LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
|            | 255/60R18 XL | 112V          | 7.5J         | 260                | 763                   | 1120           | 350                     | 500 A A | TL    |            | LT265/70R17   | E/10PR | 123/120Q      | 8.0J         | 272                | 804                   | 1550/1400      | 550                     | TL    |
|            | 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A | TL    |            | LT265/70R17   | D/8PR  | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 450                     | TL    |
|            | 285/60R18    | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A | TL    |            | LT285/70R17   | E/10PR | 126/123Q      | 8.5J         | 292                | 832                   | 1700/1550      | 550                     | TL    |
|            | 235/65R18    | 106T          | 7.0J         | 240                | 763                   | 950            | 300                     | 500 A A | TL    |            | LT285/70R17   | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL    |
|            | 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A | TL    |            | LT315/70R17   | E/10PR | 126/123Q      | 9.5J         | 323                | 874                   | 1700/1550      | 450                     | TL    |
| 19"        | 245/55R19    | 103T          | 7.5J         | 253                | 753                   | 875            | 300                     | 500 A A | TL    | 18"        | LT265/70R18   | E/10PR | 124/121R      | 8.0J         | 272                | 829                   | 1600/1450      | 550                     | TL    |
| 20"        | 265/50R20 XL | 111T          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A | TL    | 20"        | LT285/50R20   | E/10PR | 119/116Q      | 9.0J         | 297                | 794                   | 1360/1250      | 550                     | TL    |
|            | 275/55R20 XL | 117T          | 8.5J         | 284                | 810                   | 1285           | 350                     | 500 A A | TL    |            |               |        |               |              |                    |                       |                |                         |       |

● Made in China ● Made in Thailand





RUGGED LEGEND SL339



Benefits and Features

- Optimized tread design with wide tread large block and variable pitch pattern
- Two-wide circumferential zigzag grooves and Center cross pattern grooves with stone ejectors Provide superb off-road traction throughout the tyre's wear life with stone ejectors to help prevent stone drilling
- Aggressive sidewall design offer customization with a distinct look on each side of the tyre
- Open shoulder design and wide lateral grooves ensure excellent driving performance of the tyre



M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 20 |
| Series       | 50 - 85 |
| Speed Rating | Q - T   |

RUGGED LEGEND SL339

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL | Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 235/75R15    | 109S          | 6.5J         | 235                | 733                   | 1030           | 350                     | 500 A A | TL    | 15"        | LT215/75R15   | D/8PR  | 106/103Q      | 6.0J         | 223                | 719                   | 950/875        | 450                     | TL    |
| 16"        | 245/70R16 XL | 111S          | 7.0J         | 248                | 750                   | 1090           | 350                     | 500 A A | TL    | 16"        | LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 733                | 739                   | 1060/975       | 450                     | TL    |
|            | 255/70R16    | 111T          | 7.5J         | 260                | 764                   | 1090           | 300                     | 500 A A | TL    |            | 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
|            | 265/70R16    | 112S          | 8.0J         | 272                | 778                   | 1120           | 300                     | 500 A A | TL    |            | 33x12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 826                   | 1000           | 250                     | TL    |
|            | 275/70R16    | 114S          | 8.0J         | 279                | 792                   | 1180           | 300                     | 500 A A | TL    | 16"        | LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL    |
| 17"        | 245/65R17    | 107S          | 7.0J         | 248                | 750                   | 975            | 300                     | 500 A A | TL    |            | LT265/70R16   | E/10PR | 121/118Q      | 8.0J         | 272                | 778                   | 1450/1320      | 550                     | TL    |
|            | 265/65R17    | 112S          | 8.0J         | 272                | 776                   | 1120           | 300                     | 500 A A | TL    |            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
| 18"        | 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A | TL    |            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 450                     | TL    |
|            | 285/60R18    | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A | TL    |            | LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 834                   | 1700/1550      | 550                     | TL    |
|            | 265/65R18    | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | 500 A A | TL    |            | LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
| 20"        | 265/50R20 XL | 111T          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A | TL    | 17"        | LT265/65R17   | E/10PR | 120/117Q      | 8.0J         | 272                | 776                   | 1400/1285      | 550                     | TL    |
|            | 275/55R20 XL | 117T          | 8.5J         | 284                | 810                   | 1285           | 350                     | 500 A A | TL    |            | LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
|            |              |               |              |                    |                       |                |                         |         |       |            | LT265/70R17   | E/10PR | 123/120Q      | 8.0J         | 272                | 804                   | 1550/1400      | 550                     | TL    |
|            |              |               |              |                    |                       |                |                         |         |       |            | LT285/70R17   | E/10PR | 126/123Q      | 8.5J         | 292                | 832                   | 1700/1550      | 550                     | TL    |
|            |              |               |              |                    |                       |                |                         |         |       |            | LT285/65R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 802                   | 1450/1320      | 550                     | TL    |

Made in China





MUD LEGEND SL366



Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand



M+S

|              |         |
|--------------|---------|
| Rim Size     | 14 - 20 |
| Series       | 50 - 85 |
| Speed Rating | Q - T   |

MUD LEGEND SL366

| Rim (inch) | Size         | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | UTQG    | TT/TL |
|------------|--------------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|---------|-------|
| 18"        | 265/60R18    | 110T          | 8.0J         | 272                | 775                   | 1060           | 300                     | 500 A A | TL    |
|            | 285/60R18    | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | 500 A A | TL    |
| 20"        | 265/50R20 XL | 111T          | 8.5J         | 277                | 774                   | 1090           | 350                     | 500 A A | TL    |
|            | 275/55R20    | 113S          | 8.5J         | 284                | 810                   | 1150           | 300                     | 500 A A | TL    |

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 14"        | 185R14C       | D/8PR  | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
|            | 195R14C       | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
| 15"        | 205/70R15C    | C/6PR  | 104/102Q      | 6.0J         | 209                | 669                   | 900/850        | 375                     | TL    |
|            | 30x9.50R15LT  | C/6PR  | 104Q          | 7.5J         | 240                | 756                   | 900            | 350                     | TL    |
|            | 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    |
|            | 32x11.50R15LT | C/6PR  | 113Q          | 9.0J         | 290                | 807                   | 1150           | 350                     | TL    |
|            | 33x12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    |
|            | 35x12.50R15LT | C/6PR  | 113Q          | 10.0J        | 318                | 883                   | 1150           | 250                     | TL    |
|            | LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |
|            | LT225/75R15   | C/6PR  | 102/99Q       | 6.0J         | 223                | 719                   | 850/775        | 350                     | TL    |
|            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 739                   | 900/825        | 350                     | TL    |
|            | LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 235                | 739                   | 1060/975       | 450                     | TL    |
| 16"        | 205R16C       | D/8PR  | 110/108Q      | 6.0J         | 208                | 736                   | 1060/1000      | 450                     | TL    |
|            | LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 750                   | 1215/1120      | 550                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 780                   | 1380/1260      | 550                     | TL    |
|            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |
|            | LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    |
|            | LT315/75R16   | E/10PR | 127/124R      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |
|            | LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 812                   | 1380/1260      | 550                     | TL    |
| 17"        | 35x12.50R17LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
|            | 37x12.50R17LT | D/8PR  | 124Q          | 10.0J        | 318                | 934                   | 1600           | 350                     | TL    |
|            | LT265/65R17   | E/10PR | 120/117Q      | 8.0J         | 272                | 775                   | 14000/1285     | 550                     | TL    |
|            | LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 782                   | 1360/1250      | 550                     | TL    |
|            | LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 810                   | 1450/1320      | 550                     | TL    |
|            | LT285/70R17   | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL    |
|            | LT315/70R17   | E/10PR | 121/118Q      | 9.5J         | 323                | 880                   | 1450/1320      | 450                     | TL    |
| 18"        | 35x12.50R18LT | E/10PR | 123Q          | 10.0J        | 318                | 883                   | 1550           | 450                     | TL    |
| 20"        | 33x12.50R20LT | E/10PR | 114Q          | 10.0J        | 318                | 832                   | 1180           | 450                     | TL    |
|            | 35x12.50R20LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |

Made in China






MUD LEGEND SL376



Benefits and Features

- New generation premium tyres designed for unpaved tough road (professional off-road tyre)
- Aggressive and open shoulder design provides extreme grips for various terrains
- Stone rejectors protect the tyre casing and minimize stone drilling for long-lasting off-road experience



|              |         |
|--------------|---------|
| Rim Size     | 15 - 26 |
| Series       | 55 - 85 |
| Speed Rating | Q - R   |

MUD LEGEND SL376

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 30×9.50R15LT  | C/6PR  | 104Q          | 7.5J         | 240                | 756                   | 900            | 350                     | TL    | 17"        | LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 806                   | 1450/1320      | 550                     | TL    |
|            | 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    |            | LT255/75R17   | C/6PR  | 111/108Q      | 7.0J         | 255                | 820                   | 1000/1090      | 350                     | TL    |
|            | 32×11.50R15LT | C/6PR  | 113Q          | 9.0J         | 290                | 807                   | 1150           | 350                     | TL    |            | LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 814                   | 1285/1400      | 550                     | TL    |
|            | 33×12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    |            | 35×12.50R18LT | E/10PR | 123Q          | 10.0J        | 318                | 883                   | 1550           | 450                     | TL    |
|            | 35×12.50R15LT | C/6PR  | 113Q          | 10.0J        | 318                | 883                   | 1150           | 250                     | TL    |            | LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 821                   | 1400/1550      | 550                     | TL    |
| 16"        | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 739                   | 900/825        | 350                     | TL    | 18"        | LT275/70R18   | E/10PR | 125/122Q      | 8.0J         | 279                | 849                   | 1500/1650      | 550                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 780                   | 1380/1260      | 550                     | TL    |            | 35×12.50R20LT | E/10PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 450                     | TL    |
|            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |            | LT305/55R20   | F/12PR | 125/122Q      | 9.5J         | 316                | 850                   | 1500/1650      | 550                     | TL    |
|            | LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    |            | LT275/65R20   | E/10PR | 126/123Q      | 8.0J         | 279                | 872                   | 1550/1700      | 550                     | TL    |
|            | LT315/75R16   | E/10PR | 127/124R      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |            | 35×12.50R22LT | F/12PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 550                     | TL    |
| 17"        | LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 812                   | 1380/1260      | 550                     | TL    | 20"        | 37×13.50R22LT | F/12PR | 128Q          | 11.0J        | 345                | 934                   | 1800           | 550                     | TL    |
|            | 35×12.50R17LT | E/10PR | 125Q          | 10.0J        | 318                | 883                   | 1650           | 450                     | TL    |            | 40×15.50R24LT | F/12PR | 128Q          | 12.5J        | 395                | 1010                  | 1800           | 550                     | TL    |
|            | LT265/70R17   | E/10PR | 123/120Q      | 8.0J         | 272                | 810                   | 1550/1400      | 550                     | TL    |            | 40×15.50R26LT | E/10PR | 126Q          | 12.5J        | 395                | 1010                  | 1700           | 450                     | TL    |
|            | LT285/70R17   | E/10PR | 126/123Q      | 8.5J         | 292                | 832                   | 1700/1550      | 550                     | TL    |            |               |        |               |              |                    |                       |                |                         |       |
|            |               |        |               |              |                    |                       |                |                         |       |            |               |        |               |              |                    |                       |                |                         |       |

Made in Thailand





MUD LEGEND SL378



Benefits and Features

- The aggressive tread design is engineered to provide strong biting edges
- The staggered, off-center tread blocks provide increased traction while enhancing road performance
- Built to handle rugged terrains anywhere and to take you on extreme adventures
- Robust shoulder design helps to minimizing cuts



M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 18 |
| Series       | 60 - 85 |
| Speed Rating | Q       |

MUD LEGEND SL378

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 31x10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    | 16"        | LT265/75R16 | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |
|            | 33x12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    |            | LT285/75R16 | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    |
|            | LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |            | LT235/85R16 | E/10PR | 120/116Q      | 6.5J         | 235                | 812                   | 1380/1260      | 550                     | TL    |
|            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 739                   | 900/825        | 350                     | TL    | 17"        | LT265/65R17 | E/10PR | 120/117Q      | 8.0J         | 272                | 775                   | 1400/1285      | 550                     | TL    |
| 16"        | LT235/75R15   | D/8PR  | 110/107Q      | 6.5J         | 235                | 739                   | 1060/975       | 450                     | TL    |            | LT245/70R17 | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
|            | LT245/70R16   | E/10PR | 118/115Q      | 7.0J         | 248                | 750                   | 1320/1215      | 550                     | TL    |            | LT265/70R17 | E/10PR | 121/118Q      | 8.0J         | 272                | 810                   | 1450/1320      | 550                     | TL    |
|            | LT265/70R16   | E/10PR | 121/118Q      | 8.0J         | 272                | 784                   | 1450/1320      | 550                     | TL    |            | LT285/70R17 | E/10PR | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 550                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 780                   | 1380/1260      | 550                     | TL    | 18"        | LT265/60R18 | E/10PR | 119/116Q      | 8.0J         | 272                | 775                   | 1360/1250      | 550                     | TL    |

Made in China





MUD LEGEND SL386



Benefits and Features

- Premium tyres designed for unpaved tough road (Professional Off-Road tyres)
- 3-Plies (available for selected sizes) tyre carcass guarantees outstanding performance on any tough road conditions, especially mud and sand surface
- Robust tread blocks promise excellent traction on unpaved roads



M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 26 |
| Series       | 65 - 80 |
| Speed Rating | Q       |

MUD LEGEND SL386

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 781                   | 1030           | 350                     | TL    | 17"        | LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
|            | 33×12.50R15LT | C/6PR  | 108Q          | 10.0J        | 318                | 832                   | 1000           | 250                     | TL    | 18"        | 35×12.50R18LT | F/12PR | 128Q          | 10.0J        | 318                | 883                   | 1800           | 550                     | TL    |
| 16"        | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 810                   | 1550/1400      | 550                     | TL    |            | LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |
|            | LT285/75R16   | E/10PR | 126/123Q      | 8.0J         | 286                | 840                   | 1700/1550      | 550                     | TL    | 20"        | 33×12.50R20LT | F/12PR | 119Q          | 10.0J        | 318                | 832                   | 1360           | 550                     | TL    |
|            | LT315/75R16   | E/10PR | 127/124Q      | 8.5J         | 313                | 878                   | 1750/1600      | 450                     | TL    |            | 35×12.50R20LT | F/12PR | 125Q          | 10.0J        | 318                | 883                   | 1650           | 550                     | TL    |
| 17"        | 35×12.50R17LT | F/12PR | 128Q          | 10.0J        | 318                | 883                   | 1800           | 550                     | TL    |            | 37×12.50R20LT | F/12PR | 128Q          | 10.0J        | 318                | 934                   | 1800           | 550                     | TL    |
|            | 37×12.50R17LT | F/12PR | 128Q          | 10.0J        | 318                | 934                   | 1800           | 550                     | TL    |            | 37×13.50R20LT | F/12PR | 128Q          | 11.0J        | 345                | 934                   | 1800           | 550                     | TL    |
|            | LT305/65R17   | E/10PR | 121/118Q      | 9.0J         | 311                | 828                   | 1450/1320      | 450                     | TL    | 22"        | 35×12.50R22LT | F/12PR | 121Q          | 10.0J        | 318                | 883                   | 1450           | 550                     | TL    |
|            | LT265/70R17   | E/10PR | 123/120Q      | 8.0J         | 272                | 804                   | 1550/1400      | 550                     | TL    |            | 37×13.50R22LT | F/12PR | 128Q          | 11.0J        | 345                | 934                   | 1800           | 550                     | TL    |
|            | LT285/70R17   | E/10PR | 126/123Q      | 8.5J         | 292                | 832                   | 1700/1550      | 550                     | TL    | 24"        | 40×15.50R24LT | E/10PR | 128Q          | 12.5J        | 395                | 1010                  | 1800           | 450                     | TL    |
|            | LT315/70R17   | F/12PR | 128/125Q      | 9.5J         | 323                | 874                   | 1800/1650      | 550                     | TL    | 26"        | 40×15.50R26LT | E/10PR | 126Q          | 12.5J        | 395                | 1010                  | 1700           | 450                     | TL    |
|            | LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |            |               |        |               |              |                    |                       |                |                         |       |

🇨🇳 Made in China 🇹🇭 Made in Thailand





TRAC LEGEND SL315



Benefits and Features

- 4 Zig-zag grooves and the snow sipes improves all-season performance
- The interblock tie-bar at the centre ribs improve steering response
- Double-ply casing and double steel belts construction guarantee a outstanding load capacity and durability performance



|              |         |
|--------------|---------|
| Rim Size     | 15 - 18 |
| Series       | 65 - 85 |
| Speed Rating | Q - R   |

TRAC LEGEND SL315

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    | 16"        | LT215/85R16 | E/10PR | 115/112Q      | 6.0J         | 216                | 772                   | 1215/1120      | 550                     | TL    |
|            | LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |            | LT235/85R16 | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
|            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    | 17"        | LT245/70R17 | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
| 16"        | 185/75R16C    | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |            | LT265/70R17 | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
|            | LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL    |            | LT285/70R17 | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |            | LT245/75R17 | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
|            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    | 18"        | LT235/80R17 | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
|            | LT285/75R16   | D/8PR  | 122/119Q      | 8.0J         | 286                | 834                   | 1500/1360      | 450                     | TL    |            | LT275/65R18 | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |

● Made in China    ● Made in Thailand






SL309



Benefits and Features

- All-season tread design with long tread life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves helps to evacuate water quickly and efficiently

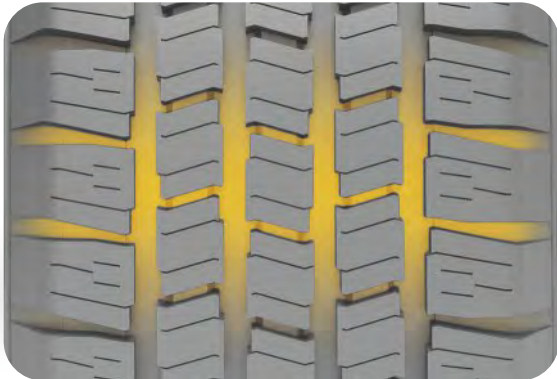

M+S

|              |         |
|--------------|---------|
| Rim Size     | 15 - 18 |
| Series       | 65 - 85 |
| Speed Rating | Q - R   |

SL309

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 31×10.50R15LT | C/6PR  | 109Q          | 8.5J         | 268                | 775                   | 1030           | 350                     | TL    |
|            | LT215/75R15   | C/6PR  | 100/97Q       | 6.0J         | 216                | 703                   | 800/730        | 350                     | TL    |
|            | LT235/75R15   | C/6PR  | 104/101Q      | 6.5J         | 235                | 733                   | 900/825        | 350                     | TL    |
| 16"        | 185/75R16C    | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |
|            | LT225/75R16   | E/10PR | 115/112Q      | 6.0J         | 223                | 744                   | 1215/1120      | 550                     | TL    |
|            | LT245/75R16   | E/10PR | 120/116Q      | 7.0J         | 248                | 774                   | 1380/1260      | 550                     | TL    |
|            | LT265/75R16   | E/10PR | 123/120Q      | 7.5J         | 267                | 804                   | 1550/1400      | 550                     | TL    |
|            | LT285/75R16   | D/8PR  | 122/119Q      | 8.0J         | 286                | 834                   | 1500/1360      | 450                     | TL    |
| 16"        | LT215/85R16   | E/10PR | 115/112Q      | 6.0J         | 216                | 772                   | 1215/1120      | 550                     | TL    |
|            | LT235/85R16   | E/10PR | 120/116Q      | 6.5J         | 235                | 806                   | 1380/1260      | 550                     | TL    |
|            | LT245/70R17   | E/10PR | 119/116Q      | 7.0J         | 248                | 776                   | 1360/1250      | 550                     | TL    |
|            | LT265/70R17   | E/10PR | 121/118Q      | 8.0J         | 272                | 804                   | 1450/1320      | 550                     | TL    |
| 17"        | LT285/70R17   | D/8PR  | 121/118Q      | 8.5J         | 292                | 832                   | 1450/1320      | 450                     | TL    |
|            | LT245/75R17   | E/10PR | 121/118Q      | 7.0J         | 248                | 800                   | 1450/1320      | 550                     | TL    |
|            | LT235/80R17   | E/10PR | 120/117Q      | 6.5J         | 235                | 808                   | 1400/1285      | 550                     | TL    |
| 18"        | LT275/65R18   | E/10PR | 123/120Q      | 8.0J         | 279                | 815                   | 1550/1400      | 550                     | TL    |

● Made in China    ● Made in Thailand







SC328



Benefits and Features

- Wide four ribs improve miles to tread life
- Zig-zag grooves offers enhanced traction on wet road
- Combination construction of polyester casing and steel belts provide outstanding durability

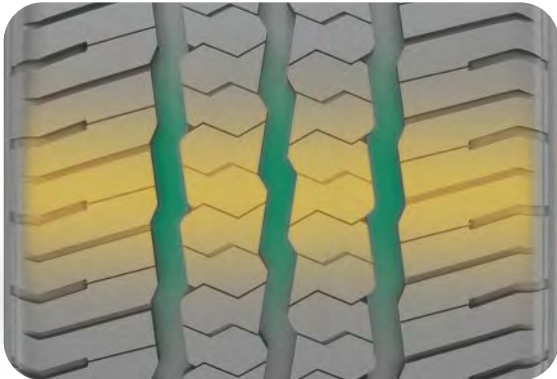

M+S

|              |         |
|--------------|---------|
| Rim Size     | 12 - 16 |
| Series       | 60 - 75 |
| Speed Rating | Q - T   |

SC328

| Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 12"        | 155R12C     | C/6PR  | 83/81Q        | 4.5B         | 157                | 550                   | 487/462        | 350                     | TL    |
|            | 155R12C     | D/8PR  | 88/86Q        | 4.5B         | 157                | 550                   | 560/530        | 450                     | TL    |
| 13"        | 155R13C     | D/8PR  | 90/88S        | 4.5B         | 157                | 578                   | 600/560        | 450                     | TL    |
|            | 165R13C     | C/6PR  | 91/89Q        | 4.5B         | 167                | 596                   | 615/580        | 375                     | TL    |
|            | 165R13C     | D/8PR  | 94/92Q        | 4.5B         | 165                | 594                   | 670/650        | 450                     | TL    |
|            | 175R13C     | D/8PR  | 97/95Q        | 5.0B         | 178                | 609                   | 730/690        | 450                     | TL    |
|            | 165/70R13C  | C/6PR  | 88/86S        | 5.0B         | 170                | 562                   | 560/530        | 375                     | TL    |
| 14"        | 185R14C     | D/8PR  | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
|            | 195R14C WSW | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
|            | 205R14C     | D/8PR  | 109/107R      | 6.0J         | 208                | 686                   | 1030/975       | 450                     | TL    |
|            | 215R14C     | D/8PR  | 112/110Q      | 6.0J         | 218                | 700                   | 1120/1060      | 450                     | TL    |
|            | 165/70R14C  | C/6PR  | 89/87R        | 5.0J         | 170                | 588                   | 580/545        | 375                     | TL    |
|            | 205/70R14C  | C/6PR  | 102/100R      | 6.0J         | 209                | 644                   | 850/800        | 375                     | TL    |
|            | 215/75R14C  | D/8PR  | 112/110Q      | 6.0J         | 216                | 678                   | 1120/1060      | 475                     | TL    |
| 15"        | 185R15C     | D/8PR  | 103/102R      | 5.5J         | 188                | 674                   | 875/850        | 450                     | TL    |
|            | 195R15C     | D/8PR  | 106/104R      | 5.5J         | 198                | 690                   | 950/900        | 450                     | TL    |
|            | 215R15C     | D/8PR  | 112/110Q      | 6.0J         | 218                | 724                   | 1120/1060      | 450                     | TL    |
|            | 205/65R15C  | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL    |
|            | 195/70R15C  | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    |
|            | 205/70R15C  | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL    |
|            | 215/75R15C  | D/8PR  | 112/110Q      | 6.0J         | 216                | 678                   | 1120/1060      | 475                     | TL    |
| 15"        | 215/70R15C  | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL    |
|            | 225/70R15C  | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL    |
| 16"        | 175R16C     | C/6PR  | 98/96Q        | 5.0J         | 178                | 684                   | 750/710        | 375                     | TL    |
|            | 215/60R16C  | D/8PR  | 108/106T      | 6.5J         | 221                | 664                   | 1000/950       | 475                     | TL    |
|            | 195/65R16C  | D/8PR  | 104/102T      | 6.0J         | 201                | 660                   | 900/850        | 475                     | TL    |
|            | 205/65R16C  | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL    |
|            | 215/65R16C  | D/8PR  | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
|            | 225/65R16C  | D/8PR  | 112/110R      | 6.5J         | 228                | 698                   | 1120/1060      | 475                     | TL    |
|            | 235/65R16C  | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL    |
|            | 235/65R16C  | F/12PR | 121/119R      | 7.0J         | 240                | 712                   | 1450/1360      | 575                     | TL    |
|            | 215/70R16C  | C/6PR  | 108/106T      | 6.5J         | 221                | 708                   | 1000/950       | 375                     | TL    |
|            | 215/70R16C  | E/10PR | 113/111Q      | 6.5J         | 221                | 708                   | 1150/1090      | 585                     | TL    |
|            | 175/75R16C  | D/8PR  | 101/99Q       | 5.0J         | 177                | 668                   | 825/775        | 475                     | TL    |
|            | 195/75R16C  | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL    |
|            | 195/75R16C  | E/10PR | 110/108R      | 5.5J         | 196                | 698                   | 1060/1000      | 525                     | TL    |
|            | 205/75R16C  | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL    |
|            | 205/75R16C  | E/10PR | 113/111R      | 5.5J         | 203                | 714                   | 1150/1090      | 525                     | TL    |
|            | 205/75R16C  | F/12PR | 116/114R      | 5.5J         | 203                | 714                   | 1250/1180      | 575                     | TL    |
|            | 215/75R16C  | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL    |
|            | 215/75R16C  | E/10PR | 116/114R      | 6.0J         | 216                | 728                   | 1250/1180      | 525                     | TL    |

Made in China Made in Thailand WSW White Sidewall Tyre (WSW)





SC326



Benefits and Features

- Balanced pattern arrangement for increased traction
- Latest profile design ensure longer tyre life
- Improved casing structure provides outstanding durability



|              |         |
|--------------|---------|
| Rim Size     | 14 - 16 |
| Series       | 65 - 75 |
| Speed Rating | Q - T   |

SC326

| Rim (inch) | Size    | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch)       | Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------------|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 14"        | 185R14C | D/8PR  | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    | 15"              | 205/70R15C | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL    |
|            | 195R14C | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |                  | 205/70R15C | E/10PR | 108/106Q      | 6.0J         | 209                | 669                   | 1000/950       | 525                     | TL    |
|            | 195R14C | E/10PR | 110/108Q      | 5.5J         | 198                | 666                   | 1060/1000      | 525                     | TL    |                  | 215/70R15C | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL    |
|            | 205R14C | D/8PR  | 109/107Q      | 6.0J         | 208                | 686                   | 1030/975       | 450                     | TL    |                  | 225/75R15C | D/8PR  | 116/114Q      | 6.0J         | 223                | 719                   | 1250/1180      | 475                     | TL    |
|            | 205R14C | E/10PR | 113/111Q      | 6.0J         | 208                | 686                   | 1150/1090      | 525                     | TL    | 16"              | 215/65R16C | D/8PR  | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
| 15"        | 215R14C | D/8PR  | 112/110Q      | 6.0J         | 218                | 700                   | 1120/1060      | 450                     | TL    |                  | 235/65R16C | F/12PR | 121/119R      | 7.0J         | 240                | 712                   | 1450/1360      | 575                     | TL    |
|            | 195R15C | D/8PR  | 106/104R      | 5.5J         | 198                | 690                   | 950/900        | 450                     | TL    |                  | 215/70R16C | C/6PR  | 108/106T      | 6.5J         | 221                | 708                   | 1000/950       | 375                     | TL    |
|            | 215R15C | D/8PR  | 112/110Q      | 6.0J         | 218                | 724                   | 1120/1060      | 450                     | TL    | Made in Thailand |            |        |               |              |                    |                       |                |                         |       |






H188



Benefits and Features

- Valuable commercial light truck tyre for vehicles on paved roads
- 3 rib grooves provides improved handling and comfort
- Polyester tyre casing with steel belts for good durability

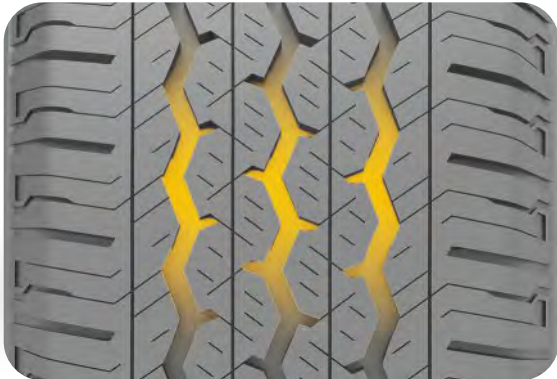

|              |         |
|--------------|---------|
| Rim Size     | 12 - 16 |
| Series       | 60 - 75 |
| Speed Rating | Q - H   |

H188

| Rim (inch) | Size          | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|---------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 12"        | 155R12C       | C/6PR  | 83/81Q        | 4.5B         | 157                | 550                   | 487/462        | 350                     | TL    |
|            | 155R12C       | D/8PR  | 88/86Q        | 4.5B         | 157                | 550                   | 560/530        | 450                     | TL    |
| 13"        | 155R13C       | D/8PR  | 90/88S        | 4.5B         | 157                | 578                   | 600/560        | 450                     | TL    |
|            | 165R13C       | C/6PR  | 91/89S        | 4.5B         | 167                | 596                   | 615/580        | 375                     | TL    |
|            | 165/70R13C    | C/6PR  | 88/86S        | 5.0J         | 170                | 562                   | 560/530        | 375                     | TL    |
| 14"        | 185R14CWSW    | D/8PR  | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
|            | 195R14CWSW    | D/8PR  | 106/104Q      | 5.5J         | 198                | 666                   | 950/900        | 450                     | TL    |
|            | 175/70R14C    | C/6PR  | 95/93S        | 5.0J         | 177                | 602                   | 690/650        | 375                     | TL    |
|            | 175/75R14C    | D/8PR  | 94/91S        | 5.0J         | 177                | 618                   | 775/750        | 475                     | TL    |
|            | 195R15CWSW    | D/8PR  | 106/104R      | 5.5J         | 198                | 690                   | 950/900        | 450                     | TL    |
| 15"        | 205/65R15C    | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL    |
|            | 215/65R15C    | C/6PR  | 104/102T      | 6.5J         | 221                | 661                   | 900/850        | 375                     | TL    |
|            | 195/70R15C    | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    |
|            | 205/70R15C    | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL    |
|            | 215/70R15C    | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 475                     | TL    |
| 15"        | 215/70R15CWSW | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 475                     | TL    |
|            | 225/70R15CWSW | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL    |
| 16"        | 195/60R16C    | C/6PR  | 99/97H        | 6.0J         | 201                | 640                   | 775/730        | 375                     | TL    |
|            | 215/60R16C    | D/8PR  | 108/106T      | 6.5J         | 221                | 664                   | 1000/950       | 475                     | TL    |
|            | 195/65R16C    | D/8PR  | 104/102T      | 6.0J         | 201                | 660                   | 900/850        | 475                     | TL    |
|            | 205/65R16C    | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL    |
|            | 215/65R16C    | D/8PR  | 109/107T      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
|            | 225/65R16C    | D/8PR  | 112/110T      | 6.5J         | 228                | 698                   | 1120/1060      | 475                     | TL    |
|            | 235/65R16C    | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL    |
|            | 185/75R16C    | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |
|            | 195/75R16C    | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL    |
|            | 205/75R16C    | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL    |
| 16"        | 215/75R16C    | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL    |
|            | 225/75R16C    | E/10PR | 118/116R      | 6.0J         | 223                | 744                   | 1320/1250      | 525                     | TL    |

🇨🇳 Made in China 🇹🇭 Made in Thailand WSW White SideWall (WSW)





ST313



Benefits and Features

- Applicable for mini-bus, van and commercial light trucks
- Strong sidewall design enables high durability and fights off cuts and abrasion in city roads
- Triply polyester belts plies creates strength bearing heavy loads with superior stability



|              |         |
|--------------|---------|
| Rim Size     | 15 - 16 |
| Series       | 75 - 85 |
| Speed Rating | L - R   |

ST313

| Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 6.50R15LT   | E/10PR | 107/105N      | 5.5F         | 180                | 730                   | 975/925        | 560                     | TT/TL |
|            | 7.00R15LT   | E/10PR | 110/106N      | 5.5F         | 200                | 750                   | 1060/950       | 560                     | TT/TL |
|            | 195/75R15C  | F/12PR | 109/107L      | 5.5J         | 196                | 673                   | 1030/975       | 600                     | TL    |
|            | 195/85R15C  | F/12PR | 113/111L      | 5.5J         | 196                | 713                   | 1150/1090      | 600                     | TL    |
| 16"        | 6.50R16LT   | E/10PR | 108/107N      | 5.5F         | 185                | 750                   | 1000/975       | 560                     | TT/TL |
|            | 7.00R16LT   | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1285/1250      | 670                     | TT/TL |
|            | 7.00R16LT   | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1285/1250      | 670                     | TT/TL |
|            | 7.50R16LT   | G/14PR | 122/121L      | 6.0G         | 220                | 808                   | 1500/1450      | 740                     | TT/TL |
| 16"        | 205/75R16C  | F/12PR | 116/114R      | 5.5J         | 203                | 714                   | 1250/1180      | 575                     | TL    |
|            | 185/85R16LT | F/12PR | 111/109L      | 5.0J         | 184                | 720                   | 1090/1030      | 600                     | TL    |
|            | 195/85R16LT | F/12PR | 114/112L      | 5.5J         | 196                | 738                   | 1180/1120      | 600                     | TL    |
|            | 205/85R16LT | F/12PR | 117/115L      | 5.5J         | 203                | 754                   | 1285/1215      | 600                     | TL    |
| 16"        | 205/85R16LT | F/12PR | 117/115L      | 5.5J         | 203                | 754                   | 1285/1215      | 600                     | TL    |
|            | 205/85R16LT | F/12PR | 117/115L      | 5.5J         | 203                | 754                   | 1285/1215      | 600                     | TL    |

🇨🇳 Made in China 🇹🇭 Made in Thailand






Zuper Snow Z-507



Benefits and Features

- Asymmetric pattern design provides superior handing on snow surface
- Optimised lateral groove angle offers strong snow performance
- Special zigzag traction sipes improves traction and braking performance on snow roads

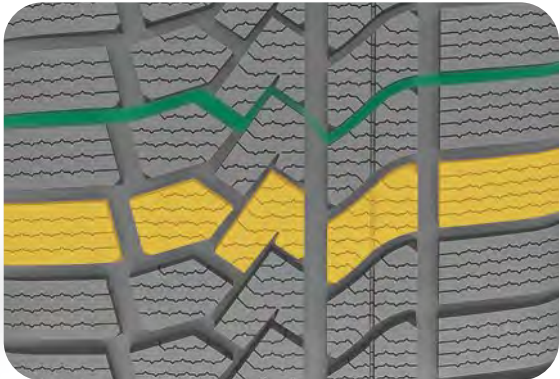

M+S



|              |         |
|--------------|---------|
| Rim Size     | 16 - 20 |
| Series       | 35 - 70 |
| Speed Rating | H - V   |

Zuper Snow Z-507

| Rim (inch) | Size        | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size        | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|-------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 16"        | 195/45R16XL | -     | 84V           | 6.5J         | 195                | 582                   | 500            | 350                     | TL    | 18"        | 255/40R18XL | -     | 99V           | 9.0J         | 260                | 661                   | 775            | 350                     | TL    |
|            | 205/45R16XL | -     | 87V           | 7.0J         | 206                | 590                   | 545            | 350                     | TL    |            | 215/45R18XL | -     | 93V           | 7.0J         | 213                | 651                   | 650            | 350                     | TL    |
|            | 215/45R16   | -     | 90V           | 7.0J         | 213                | 600                   | 600            | 350                     | TL    |            | 225/45R18XL | -     | 95V           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
|            | 205/50R16XL | -     | 91V           | 6.5J         | 214                | 612                   | 615            | 350                     | TL    |            | 235/45R18XL | -     | 98V           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
|            | 185/55R16   | -     | 83H           | 6.0J         | 194                | 610                   | 487            | 300                     | TL    |            | 245/45R18XL | -     | 100V          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
|            | 205/55R16   | -     | 91V           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |            | 255/45R18XL | -     | 103V          | 8.5J         | 255                | 687                   | 875            | 350                     | TL    |
|            | 215/55R16XL | -     | 97H           | 7.0J         | 226                | 642                   | 730            | 350                     | TL    |            | 215/50R18   | -     | 92V           | 7.0J         | 226                | 673                   | 630            | 300                     | TL    |
|            | 225/55R16XL | -     | 99V           | 7.0J         | 233                | 654                   | 775            | 350                     | TL    |            | 225/50R18XL | -     | 99V           | 7.0J         | 233                | 683                   | 775            | 350                     | TL    |
|            | 205/60R16   | -     | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |            | 235/50R18XL | -     | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
|            | 215/60R16XL | -     | 99H           | 6.5J         | 221                | 664                   | 775            | 350                     | TL    |            | 245/50R18XL | -     | 104V          | 7.5J         | 253                | 703                   | 900            | 350                     | TL    |
|            | 225/60R16   | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |            | 215/55R18XL | -     | 99V           | 7.0J         | 226                | 693                   | 775            | 350                     | TL    |
|            | 235/60R16   | -     | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | TL    |            | 225/55R18XL | -     | 102V          | 7.0J         | 233                | 705                   | 850            | 350                     | TL    |
|            | 215/65R16   | -     | 98H           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |            | 235/55R18XL | -     | 104V          | 7.5J         | 245                | 715                   | 900            | 350                     | TL    |
|            | 215/70R16   | -     | 100H          | 6.5J         | 221                | 708                   | 800            | 300                     | TL    |            | 255/55R18XL | -     | 109V          | 8.0J         | 265                | 737                   | 1030           | 350                     | TL    |
|            | 235/70R16   | -     | 106H          | 7.0J         | 240                | 736                   | 950            | 300                     | TL    |            | 225/60R18XL | -     | 104V          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
|            | 245/70R16   | -     | 107H          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |            | 235/60R18XL | -     | 107V          | 7.0J         | 240                | 739                   | 975            | 350                     | TL    |
|            | 265/70R16   | -     | 112H          | 8.0J         | 272                | 778                   | 1120           | 300                     | TL    | 19"        | 225/35R19XL | -     | 88V           | 8.0J         | 230                | 641                   | 560            | 350                     | TL    |
| 17"        | 215/45R17XL | -     | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |            | 235/35R19XL | -     | 91V           | 8.5J         | 241                | 647                   | 615            | 350                     | TL    |
|            | 225/45R17XL | -     | 94V           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |            | 255/35R19XL | -     | 96V           | 9.0J         | 260                | 661                   | 710            | 350                     | TL    |
|            | 235/45R17XL | -     | 97V           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |            | 225/40R19XL | -     | 93V           | 8.0J         | 230                | 663                   | 650            | 350                     | TL    |
|            | 245/45R17XL | -     | 99V           | 8.0J         | 243                | 652                   | 775            | 350                     | TL    |            | 235/40R19XL | -     | 96V           | 8.5J         | 241                | 671                   | 710            | 350                     | TL    |
|            | 205/50R17XL | -     | 93V           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |            | 245/40R19XL | -     | 98V           | 8.5J         | 248                | 679                   | 750            | 350                     | TL    |
|            | 215/50R17XL | -     | 95V           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |            | 255/40R19XL | -     | 100V          | 9.0J         | 260                | 687                   | 800            | 350                     | TL    |
|            | 225/50R17XL | -     | 98V           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |            | 275/40R19XL | -     | 105V          | 9.5J         | 278                | 703                   | 925            | 350                     | TL    |
|            | 205/55R17XL | -     | 95V           | 6.5J         | 214                | 658                   | 690            | 350                     | TL    |            | 225/45R19XL | -     | 96V           | 7.5J         | 225                | 685                   | 710            | 350                     | TL    |
|            | 215/55R17XL | -     | 98V           | 7.0J         | 226                | 668                   | 750            | 350                     | TL    |            | 235/45R19XL | -     | 99V           | 8.0J         | 236                | 695                   | 775            | 350                     | TL    |
|            | 225/55R17XL | -     | 101V          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |            | 245/45R19XL | -     | 102V          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |
|            | 235/55R17XL | -     | 103V          | 7.5J         | 245                | 690                   | 875            | 350                     | TL    |            | 255/45R19XL | -     | 104V          | 8.5J         | 255                | 713                   | 900            | 350                     | TL    |
|            | 215/60R17XL | -     | 100V          | 6.5J         | 221                | 690                   | 800            | 350                     | TL    |            | 235/50R19XL | -     | 103V          | 7.5J         | 245                | 719                   | 875            | 350                     | TL    |
|            | 225/60R17XL | -     | 103V          | 6.5J         | 228                | 702                   | 875            | 350                     | TL    |            | 245/50R19XL | -     | 105H          | 7.5J         | 253                | 729                   | 925            | 350                     | TL    |
|            | 235/60R17   | -     | 102V          | 7.0J         | 240                | 714                   | 850            | 300                     | TL    |            | 255/50R19XL | -     | 107V          | 8.0J         | 265                | 739                   | 975            | 350                     | TL    |
|            | 225/65R17   | -     | 102H          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |            | 225/55R19   | -     | 99V           | 7.0J         | 233                | 731                   | 775            | 300                     | TL    |
|            | 245/65R17   | -     | 107H          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |            | 235/55R19XL | -     | 105V          | 7.5J         | 245                | 741                   | 925            | 350                     | TL    |
|            | 265/65R17   | -     | 112H          | 8.0J         | 272                | 776                   | 1120           | 300                     | TL    |            | 255/55R19XL | -     | 111H          | 8.0J         | 265                | 763                   | 1090           | 350                     | TL    |
| 18"        | 225/40R18XL | -     | 92V           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    | 20"        | 275/40R20XL | -     | 106V          | 9.5J         | 278                | 728                   | 950            | 350                     | TL    |
|            | 235/40R18XL | -     | 95V           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |            | 255/45R20XL | -     | 105V          | 8.5J         | 255                | 738                   | 925            | 350                     | TL    |
|            | 245/40R18XL | -     | 97V           | 8.5J         | 248                | 653                   | 730            | 350                     | TL    |            | 275/45R20XL | -     | 110V          | 9.0J         | 273                | 756                   | 1060           | 350                     | TL    |

Made in China





SW608



Benefits and Features

- V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly
- Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions
- Special winter tread compound offers performance driving



Ice & Snow

Silent

Efficiency

Silica

M+S

|              |         |
|--------------|---------|
| Rim Size     | 13 - 20 |
| Series       | 30 - 80 |
| Speed Rating | Q - V   |

SW608

| Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 14"        | 185R14C      | D/8PR | 102/100Q      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
| 15"        | 195/70R15C   | D/8PR | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    |
| 13"        | 155/70R13    | -     | 75T           | 4.5B         | 157                | 548                   | 387            | 300                     | TL    |
|            | 165/70R13    | -     | 79T           | 5.0B         | 170                | 562                   | 437            | 300                     | TL    |
|            | 175/70R13    | -     | 82T           | 5.0B         | 177                | 576                   | 475            | 350                     | TL    |
|            | 155/80R13    | -     | 79T           | 4.5B         | 157                | 578                   | 437            | 300                     | TL    |
| 14"        | 185/60R14    | -     | 82H           | 5.5J         | 189                | 578                   | 475            | 300                     | TL    |
|            | 195/60R14    | -     | 86H           | 6.0J         | 201                | 590                   | 530            | 300                     | TL    |
|            | 155/65R14    | -     | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | TL    |
|            | 175/65R14    | -     | 82H           | 5.0J         | 177                | 584                   | 475            | 300                     | TL    |
|            | 185/65R14    | -     | 86H           | 5.5J         | 189                | 596                   | 530            | 350                     | TL    |
|            | 165/70R14    | -     | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | TL    |
|            | 175/70R14    | -     | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | TL    |
|            | 185/70R14    | -     | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | TL    |
|            | 195/70R14    | -     | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | TL    |
|            | 185/55R15 XL | -     | 86H/V         | 6.0J         | 194                | 585                   | 530            | 350                     | TL    |
| 15"        | 195/55R15 XL | -     | 89H           | 6.0J         | 201                | 595                   | 580            | 350                     | TL    |
|            | 185/60R15 XL | -     | 88H           | 5.5J         | 189                | 603                   | 560            | 350                     | TL    |
|            | 195/60R15    | -     | 88H           | 6.0J         | 201                | 615                   | 560            | 300                     | TL    |
|            | 175/65R15    | -     | 84T           | 5.0J         | 177                | 609                   | 500            | 300                     | TL    |
|            | 185/65R15    | -     | 88H           | 5.5J         | 189                | 621                   | 560            | 300                     | TL    |
|            | 195/65R15    | -     | 91H           | 6.0J         | 201                | 635                   | 615            | 300                     | TL    |
|            | 205/65R15    | -     | 94H           | 6.0J         | 209                | 647                   | 670            | 300                     | TL    |
|            | 215/70R15    | -     | 98H           | 6.5J         | 221                | 683                   | 750            | 300                     | TL    |
|            | 195/50R16 XL | -     | 88H           | 6.0J         | 201                | 602                   | 560            | 350                     | TL    |
|            | 225/50R16 XL | -     | 96V           | 7.0J         | 233                | 632                   | 710            | 350                     | TL    |
| 16"        | 195/55R16    | -     | 87H           | 6.0J         | 201                | 620                   | 545            | 300                     | TL    |
|            | 205/55R16    | -     | 91H           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |
|            | 215/55R16 XL | -     | 97H           | 7.0J         | 226                | 642                   | 730            | 350                     | TL    |
|            | 225/55R16 XL | -     | 99H           | 7.0J         | 233                | 654                   | 775            | 350                     | TL    |
|            | 205/60R16    | -     | 92H           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |
|            | 215/60R16 XL | -     | 99H           | 6.5J         | 221                | 664                   | 775            | 350                     | TL    |
|            | 225/60R16    | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
|            | 215/65R16    | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
|            | 215/65R16    | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
|            | 215/65R16    | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 16"        | 215/65R16    | -     | 98H           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    |
| 17"        | 205/40R17 XL | -     | 84V           | 7.5J         | 212                | 596                   | 500            | 350                     | TL    |
|            | 215/40R17 XL | -     | 87V           | 7.5J         | 218                | 604                   | 545            | 350                     | TL    |
|            | 245/40R17 XL | -     | 95V           | 8.5J         | 248                | 628                   | 690            | 350                     | TL    |
|            | 205/45R17 XL | -     | 88V           | 7.0J         | 206                | 616                   | 560            | 350                     | TL    |
|            | 215/45R17 XL | -     | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
|            | 225/45R17 XL | -     | 94V           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |
|            | 235/45R17 XL | -     | 97H           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |
|            | 245/45R17 XL | -     | 99V           | 8.0J         | 243                | 652                   | 775            | 350                     | TL    |
|            | 205/50R17 XL | -     | 93H           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |
|            | 215/50R17 XL | -     | 95V           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |
| 18"        | 225/50R17 XL | -     | 98H           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |
|            | 215/55R17 XL | -     | 98V           | 7.0J         | 226                | 668                   | 750            | 350                     | TL    |
|            | 225/55R17 XL | -     | 101V          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
|            | 235/55R17 XL | -     | 103V          | 7.5J         | 245                | 690                   | 875            | 350                     | TL    |
|            | 215/60R17    | -     | 96H           | 6.5J         | 221                | 690                   | 710            | 300                     | TL    |
|            | 225/60R17    | -     | 99H           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
|            | 235/65R17 XL | -     | 108H          | 7.0J         | 240                | 738                   | 1000           | 350                     | TL    |
|            | 225/40R18 XL | -     | 92V           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |
|            | 235/40R18 XL | -     | 95V           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |
|            | 245/40R18 XL | -     | 97V           | 8.5J         | 248                | 653                   | 730            | 350                     | TL    |
| 19"        | 225/45R18 XL | -     | 95V           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
|            | 235/45R18 XL | -     | 98V           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
|            | 245/45R18 XL | -     | 100V          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
|            | 225/50R18 XL | -     | 99V           | 7.0J         | 233                | 683                   | 775            | 350                     | TL    |
|            | 235/50R18 XL | -     | 101V          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
|            | 245/50R18 XL | -     | 104V          | 7.5J         | 253                | 703                   | 900            | 350                     | TL    |
|            | 225/60R18 XL | -     | 104V          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
|            | 225/35R19 XL | -     | 88V           | 8.0J         | 230                | 641                   | 560            | 350                     | TL    |
|            | 235/45R19 XL | -     | 99V           | 8.0J         | 236                | 695                   | 775            | 350                     | TL    |
|            | 245/45R19 XL | -     | 102V          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |
| 20"        | 245/30R20 XL | -     | 90V           | 8.5J         | 248                | 656                   | 600            | 350                     | TL    |

● Made in China







SW628



Benefits and Features

- Asymmetric pattern design provides superior handing on snow surface
- Deeper tread grooves and sipes design helps to maintain a strong traction performance in extreme road condition
- Silica-enhanced tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

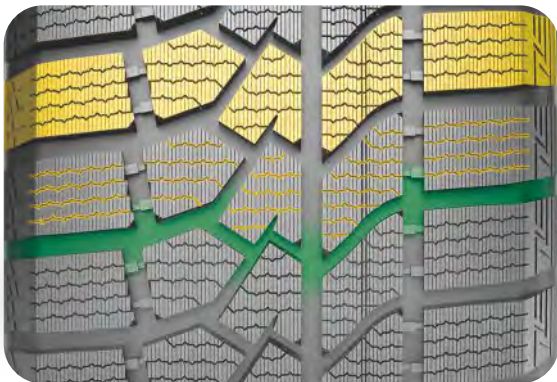

M+S



|              |         |
|--------------|---------|
| Rim Size     | 14 - 22 |
| Series       | 35 - 75 |
| Speed Rating | T - V   |

SW628

| Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 14"        | 195/60R14    | -     | 86T           | 6.0J         | 201                | 590                   | 530            | 300                     | TL    | 18"        | 255/60R18 XL | -     | 112T          | 7.5J         | 260                | 763                   | 1120           | 350                     | TL    |
| 15"        | 195/50R15    | -     | 82T           | 6.0J         | 201                | 577                   | 475            | 300                     | TL    |            | 265/60R18 XL | -     | 114T          | 8.0J         | 272                | 775                   | 1180           | 350                     | TL    |
|            | 175/65R15    | -     | 84T           | 5.0J         | 177                | 609                   | 500            | 300                     | TL    |            | 285/60R18    | -     | 116T          | 8.5J         | 292                | 799                   | 1250           | 300                     | TL    |
|            | 215/75R15    | -     | 100T          | 6.0J         | 216                | 703                   | 800            | 300                     | TL    |            | 235/65R18    | -     | 106T          | 7.0J         | 240                | 763                   | 950            | 300                     | TL    |
|            | 225/75R15    | -     | 102T          | 6.0J         | 223                | 719                   | 850            | 300                     | TL    |            | 265/65R18    | -     | 114T          | 8.0J         | 272                | 801                   | 1180           | 300                     | TL    |
|            | 235/75R15    | -     | 105T          | 6.5J         | 235                | 733                   | 925            | 300                     | TL    | 19"        | 275/35R19 XL | -     | 100H          | 9.5J         | 278                | 675                   | 800            | 350                     | TL    |
| 16"        | 205/55R16    | -     | 91T           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |            | 245/40R19 XL | -     | 98H           | 8.5J         | 248                | 679                   | 750            | 350                     | TL    |
|            | 215/55R16    | -     | 93T           | 7.0J         | 226                | 642                   | 650            | 300                     | TL    |            | 255/40R19 XL | -     | 100H          | 9.0J         | 260                | 687                   | 800            | 350                     | TL    |
|            | 205/60R16    | -     | 92T           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |            | 275/40R19 XL | -     | 105H          | 9.5J         | 278                | 703                   | 925            | 350                     | TL    |
|            | 215/60R16    | -     | 95T           | 6.5J         | 221                | 664                   | 690            | 300                     | TL    |            | 225/45R19 XL | -     | 96H           | 7.5J         | 225                | 685                   | 710            | 350                     | TL    |
|            | 235/60R16    | -     | 100H          | 7.0J         | 240                | 688                   | 800            | 300                     | TL    |            | 245/45R19 XL | -     | 102H          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |
|            | 215/70R16    | -     | 100T          | 6.5J         | 221                | 708                   | 800            | 300                     | TL    |            | 255/45R19 XL | -     | 104H          | 8.5J         | 255                | 713                   | 900            | 350                     | TL    |
|            | 225/70R16    | -     | 103T          | 6.5J         | 228                | 722                   | 875            | 300                     | TL    |            | 275/45R19 XL | -     | 108H          | 9.0J         | 273                | 731                   | 1000           | 350                     | TL    |
|            | 235/70R16    | -     | 106T          | 7.0J         | 240                | 736                   | 950            | 300                     | TL    |            | 245/50R19 XL | -     | 105H          | 7.5J         | 253                | 729                   | 925            | 350                     | TL    |
|            | 245/70R16    | -     | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |            | 255/50R19 XL | -     | 107H          | 8.0J         | 265                | 739                   | 975            | 350                     | TL    |
|            | 265/70R16    | -     | 112T          | 8.0J         | 272                | 778                   | 1120           | 300                     | TL    |            | 265/50R19 XL | -     | 110H          | 8.5J         | 277                | 749                   | 1060           | 350                     | TL    |
| 17"        | 225/45R17    | -     | 91H           | 7.5J         | 225                | 634                   | 615            | 300                     | TL    |            | 225/55R19    | -     | 99H           | 7.0J         | 233                | 731                   | 775            | 300                     | TL    |
|            | 205/50R17 XL | -     | 93H           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |            | 245/55R19    | -     | 103H          | 7.5J         | 253                | 753                   | 875            | 300                     | TL    |
|            | 225/50R17    | -     | 94T           | 7.0J         | 233                | 658                   | 670            | 300                     | TL    |            | 275/55R19    | -     | 111T          | 8.5J         | 284                | 785                   | 1090           | 300                     | TL    |
|            | 205/55R17 XL | -     | 95H           | 6.5J         | 214                | 658                   | 690            | 350                     | TL    |            | 235/60R19 XL | -     | 107T          | 7.0J         | 240                | 765                   | 975            | 350                     | TL    |
|            | 215/55R17    | -     | 94T           | 7.0J         | 226                | 668                   | 670            | 300                     | TL    |            | 255/60R19 XL | -     | 113T          | 7.5J         | 260                | 789                   | 1150           | 350                     | TL    |
|            | 225/55R17    | -     | 97T           | 7.0J         | 233                | 680                   | 730            | 300                     | TL    | 20"        | 315/35R20 XL | -     | 110H          | 11.0J        | 320                | 728                   | 1060           | 350                     | TL    |
|            | 235/55R17    | -     | 99H           | 7.5J         | 245                | 690                   | 775            | 300                     | TL    |            | 255/40R20 XL | -     | 101H          | 9.0J         | 260                | 712                   | 825            | 350                     | TL    |
|            | 215/60R17    | -     | 96T           | 6.5J         | 221                | 690                   | 710            | 300                     | TL    |            | 275/40R20 XL | -     | 106H          | 9.5J         | 278                | 728                   | 950            | 350                     | TL    |
|            | 225/60R17    | -     | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |            | 285/40R20    | -     | 104H          | 10.0J        | 290                | 736                   | 900            | 300                     | TL    |
|            | 255/60R17 XL | -     | 110T          | 7.5J         | 260                | 738                   | 1060           | 350                     | TL    |            | 235/45R20 XL | -     | 100H          | 8.0J         | 236                | 720                   | 800            | 350                     | TL    |
|            | 215/65R17    | -     | 99T           | 6.5J         | 221                | 712                   | 775            | 300                     | TL    |            | 245/45R20 XL | -     | 103H          | 8.0J         | 243                | 728                   | 875            | 350                     | TL    |
|            | 225/65R17    | -     | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |            | 255/45R20 XL | -     | 105H          | 8.5J         | 255                | 738                   | 925            | 350                     | TL    |
|            | 245/65R17    | -     | 107T          | 7.0J         | 248                | 750                   | 975            | 300                     | TL    |            | 235/50R20 XL | -     | 104H          | 7.5J         | 245                | 744                   | 900            | 350                     | TL    |
|            | 265/65R17    | -     | 112T          | 8.0J         | 272                | 776                   | 1120           | 300                     | TL    |            | 245/50R20    | -     | 102H          | 7.5J         | 253                | 754                   | 850            | 300                     | TL    |
|            | 285/65R17    | -     | 116T          | 8.5J         | 292                | 802                   | 1250           | 300                     | TL    |            | 265/50R20 XL | -     | 111H          | 8.5J         | 277                | 774                   | 1090           | 350                     | TL    |
|            | 245/70R17    | -     | 110T          | 7.0J         | 248                | 776                   | 1060           | 300                     | TL    |            | 275/50R20 XL | -     | 113H          | 8.5J         | 284                | 784                   | 1150           | 350                     | TL    |
|            | 265/70R17    | -     | 115T          | 8.0J         | 272                | 804                   | 1215           | 300                     | TL    |            | 285/50R20 XL | -     | 116H          | 9.0J         | 297                | 794                   | 1250           | 350                     | TL    |
| 18"        | 225/40R18 XL | -     | 92H           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |            | 235/55R20 XL | -     | 105H          | 7.5J         | 245                | 766                   | 925            | 350                     | TL    |
|            | 245/40R18 XL | -     | 97H           | 8.5J         | 248                | 653                   | 730            | 350                     | TL    |            | 255/55R20 XL | -     | 110H          | 8.0J         | 265                | 788                   | 1060           | 350                     | TL    |
|            | 255/40R18 XL | -     | 99H           | 9.0J         | 260                | 661                   | 775            | 350                     | TL    |            | 275/55R20 XL | -     | 117H          | 8.5J         | 284                | 810                   | 1285           | 350                     | TL    |
|            | 215/45R18 XL | -     | 93V           | 7.0J         | 213                | 651                   | 650            | 350                     | TL    | 21"        | 315/35R21 XL | -     | 111H          | 11.0J        | 320                | 753                   | 1090           | 350                     | TL    |
|            | 245/45R18 XL | -     | 100T          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |            | 295/40R21 XL | -     | 111H          | 10.5J        | 301                | 769                   | 1090           | 350                     | TL    |
|            | 255/45R18 XL | -     | 103H          | 8.5J         | 255                | 687                   | 875            | 350                     | TL    |            | 255/45R21    | -     | 102H          | 8.5J         | 255                | 763                   | 850            | 300                     | TL    |
|            | 215/50R18    | -     | 92H           | 7.0J         | 226                | 673                   | 630            | 300                     | TL    |            | 265/45R21    | -     | 104H          | 9.0J         | 266                | 771                   | 900            | 300                     | TL    |
|            | 225/50R18 XL | -     | 99H           | 7.0J         | 233                | 683                   | 775            | 350                     | TL    |            | 275/45R21 XL | -     | 110H          | 9.0J         | 273                | 781                   | 1160           | 350                     | TL    |
|            | 255/55R18 XL | -     | 109H          | 8.0J         | 265                | 737                   | 1030           | 350                     | TL    |            | 275/50R21 XL | -     | 113H          | 8.5J         | 284                | 809                   | 1150           | 350                     | TL    |
|            | 225/60R18 XL | -     | 104H          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    | 22"        | 265/40R22 XL | -     | 106H          | 9.5J         | 271                | 771                   | 950            | 350                     | TL    |
|            | 235/60R18    | -     | 103T          | 7.0J         | 240                | 739                   | 875            | 300                     | TL    |            |              |       |               |              |                    |                       |                |                         |       |

Made in China






SW618



Benefits and Features

- Premium studless winter tyre providing excellent snow, slush and wet traction in cold climates
- Special pattern design to promote aggressive bite in deep snow and wet road conditions
- Superior tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

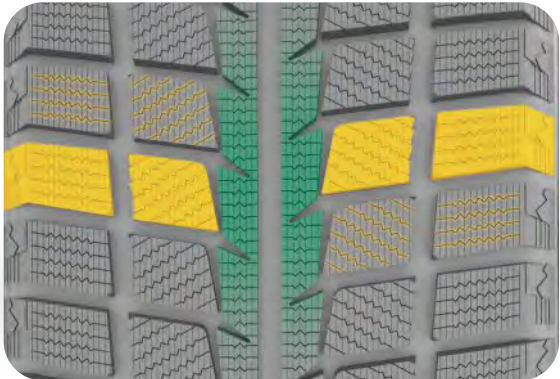

M+S



|              |         |
|--------------|---------|
| Rim Size     | 13 - 20 |
| Series       | 30 - 70 |
| Speed Rating | T - V   |

SW618

| Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 13"        | 155/65R13    | -     | 73T           | 4.5J         | 157                | 532                   | 365            | 300                     | TL    | 16"        | 205/65R16    | -     | 95T           | 6.0J         | 209                | 672                   | 690            | 300                     | TL    |
|            | 165/65R13    | -     | 77T           | 5.0J         | 170                | 544                   | 412            | 300                     | TL    |            | 215/65R16    | -     | 98T           | 6.5J         | 221                | 686                   | 750            | 300                     | TL    |
|            | 165/70R13    | -     | 79T           | 5.0J         | 170                | 562                   | 437            | 300                     | TL    |            | 225/65R16    | -     | 100T          | 6.5J         | 228                | 698                   | 800            | 300                     | TL    |
|            | 175/70R13    | -     | 82T           | 5.0J         | 177                | 576                   | 475            | 300                     | TL    | 17"        | 215/45R17 XL | -     | 91V           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |
| 14"        | 165/60R14    | -     | 75T           | 5.0J         | 170                | 554                   | 387            | 300                     | TL    |            | 235/45R17 XL | -     | 97T           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |
|            | 185/60R14    | -     | 82T           | 5.5J         | 189                | 578                   | 475            | 300                     | TL    |            | 215/50R17 XL | -     | 95H           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |
|            | 155/65R14    | -     | 75T           | 4.5B         | 157                | 558                   | 387            | 300                     | TL    |            | 225/50R17    | -     | 94T           | 7.0J         | 233                | 658                   | 670            | 300                     | TL    |
|            | 175/65R14    | -     | 82T           | 5.0J         | 177                | 584                   | 475            | 300                     | TL    |            | 235/50R17 XL | -     | 100H          | 7.5J         | 245                | 668                   | 800            | 350                     | TL    |
|            | 185/65R14    | -     | 86T           | 5.5J         | 189                | 596                   | 530            | 300                     | TL    | 18"        | 215/55R17    | -     | 94T           | 7.0J         | 226                | 668                   | 670            | 300                     | TL    |
|            | 165/70R14    | -     | 81T           | 5.0J         | 170                | 588                   | 462            | 300                     | TL    |            | 225/55R17 XL | -     | 101H          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    |
|            | 175/70R14    | -     | 84T           | 5.0J         | 177                | 602                   | 500            | 300                     | TL    |            | 235/55R17    | -     | 99T           | 7.5J         | 245                | 690                   | 775            | 300                     | TL    |
|            | 185/70R14    | -     | 88T           | 5.5J         | 189                | 616                   | 560            | 300                     | TL    |            | 225/60R17    | -     | 99T           | 6.5J         | 228                | 702                   | 775            | 300                     | TL    |
| 15"        | 195/70R14    | -     | 91T           | 6.0J         | 201                | 630                   | 615            | 300                     | TL    |            | 225/65R17    | -     | 102T          | 6.5J         | 228                | 724                   | 850            | 300                     | TL    |
|            | 195/50R15    | -     | 82T           | 6.0J         | 201                | 577                   | 475            | 300                     | TL    | 18"        | 235/65R17    | -     | 104T          | 7.0J         | 240                | 738                   | 900            | 300                     | TL    |
|            | 185/55R15    | -     | 82T           | 6.0J         | 194                | 585                   | 475            | 300                     | TL    |            | 235/40R18 XL | -     | 95V           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |
|            | 195/55R15    | -     | 85H           | 6.0J         | 201                | 595                   | 515            | 300                     | TL    |            | 225/45R18 XL | -     | 95H           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
|            | 185/60R15    | -     | 84T           | 5.5J         | 189                | 603                   | 500            | 300                     | TL    |            | 235/45R18 XL | -     | 98T           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
|            | 195/60R15    | -     | 88T           | 6.0J         | 201                | 615                   | 560            | 300                     | TL    |            | 245/45R18 XL | -     | 100T          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
|            | 185/65R15    | -     | 88T           | 5.5J         | 189                | 621                   | 560            | 300                     | TL    | 19"        | 235/50R18 XL | -     | 101T          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
|            | 195/65R15    | -     | 91T           | 6.0J         | 201                | 635                   | 615            | 300                     | TL    |            | 245/50R18 XL | -     | 104T          | 7.5J         | 253                | 703                   | 900            | 350                     | TL    |
|            | 205/65R15    | -     | 94T           | 6.0J         | 209                | 647                   | 670            | 300                     | TL    |            | 215/55R18 XL | -     | 99H           | 7.0J         | 226                | 693                   | 775            | 350                     | TL    |
|            | 205/70R15    | -     | 96T           | 6.0J         | 209                | 669                   | 710            | 300                     | TL    |            | 225/55R18    | -     | 98H           | 7.0J         | 233                | 705                   | 750            | 300                     | TL    |
| 16"        | 215/70R15    | -     | 98T           | 6.5J         | 221                | 683                   | 750            | 300                     | TL    |            | 235/55R18 XL | -     | 104T          | 7.5J         | 245                | 715                   | 900            | 350                     | TL    |
|            | 195/55R16 XL | -     | 91V           | 6.0J         | 201                | 620                   | 615            | 350                     | TL    | 18"        | 245/60R18    | -     | 105H          | 7.0J         | 248                | 751                   | 925            | 300                     | TL    |
|            | 205/55R16    | -     | 91H           | 6.5J         | 214                | 632                   | 615            | 300                     | TL    |            | 235/50R19    | -     | 99H           | 7.5J         | 245                | 719                   | 775            | 300                     | TL    |
|            | 215/55R16    | -     | 93T           | 7.0J         | 226                | 642                   | 650            | 300                     | TL    |            | 235/55R19 XL | -     | 105H          | 7.5J         | 245                | 741                   | 925            | 350                     | TL    |
|            | 225/55R16    | -     | 95T           | 7.0J         | 233                | 654                   | 690            | 300                     | TL    | 19"        | 255/55R19 XL | -     | 111H          | 8.0J         | 265                | 763                   | 1090           | 350                     | TL    |
|            | 195/60R16    | -     | 89T           | 6.0J         | 201                | 640                   | 580            | 300                     | TL    |            | 275/30R20 XL | -     | 97H           | 9.5J         | 278                | 674                   | 730            | 350                     | TL    |
|            | 205/60R16    | -     | 92T           | 6.0J         | 209                | 652                   | 630            | 300                     | TL    |            | 275/45R20 XL | -     | 110H          | 9.0J         | 273                | 756                   | 1060           | 350                     | TL    |
|            | 215/60R16    | -     | 95T           | 6.5J         | 221                | 664                   | 690            | 300                     | TL    |            | 255/50R20 XL | -     | 109H          | 8.0J         | 265                | 764                   | 1030           | 350                     | TL    |
|            | 225/60R16    | -     | 98T           | 6.5J         | 228                | 676                   | 750            | 300                     | TL    | 20"        |              |       |               |              |                    |                       |                |                         |       |
|            |              |       |               |              |                    |                       |                |                         |       |            |              |       |               |              |                    |                       |                |                         |       |
|            |              |       |               |              |                    |                       |                |                         |       |            |              |       |               |              |                    |                       |                |                         |       |
|            |              |       |               |              |                    |                       |                |                         |       |            |              |       |               |              |                    |                       |                |                         |       |

● Made in China






SW612



Benefits and Features

- All-round winter performance for vans and other commercial vehicles
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

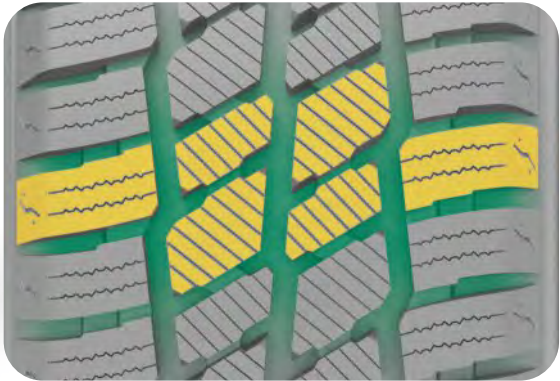

M+S



|              |         |
|--------------|---------|
| Rim Size     | 12 - 16 |
| Series       | 60 - 75 |
| Speed Rating | N - T   |

SW612

| Rim (inch) | Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 12"        | 155R12C    | D/8PR  | 88/86Q        | 4.5B         | 157                | 550                   | 560/530        | 450                     | TL    |
| 13"        | 155R13C    | C/6PR  | 85/83Q        | 4.5J         | 157                | 578                   | 515/487        | 350                     | TL    |
|            | 165R13C    | C/6PR  | 91/89Q        | 4.5B         | 165                | 594                   | 615/580        | 450                     | TL    |
|            | 175R13C    | D/8PR  | 97/95Q        | 5.0B         | 177                | 610                   | 730/690        | 450                     | TL    |
| 14"        | 185R14C    | D/8PR  | 102/100R      | 5.5J         | 188                | 650                   | 850/800        | 450                     | TL    |
|            | 175/70R14C | C/6PR  | 95/93Q        | 5.0J         | 177                | 602                   | 690/650        | 375                     | TL    |
| 15"        | 195R15C    | D/8PR  | 106/104R      | 5.5J         | 196                | 693                   | 950/900        | 450                     | TL    |
|            | 205/65R15C | C/6PR  | 102/100T      | 6.0J         | 209                | 647                   | 850/800        | 375                     | TL    |
|            | 195/70R15C | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    |
|            | 205/70R15C | D/8PR  | 106/104R      | 6.0J         | 209                | 669                   | 950/900        | 450                     | TL    |
|            | 215/70R15C | D/8PR  | 109/107R      | 6.5J         | 221                | 683                   | 1030/975       | 450                     | TL    |
|            | 225/70R15C | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL    |
| 16"        | 6.50R16    | E/10PR | 108/107N      | 5.5F         | 185                | 750                   | 1000/975       | 560                     | TL    |

| Rim (inch) | Size       | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 16"        | 7.00R16    | F/12PR | 117/116N      | 5.5F         | 200                | 775                   | 1258/1250      | 670                     | TL    |
|            | 195/60R16C | C/6PR  | 99/97T        | 6.0J         | 201                | 640                   | 775/730        | 375                     | TL    |
|            | 195/65R16C | D/8PR  | 104/102T      | 6.0J         | 201                | 660                   | 900/850        | 475                     | TL    |
|            | 205/65R16C | D/8PR  | 107/105T      | 6.0J         | 209                | 672                   | 975/925        | 475                     | TL    |
|            | 215/65R16C | D/8PR  | 109/107R      | 6.5J         | 221                | 686                   | 1030/975       | 475                     | TL    |
|            | 225/65R16C | D/8PR  | 112/110R      | 6.5J         | 228                | 698                   | 1120/1060      | 475                     | TL    |
|            | 235/65R16C | D/8PR  | 115/113R      | 7.0J         | 240                | 712                   | 1215/1150      | 475                     | TL    |
|            | 185/75R16C | D/8PR  | 104/102Q      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |
|            | 195/75R16C | D/8PR  | 107/105R      | 5.5J         | 196                | 698                   | 975/925        | 475                     | TL    |
|            | 205/75R16C | D/8PR  | 110/108Q      | 5.5J         | 203                | 714                   | 1060/1000      | 475                     | TL    |
|            | 215/75R16C | D/8PR  | 113/111Q      | 6.0J         | 216                | 728                   | 1150/1090      | 475                     | TL    |
|            | 225/75R16C | E/10PR | 118/116Q      | 6.0J         | 223                | 744                   | 1320/1250      | 525                     | TL    |

● Made in China






IceMaster Spike Z-506



Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

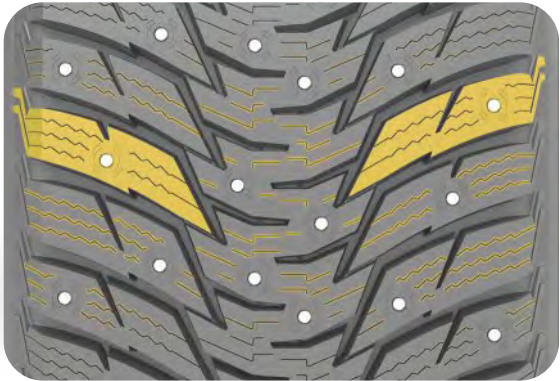

M+S



|              |         |
|--------------|---------|
| Rim Size     | 14 - 20 |
| Series       | 35 - 70 |
| Speed Rating | T - H   |

IceMaster Spike Z-506

| Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size         | LR/PR | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|--------------|-------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 14"        | 175/65R14 XL | -     | 86T           | 5.0J         | 177                | 584                   | 530            | 350                     | TL    | 17"        | 215/65R17 XL | -     | 103T          | 6.5J         | 221                | 712                   | 875            | 350                     | TL    |
|            | 185/60R14    | -     | 82T           | 5.5J         | 189                | 578                   | 475            | 320                     | TL    |            | 225/65R17    | -     | 102T          | 6.5J         | 228                | 724                   | 850            | 320                     | TL    |
|            | 185/65R14    | -     | 86T           | 5.5J         | 189                | 596                   | 530            | 320                     | TL    |            | 235/65R17    | -     | 104T          | 7.0J         | 240                | 738                   | 900            | 320                     | TL    |
|            | 195/70R14 XL | -     | 91T           | 6.0J         | 201                | 630                   | 615            | 320                     | TL    |            | 245/65R17 XL | -     | 111T          | 7.0J         | 248                | 750                   | 1090           | 350                     | TL    |
| 15"        | 195/60R15    | -     | 88T           | 6.0J         | 201                | 615                   | 560            | 320                     | TL    |            | 265/70R17    | -     | 115T          | 8.0J         | 272                | 804                   | 1250           | 320                     | TL    |
|            | 185/65R15 XL | -     | 92T           | 5.5J         | 189                | 621                   | 630            | 350                     | TL    | 18"        | 225/40R18 XL | -     | 92T           | 8.0J         | 230                | 637                   | 630            | 350                     | TL    |
|            | 195/65R15 XL | -     | 95T           | 6.0J         | 201                | 635                   | 690            | 350                     | TL    |            | 235/40R18 XL | -     | 95T           | 8.5J         | 241                | 645                   | 690            | 350                     | TL    |
|            | 205/65R15    | -     | 94T           | 6.0J         | 209                | 647                   | 670            | 320                     | TL    |            | 245/40R18 XL | -     | 97T           | 8.5J         | 248                | 653                   | 730            | 350                     | TL    |
| 16"        | 205/50R16    | -     | 87T           | 6.5J         | 214                | 612                   | 545            | 320                     | TL    |            | 225/45R18 XL | -     | 95H           | 7.5J         | 225                | 659                   | 690            | 350                     | TL    |
|            | 195/55R16    | -     | 87T           | 6.0J         | 201                | 620                   | 545            | 320                     | TL    |            | 235/45R18 XL | -     | 98T           | 8.0J         | 236                | 669                   | 750            | 350                     | TL    |
|            | 205/55R16 XL | -     | 94T           | 6.5J         | 214                | 632                   | 670            | 350                     | TL    |            | 245/45R18 XL | -     | 100T          | 8.0J         | 243                | 677                   | 800            | 350                     | TL    |
|            | 215/55R16 XL | -     | 97T           | 7.0J         | 226                | 642                   | 730            | 350                     | TL    |            | 235/50R18 XL | -     | 101T          | 7.5J         | 245                | 693                   | 825            | 350                     | TL    |
| 16"        | 225/55R16    | -     | 95T           | 7.0J         | 233                | 654                   | 690            | 320                     | TL    |            | 215/55R18 XL | -     | 99T           | 7.0J         | 226                | 693                   | 775            | 350                     | TL    |
|            | 205/60R16 XL | -     | 96T           | 6.0J         | 209                | 652                   | 710            | 350                     | TL    |            | 225/55R18 XL | -     | 102T          | 7.0J         | 233                | 705                   | 850            | 350                     | TL    |
|            | 215/60R16    | -     | 95T           | 6.5J         | 221                | 664                   | 690            | 320                     | TL    |            | 235/55R18 XL | -     | 104T          | 7.5J         | 245                | 715                   | 900            | 350                     | TL    |
|            | 205/65R16    | -     | 95T           | 6.0J         | 209                | 672                   | 690            | 320                     | TL    |            | 255/55R18 XL | -     | 109T          | 8.0J         | 265                | 737                   | 1030           | 350                     | TL    |
| 17"        | 215/65R16    | -     | 98T           | 6.5J         | 221                | 686                   | 750            | 320                     | TL    |            | 225/60R18 XL | -     | 104T          | 6.5J         | 228                | 727                   | 900            | 350                     | TL    |
|            | 215/70R16    | -     | 100T          | 6.5J         | 221                | 708                   | 800            | 320                     | TL    |            | 235/60R18 XL | -     | 107T          | 7.0J         | 240                | 739                   | 975            | 350                     | TL    |
|            | 235/70R16    | -     | 106T          | 7.0J         | 240                | 736                   | 950            | 320                     | TL    | 19"        | 255/35R19 XL | -     | 96T           | 9.0J         | 260                | 661                   | 710            | 350                     | TL    |
|            | 215/45R17 XL | -     | 91T           | 7.0J         | 213                | 626                   | 615            | 350                     | TL    |            | 275/35R19 XL | -     | 100T          | 9.5J         | 278                | 675                   | 800            | 350                     | TL    |
| 17"        | 225/45R17 XL | -     | 94H           | 7.5J         | 225                | 634                   | 670            | 350                     | TL    |            | 225/40R19 XL | -     | 93H           | 8.0J         | 230                | 663                   | 630            | 350                     | TL    |
|            | 235/45R17 XL | -     | 97T           | 8.0J         | 236                | 644                   | 730            | 350                     | TL    |            | 245/40R19 XL | -     | 98T           | 8.5J         | 248                | 679                   | 730            | 350                     | TL    |
|            | 245/45R17 XL | -     | 99T           | 8.0J         | 243                | 652                   | 775            | 350                     | TL    |            | 245/45R19 XL | -     | 102T          | 8.0J         | 243                | 703                   | 850            | 350                     | TL    |
|            | 205/50R17 XL | -     | 93T           | 6.5J         | 214                | 638                   | 650            | 350                     | TL    |            | 255/45R19 XL | -     | 104T          | 8.5J         | 255                | 713                   | 900            | 350                     | TL    |
| 17"        | 215/50R17 XL | -     | 95T           | 7.0J         | 226                | 648                   | 690            | 350                     | TL    |            | 235/50R19 XL | -     | 103T          | 7.5J         | 245                | 719                   | 875            | 350                     | TL    |
|            | 225/50R17 XL | -     | 98H           | 7.0J         | 233                | 658                   | 750            | 350                     | TL    |            | 255/50R19 XL | -     | 107T          | 8.0J         | 265                | 739                   | 975            | 350                     | TL    |
|            | 215/55R17 XL | -     | 98T           | 7.0J         | 226                | 668                   | 750            | 350                     | TL    |            | 235/55R19    | -     | 105T          | 7.5J         | 245                | 741                   | 925            | 350                     | TL    |
|            | 225/55R17 XL | -     | 101T          | 7.0J         | 233                | 680                   | 825            | 350                     | TL    | 20"        | 315/35R20 XL | -     | 110T          | 11J          | 320                | 728                   | 1060           | 350                     | TL    |
| 17"        | 235/55R17    | -     | 99T           | 7.5J         | 245                | 690                   | 775            | 320                     | TL    |            | 275/40R20 XL | -     | 106T          | 9.5J         | 278                | 728                   | 950            | 350                     | TL    |
|            | 215/60R17    | -     | 96T           | 6.5J         | 221                | 690                   | 710            | 320                     | TL    |            | 275/55R20 XL | -     | 117T          | 8.5J         | 284                | 810                   | 1285           | 350                     | TL    |
|            | 225/60R17 XL | -     | 103T          | 6.5J         | 228                | 702                   | 875            | 350                     | TL    |            | 275/60R20    | -     | 115T          | 8.0J         | 279                | 838                   | 1215           | 320                     | TL    |

Made in China




SW606



Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

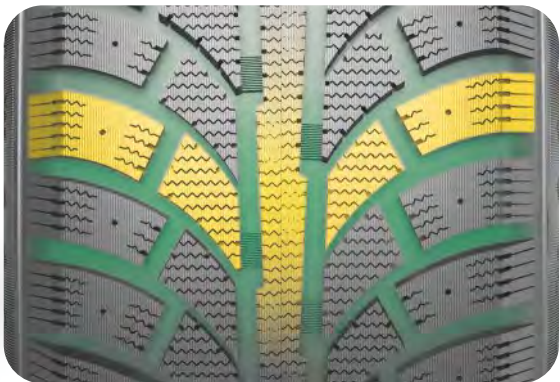

|              |         |
|--------------|---------|
| Rim Size     | 15 - 18 |
| Series       | 65 - 85 |
| Speed Rating | Q - R   |


SW606

| Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL | Rim (inch) | Size        | LR/PR  | Service Index | Standard Rim | Section Width (mm) | Overall Diameter (mm) | Max. Load (kg) | Max. Air Pressure (kpa) | TT/TL |
|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|------------|-------------|--------|---------------|--------------|--------------------|-----------------------|----------------|-------------------------|-------|
| 15"        | 195/70R15C  | D/8PR  | 104/102R      | 6.0J         | 201                | 655                   | 900/850        | 450                     | TL    | 17"        | LT245/70R17 | E/10PR | 119/116Q      | 7.0J         | 245                | 771                   | 1360/1250      | 550                     | TL    |
|            | 225/70R15C  | D/8PR  | 112/110R      | 6.5J         | 228                | 697                   | 1120/1060      | 450                     | TL    |            | LT265/70R17 | E/10PR | 121/118Q      | 8.0J         | 269                | 799                   | 1450/1320      | 550                     | TL    |
| 16"        | 185/75R16C  | D/8PR  | 104/102R      | 5.0J         | 184                | 684                   | 900/850        | 475                     | TL    |            | LT285/70R17 | E/10PR | 121/118Q      | 8.5J         | 288                | 826                   | 1450/1320      | 550                     | TL    |
|            | LT225/75R16 | E/10PR | 115/112Q      | 6.0J         | 220                | 739                   | 1215/1120      | 550                     | TL    |            | LT245/75R17 | E/10PR | 121/118Q      | 7.0J         | 245                | 795                   | 1450/1320      | 550                     | TL    |
|            | LT245/75R16 | E/10PR | 120/116Q      | 7.0J         | 245                | 771                   | 1380/1260      | 550                     | TL    |            | LT235/80R17 | E/10PR | 120/117Q      | 6.5J         | 232                | 802                   | 1400/1285      | 550                     | TL    |
|            | LT265/75R16 | E/10PR | 123/120Q      | 7.5J         | 264                | 802                   | 1550/1400      | 550                     | TL    | 18"        | LT275/65R18 | E/10PR | 123/120Q      | 8.0J         | 282                | 810                   | 1550/1400      | 550                     | TL    |
| 17"        | LT235/85R16 | E/10PR | 120/116Q      | 6.5J         | 224                | 801                   | 1380/1260      | 550                     | TL    |            | LT275/70R18 | E/10PR | 125/122Q      | 8.0J         | 270                | 837                   | 1650/1500      | 550                     | TL    |

Made in China



TYRE SIZE KNOWLEDGE

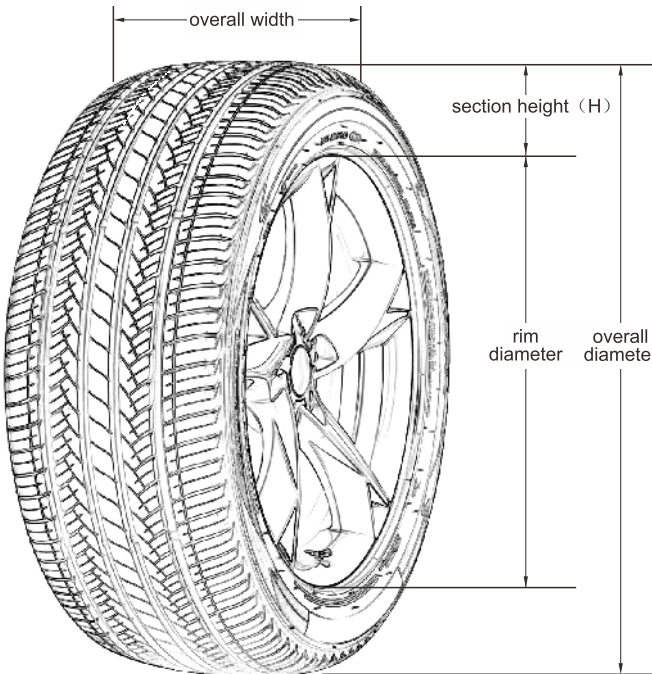

overall width

section height (H)

rim diameter

overall diameter

**225/40ZR18 92W**

Speed Symbol

Load Index

Nominal Rim Diameter in Inches

Radial Construction


Initial Z means speed capacity ≥240Kph

Nominal Aspect Ratio as a Percentage

Nominal Section Width in Millimeters

Aspect ratio (%) =  $\frac{\text{Section Height}}{\text{Section Width}} \times 100$

SIDEWALL INSTRUCTION

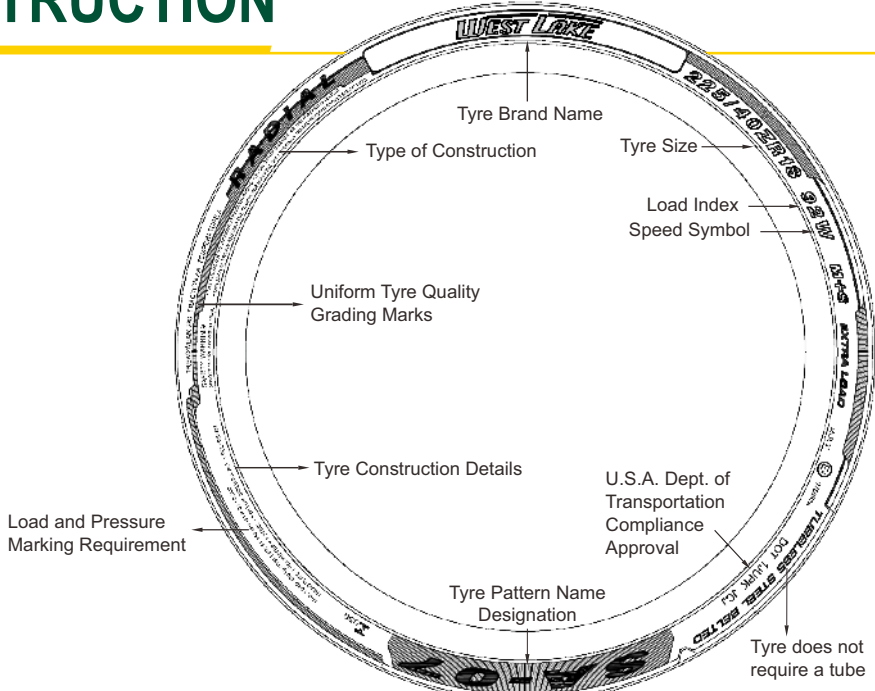

WEST LAKE

225/40ZR18 92W

TYRE BRAND NAME

TYRE SIZE

TYRE CONSTRUCTION

LOAD INDEX

SPEED SYMBOL

UNIFORM TYRE QUALITY GRADING MARKS

TYRE CONSTRUCTION DETAILS

U.S.A. DEPT. OF TRANSPORTATION COMPLIANCE APPROVAL

TYRE PATTERN NAME DESIGNATION

LOAD AND PRESSURE MARKING REQUIREMENT

TYRE DOES NOT REQUIRE A TUBE

OTHER MARKINGS

- P** ..... as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
- LT** ..... as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
- M&S** ..... letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
- XL** ..... as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
- ZR** ..... as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

TYRE UPGRADE

**"Tyre Upgrade" means:** increase of rim diameter without changing of tyre overall diameter, the trend in development of low aspect ratio is called upgrade.

INCREASE OF SPORTY PERFORMANCE

The tyre response will be more sensitive when you turn the steering wheel that the flex of tyre will be reduced, and the performance of steering and handling stability will be better, especially under medium and high speed driving.

ENHANCEMENT OF BRAKING ABILITY

The braking stability will be improved due to the decrease of tyre flex when you brake.

**Please refer to the clarifications set forth below to upgrade the tyre:**

- Without any particular reason, please do not change the overall diameter of tyre easily. The alternation of tyre overall diameter will cause misreading of speedometer or mutual interference between tyre and other parts of vehicle.
- Please determine the width of tyre in accordance with the specific width of vehicle. If the width of the entyre tyre is increased overly, it will cause mutual interference between tyre and other parts of vehicle, even heading out of the tyre from bodywork which will initiate danger.
- Notice the load index of vehicle when you upgrade the tyre. There is rule to the weight which the tyre can bear (load index) for each size. Please refer to the load index when you chose the proper size.

Under the condition of keeping general the same of tyre overall diameter, the tyre can be upgraded to:

| 14 inch | 15 inch | 16 inch | 17 inch |
|---------|---------|---------|---------|
|         |         |         |         |



## TYRE ROTATION AND INFLATION


### TYRE ROTATION

The purpose for rotating tyres is to achieve a more uniform wear for all tyres on a vehicle. Before rotating tyres, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.

Otherwise it will cause: **1.** Ride disturbing; **2.** More noise; **3.** Poor ride comfort; **4.** Shorter of life span.

**Note:** it is suggested that tyres should be transposed as soon as the phenomena above mentioned are detected (especially the two front wheels).

The tyre transposition patterns are acceptable below. Please refer to your vehicle owner's manual regarding tyre transposition advice.

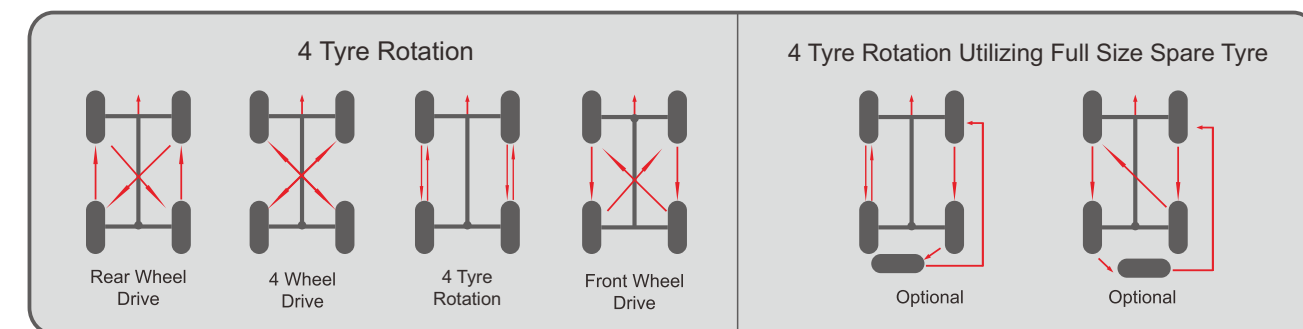

### TYRE INFLATION

**One of the most important aspects of tyre maintenance is proper inflation.**

Sufficient inflation is needed to carry the load and avoid damage. Driving with improper inflation (particularly grossly under inflated or over inflated tyres) is dangerous and can cause critical damage or sudden failure of the tyre(s). Proper inflation should be maintained and check on at least weekly bases and before long distance drives.

**Proper inflation should be maintained and checked at least once a week and before a long distance drive.**

It is also advisable to take into account axle load and driving conditions when setting inflation pressure. Compensation for heavier loads can be made by increasing inflation pressure, but do not exceed maximum inflation for the tyre or maximum axle load.

**In the space of just one month, a tyre can lose 10 pounds of air pressure.**

It is important to check your air pressure regularly, to make sure your tyres are neither under nor over inflated.

#### Under-inflation

Is the worst enemy your tyre can have. It causes increased treadwear on the outside edges (or shoulders) of the tyre. It

also generates excessive heat, which reduces tyre durability. Finally it reduces your fuel economy by increasing rolling resistance-soft tyres make your vehicle work harder.

#### Over-inflation

Is also detrimental to the tyre. Too much air pressure causes the center of the tread to bear the majority of the truck's weight, which leads to faster deterioration and uneven wear. Any kind of uneven wear will shorten the lifespan of your tyres.


## MOUNTING PROCEDURE

There is extreme danger in attempting to install a tyre of one rim diameter on a rim of a different rim diameter.

Always replace a tyre on a rim with another tyre of exactly the same diameter tyre designation and suffix letters.

For example, a 16" tyre goes with a 16" rim. Never mount a 16" size diameter tyre on a 16.5" rim. While it is possible to pass a 16" diameter tyre over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tyre bead by inflating, the tyre bead may break with explosive force and could cause serious bodily injury or death.

Rims of different diameters and tapers cannot be interchanged. The top right diagrams illustrate the difference between rims of two different tapers and diameters.

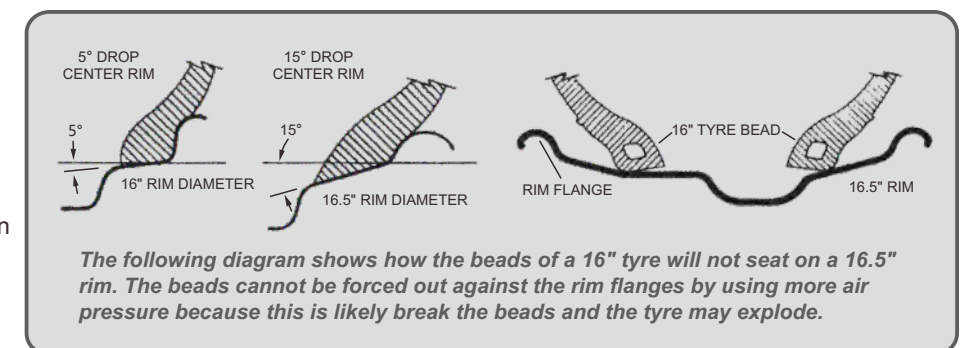

## FOR YOUR SAFETY AND COMFORT

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tyre failure may create risk of property damage or personal injury. To reduce the risk of tyre failure and for your safety and comfort, we strongly recommend the following:

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.



- Never inflate beyond 275 kPa (2.75bar, 40psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or construction on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other outer objects stuck in the tyre treads may damage the tyre. Remove outer objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, curbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, ZC rubber recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyre should not be driven over 80km/h for the first 100km.
- When driving on winter roads, sudden starts and quick stops should be avoid and a safe car-to-car driving distance should be maintained.
- When using tyre chains be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

***Never use a tyre under the following conditions and replace tyres immediately:***

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

***Storage of steel belted radial tyres:***

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with controlled environment.

To preserve traffic safety, ZC rubber recommends driving substantially slower under adverse weather or road conditions.

## ROUTINE MAINTENANCE

- Each month the tyre pressure should be checked one time at least when the tyre is cool, too much or less of the pressure will cause damage to tyre.
- Please take a 15-minutes break after driving on expressway for two hours.
- Please ensure that there are no nails, metal pieces, glass or other foreign materials.
- Please ensure that there is no damage such as separation, distortion and distinct rusting which will cause air leakage.
- Please transpose the tyres regularly (approximately 5000 km) in accordance with abrasion conditions for the sake of expanding its life span and preventing eccentric wear.
- No tyre brightener.

## THE INVENTORY OF STEEL-CORD RADIAL TYRE

The tyre should be placed in dry interior.

**Note:** In order to ensure the driving safety, we suggest that please decrease the speed while driving under atrocious weather and poor terrain condition.



# SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

| Speed Rating                  | L   | N   | P   | Q   | R   | S   | T   | U   | H   | V   | W   | Y   | ZR   |
|-------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Max. Kph.<br>(Kilometer/hour) | 120 | 140 | 150 | 160 | 170 | 180 | 190 | 200 | 210 | 240 | 270 | 300 | ≥240 |

# LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

| Load Index | KG  | LBS | Load Index | KG  | LBS  | Load Index | KG   | LBS  | Load Index | KG   | LBS  | Load Index | KG   | LBS  |
|------------|-----|-----|------------|-----|------|------------|------|------|------------|------|------|------------|------|------|
| 50         | 190 | 420 | 70         | 335 | 740  | 90         | 600  | 1320 | 110        | 1060 | 2340 | 130        | 1900 | 4180 |
| 51         | 195 | 430 | 71         | 345 | 760  | 91         | 615  | 1360 | 111        | 1090 | 2400 | 131        | 1950 | 4300 |
| 52         | 200 | 440 | 72         | 355 | 785  | 92         | 630  | 1390 | 112        | 1120 | 2470 | 132        | 2000 | 4400 |
| 53         | 206 | 455 | 73         | 365 | 805  | 93         | 650  | 1430 | 113        | 1150 | 2540 | 133        | 2060 | 4540 |
| 54         | 212 | 465 | 74         | 375 | 825  | 94         | 670  | 1480 | 114        | 1180 | 2600 | 134        | 2120 | 4680 |
| 55         | 218 | 480 | 75         | 387 | 855  | 95         | 690  | 1520 | 115        | 1215 | 2680 | 135        | 2180 | 4800 |
| 56         | 224 | 495 | 76         | 400 | 880  | 96         | 710  | 1570 | 116        | 1250 | 2760 | 136        | 2240 | 4940 |
| 57         | 230 | 505 | 77         | 412 | 910  | 97         | 730  | 1610 | 117        | 1285 | 2830 | 137        | 2300 | 5080 |
| 58         | 236 | 520 | 78         | 425 | 935  | 98         | 750  | 1650 | 118        | 1320 | 2910 | 138        | 2360 | 5200 |
| 59         | 243 | 535 | 79         | 437 | 965  | 99         | 775  | 1710 | 119        | 1360 | 3000 | 139        | 2430 | 5360 |
| 60         | 250 | 550 | 80         | 450 | 990  | 100        | 800  | 1760 | 120        | 1400 | 3080 | 140        | 2500 | 5520 |
| 61         | 257 | 565 | 81         | 462 | 1020 | 101        | 825  | 1820 | 121        | 1450 | 3200 | 141        | 2575 | 5680 |
| 62         | 265 | 585 | 82         | 475 | 1050 | 102        | 850  | 1870 | 122        | 1500 | 3300 | 142        | 2650 | 5840 |
| 63         | 272 | 600 | 83         | 487 | 1070 | 103        | 875  | 1930 | 123        | 1550 | 3420 | 143        | 2725 | 6000 |
| 64         | 280 | 615 | 84         | 500 | 1100 | 104        | 900  | 1980 | 124        | 1600 | 3520 | 144        | 2800 | 6150 |
| 65         | 290 | 640 | 85         | 515 | 1140 | 105        | 925  | 2040 | 125        | 1650 | 3640 | 145        | 2900 | 6400 |
| 66         | 300 | 660 | 86         | 530 | 1170 | 106        | 950  | 2090 | 126        | 1700 | 3740 | 146        | 3000 | 6600 |
| 67         | 307 | 675 | 87         | 545 | 1200 | 107        | 975  | 2150 | 127        | 1750 | 3860 | 147        | 3075 | 6800 |
| 68         | 315 | 695 | 88         | 560 | 1230 | 108        | 1000 | 2200 | 128        | 1800 | 3960 | 148        | 3150 | 6950 |
| 69         | 325 | 715 | 89         | 580 | 1280 | 109        | 1030 | 2270 | 129        | 1850 | 4080 | 149        | 3250 | 7150 |



***WEST LAKE***



[www.westlaketyre.com](http://www.westlaketyre.com)



[www.facebook.com/westlaketyreglobal](https://www.facebook.com/westlaketyreglobal)



**ZHONGCE RUBBER GROUP CO., LTD.**



[www.zc-rubber.com](http://www.zc-rubber.com)



[www.facebook.com/zcrubber](https://www.facebook.com/zcrubber)



[www.twitter.com/zc\\_rubber](https://www.twitter.com/zc_rubber)



[www.linkedin.com/company/zcrubber](https://www.linkedin.com/company/zcrubber)