



SPECIALTY TRAILER TIRE CATALOG





COMPANY INTRODUCTION

 **TOP 9**
No. 9 of Top 75 Global Tyre Manufacturers

 **SINCE 1958**
Established in Year 1958

 **30,000 EMPLOYEES**
Support from Over 30,000 Employees

 **200 MARKETS**
Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.


Most Advanced
Equipment


Best
Raw Material


Leanest
Management


Latest
Technology


Least
Energy Consumption


Most Suitable
Products

COMPANY MISSION

WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY

COMPANY VISION

TO BE A GLOBAL LEADING
TIRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia




BIS Certification of India



INMETRO Certification of Brazil

STRATEGIC COOPERATION

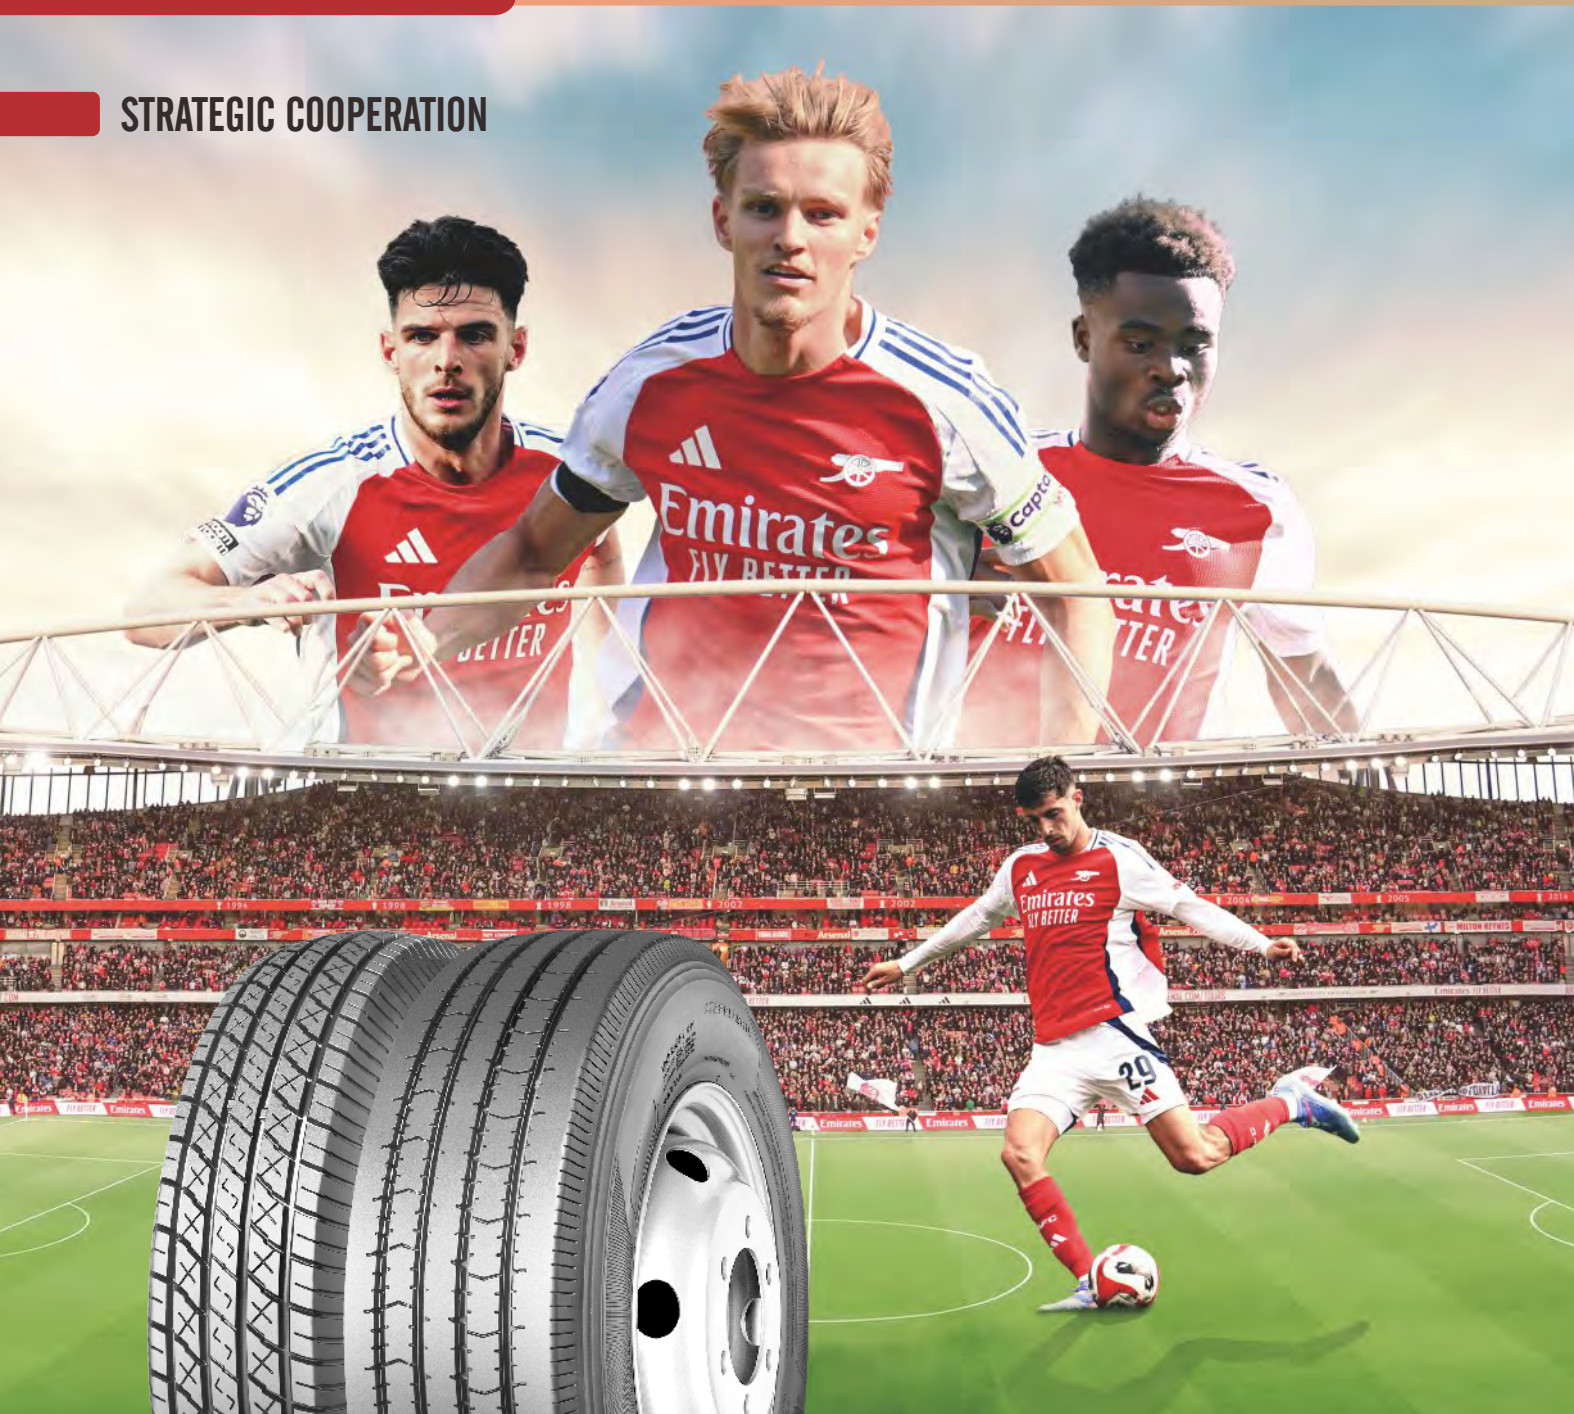

OE CUSTOMERS



KEY ACCOUNTS




KEY SUPPLIERS



OFFICIAL GLOBAL PARTNER OF ARSENAL FOOTBALL CLUB

ALWAYS MOVING FORWARD

GLOBAL BRANCHES & SUBSIDIARIES

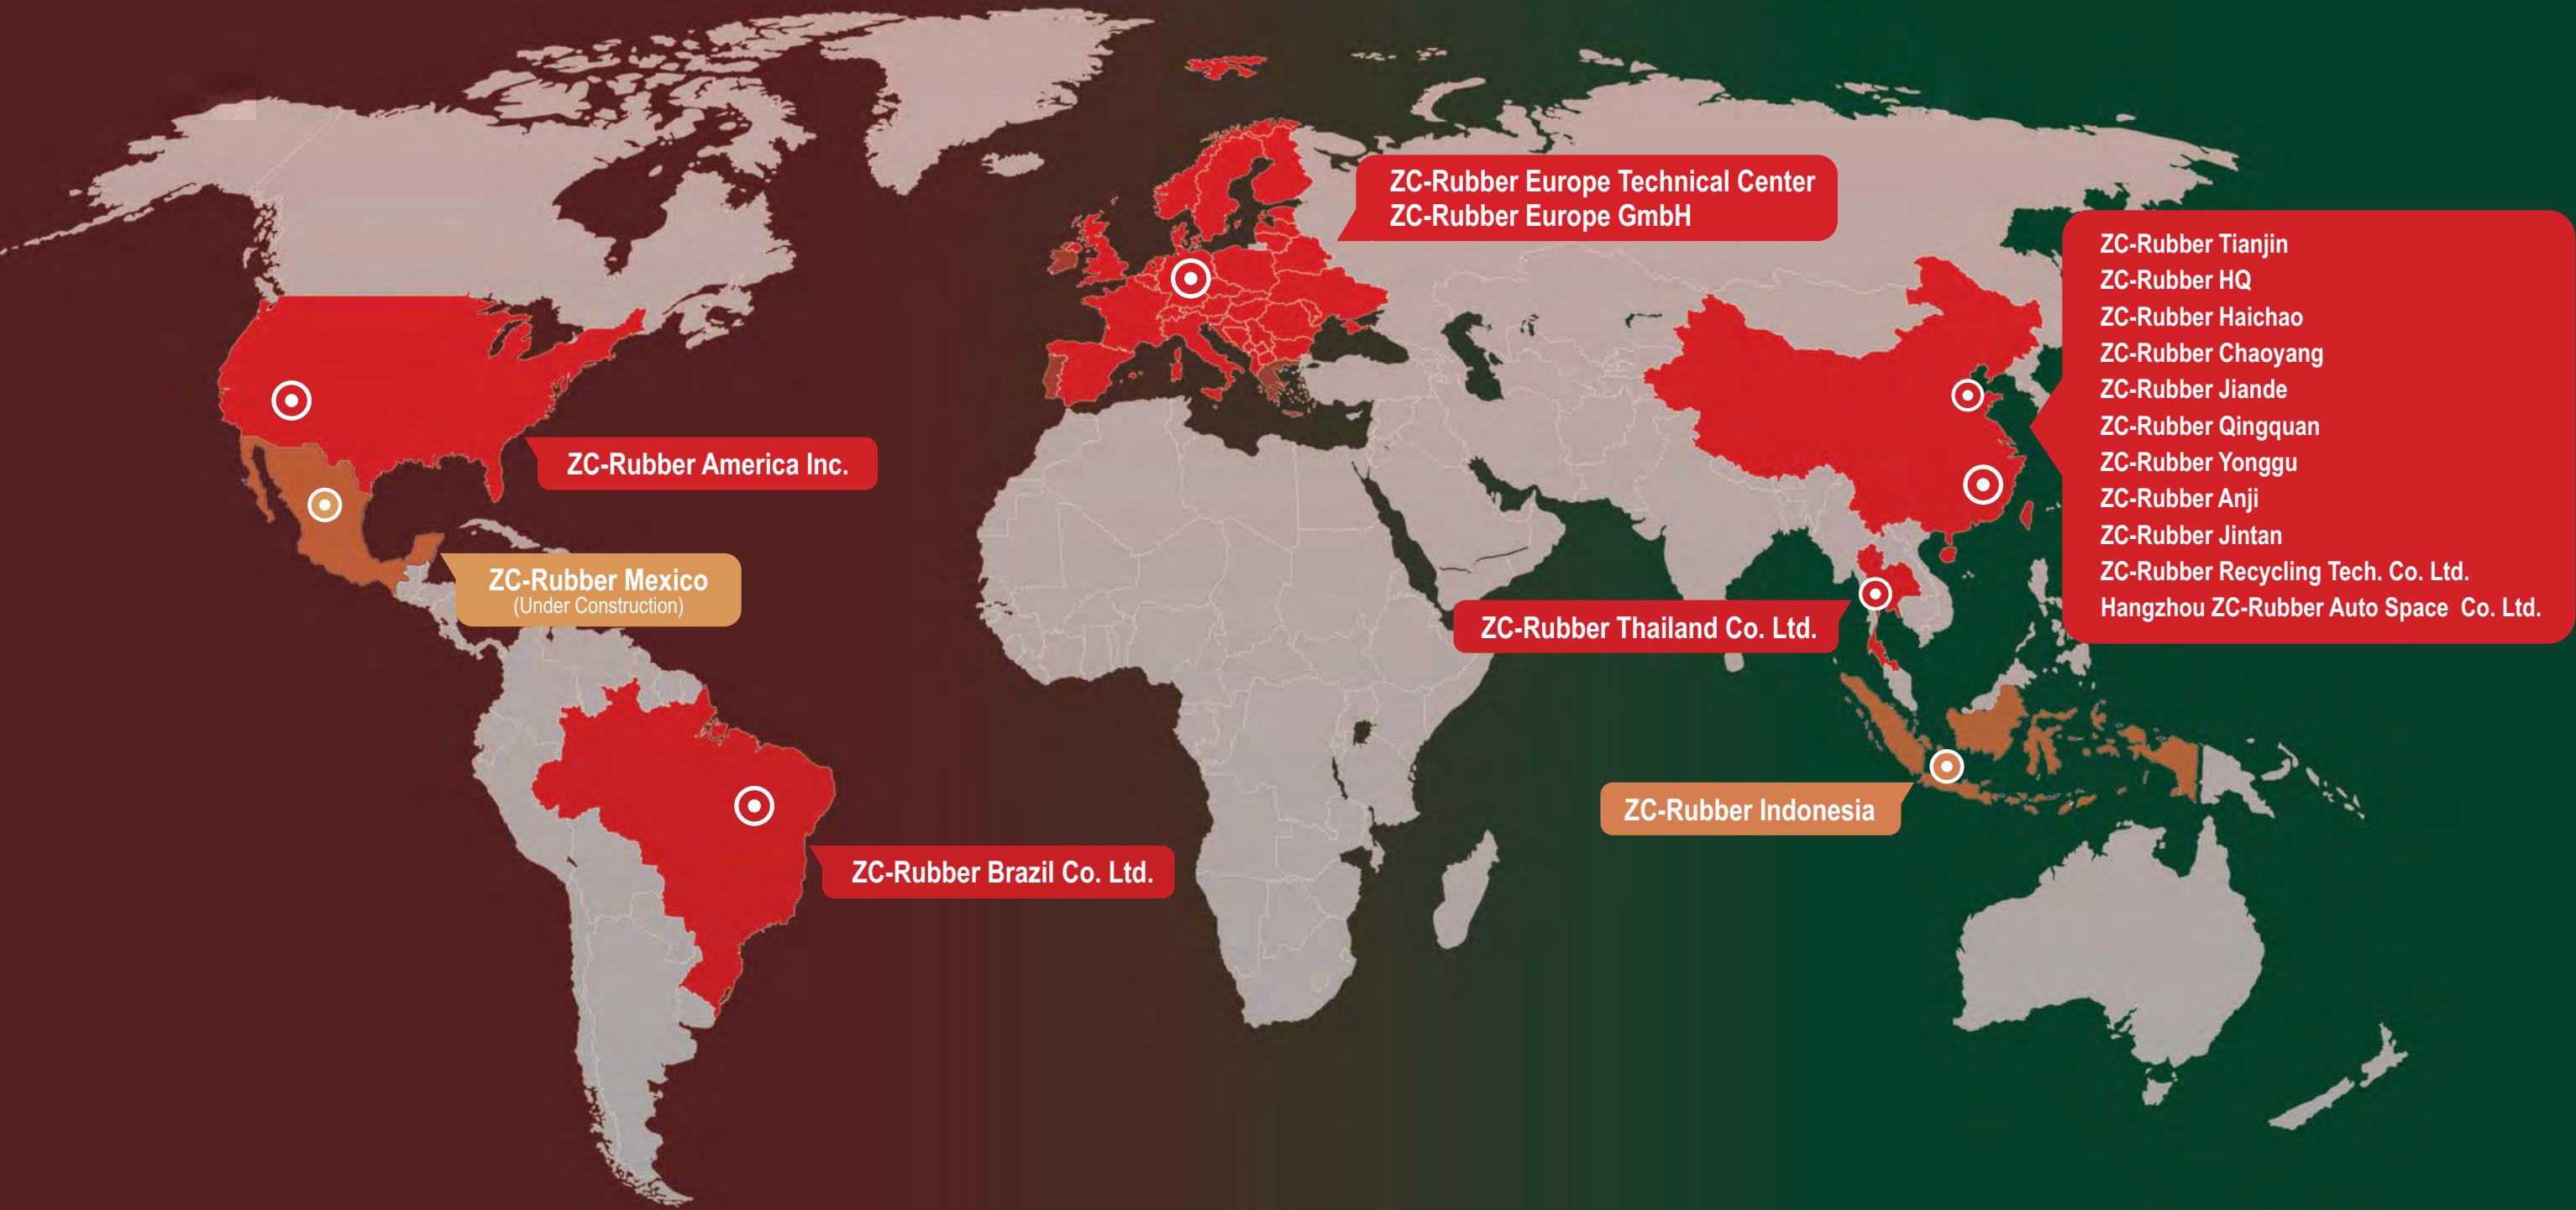

SPECIALTY TRAILER TIRE



ST600

- Traditional nylon bias specialty trailer tires applicable for trailer service
- Strong nylon casing helps to resist scraping and chipping
- Suitable for low speed service (no more than 55 mph) only

SPECIALTY TRAILER TIRE



ST227

- Steel belted tires used for specialty trailer service
- Special tire structure with steel belts and nylon casing provides enhanced durability and tire life compared to regular bias tire

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL	Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi					mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST4.8-12	C/6PR	80L	5.5	7	3.75	121	4.76	524	20.63	450	990	620	90	Tubeless	ST175/80D13	C/6PR	91/87L	6.5	8	5JB	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless
ST175/80D13	C/6PR	91/87L	5.5	7	5JB	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless	ST185/80D13	D/8PR	99/95L	6.5	8	5JB	184	7.24	626	24.65	775/690	1710/1520	450	65	Tubeless
ST205/75D14	C/6PR	100/96L	6.5	8	5 1/2 J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless	ST205/75D14	C/6PR	100/96L	6.5	8	5 1/2 J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless
ST205/75D15	C/6PR	101/97L	6.5	8	5 1/2 J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless	ST215/75D14	C/6PR	102/98L	6.5	8	6J	216	8.50	678	26.69	850/750	1870/1650	350	50	Tubeless
ST225/75D15	D/8PR	113/108L	6.5	8	6J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless	ST205/75D15	C/6PR	101/97L	6.5	8	5 1/2 J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless
ST7.00-15	D/8PR	110/105I	7.0	9	5.50F	200	7.87	750	29.53	1060/925	2235/2040	520	75	Tubeless	ST225/75D15	D/8PR	113/108L	6.5	8	6J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless
ST7.50-16	E/10PR	116/112L	8.0	10	6K	215	8.46	805	31.69	1250/1120	2750/2465	520	75	Tubeless															

SPECIALTY TRAILER TIRE



ST226

- Nylon casing radial specialty trailer tires applicable for trailer service
- Double steel belts and 2-ply nylon casing provide excellent tire durability and extra loading capacity suitable for trailers with heavy load
- Durable tire casing with less heat ensures outstanding tire performance at high speed with heavy load

SPECIALTY TRAILER TIRE



ST200



- Radial special trailer tires recommended for trailer service
- Cool-running compound and optimized profile design ensure super fuel efficiency and excellent drainage ability
- Zigzag rib and multi sipping design guarantee outstanding performance on various road condition

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST175/80R13	C/6PR	91/87L	7.0	9	5JB	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless
ST185/80R13	D/8PR	99/95L	7.0	9	5JB	184	7.24	626	24.65	775/690	1710/1520	450	65	Tubeless
ST205/75R14	C/6PR	100/96L	7.0	9	5 1/2 J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless
ST205/75R15	C/6PR	101/97L	7.0	9	5 1/2 J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless
ST205/75R15	D/8PR	107/102L	7.0	9	5 1/2 J	203	7.99	689	27.13	975/850	2150/1870	450	65	Tubeless
ST225/75R15	D/8PR	113/108L	7.5	9	6J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless
ST225/75R15	E/10PR	117/112L	7.5	9	6J	223	8.78	719	28.31	1285/1120	2830/2470	550	80	Tubeless
ST235/80R16	E/10PR	124/120L	7.5	9	6 1/2 J	235	9.25	782	30.79	1600/1400	3520/3080	550	80	Tubeless
ST225/90R16	D/8PR	121/117L	7.5	9	6J	220	8.65	808	31.81	1450/1285	3200/2830	450	65	Tubeless
ST235/85R16	F/12PR	128/124L	7.5	9	6 1/2 J	235	9.25	806	31.73	1800/1600	3960/3520	660	95	Tubeless

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST175/80R13	C/6PR	91/87M	6.3	8	5JB	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless
ST185/80R13	D/8PR	99/95M	6.3	8	5JB	184	7.24	626	24.65	775/690	1760/1570	450	65	Tubeless
ST205/75R14	C/6PR	100/96M	6.3	8	5.5J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless
ST205/75R14	D/8PR	105/101M	6.3	8	5.5J	203	7.99	664	26.14	925/825	2040/1820	450	65	Tubeless
ST205/75R15	C/6PR	101/97M	6.3	8	5.5J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless
ST205/75R15	D/8PR	107/102M	6.3	8	5.5J	203	7.99	689	27.13	975/850	2150/1870	450	65	Tubeless
ST225/75R15	D/8PR	113/108M	6.8	9	6J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless
ST225/75R15	E/10PR	117/112M	6.8	9	6J	223	8.78	719	28.31	1285/1120	2830/2470	550	80	Tubeless
ST235/80R16	E/10PR	124/120M	6.8	9	6.5J	235	9.25	782	30.79	1600/1400	3520/3080	550	80	Tubeless

SPECIALTY TRAILER TIRE



STZC HEAT-LESS

- The special HEAT-LESS (using heat resistant compounding) technologies helps to slow down the tire aging and extend the tire life
- Double steel belts for enhanced strength helping puncture resistance and vehicle towing stability
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- Full nylon cap available in all sizes for improved durability

SPECIALTY TRAILER TIRE



ST-100A HEAT-LESS

- The special HEAT-LESS (using heat resistant compounding) technologies helps to slow down the tire aging and extend the tire life
- Double steel belts for enhanced strength helping puncture resistance and vehicle towing stability
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- Full nylon cap available in all sizes for improved durability

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST175/80R13	C/6PR	91/87L	7.5	9	5.0J	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless
ST185/80R13	D/8PR	99/95L	7.5	9	5.0J	184	7.24	626	24.65	775/690	1710/1520	450	65	Tubeless
ST205/75R14	C/6PR	100/96L	7.8	10	5.5J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless
ST215/75R14	C/6PR	102/98L	7.5	9	6.0J	216	8.50	678	26.69	850/750	1870/1650	350	50	Tubeless
ST215/75R14	D/8PR	108/103L	7.8	10	6.0J	216	8.50	678	26.69	1000/875	2200/1930	450	65	Tubeless
ST205/75R15	C/6PR	101/97L	7.8	10	5.5J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless
ST205/75R15	D/8PR	107/102L	7.8	10	5.5J	203	7.99	689	27.13	975/850	2150/1870	450	65	Tubeless
ST225/75R15	C/6PR	107/102L	8.2	10	6.0J	223	8.78	719	28.31	975/850	2150/1870	350	50	Tubeless
ST225/75R15	D/8PR	113/108L	8.2	10	6.0J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless
ST225/75R15	E/10PR	117/112L	8.2	10	6.0J	223	8.78	719	28.31	1285/1120	2830/2470	550	80	Tubeless
ST235/80R16	E/10PR	124/120L	8.2	10	6.5J	235	9.25	782	30.79	1600/1400	3520/3080	550	80	Tubeless
ST235/85R16	F/12PR	128/124L	8.2	10	6.5J	235	9.25	806	31.73	1800/1600	3960/3520	660	95	Tubeless
ST225/90R16	D/8PR	121/117L	8.2	10	6.0J	220	8.66	808	31.81	1450/1285	3200/2830	450	65	Tubeless

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST175/80R13	C/6PR	91/87M	7.5	9	5.0J	177	6.97	610	24.02	615/545	1360/1200	350	50	Tubeless
ST205/75R14	C/6PR	100/96M	7.8	10	5.5J	203	7.99	664	26.14	800/710	1760/1570	350	50	Tubeless
ST205/75R14	D/8PR	105/101M	7.8	10	5.5J	203	7.99	664	26.14	925/825	2040/1820	450	65	Tubeless
ST215/75R14	C/6PR	102/98M	7.8	10	6.0J	216	8.50	678	26.69	850/750	1870/1650	350	50	Tubeless
ST215/75R14	D/8PR	108/103	7.8	10	6.0J	216	8.50	678	26.69	1000/875	2200/1930	450	65	Tubeless
ST205/75R15	C/6PR	101/97M	7.8	10	5.5J	203	7.99	689	27.13	825/730	1820/1610	350	50	Tubeless
ST205/75R15	D/8PR	107/102M	7.8	10	5.5J	203	7.99	689	27.13	975/850	2150/1870	450	65	Tubeless
ST225/75R15	C/6PR	107/102M	8.2	10	6.0J	223	8.78	719	28.31	975/850	2150/1870	350	50	Tubeless
ST225/75R15	D/8PR	113/108M	8.2	10	6.0J	223	8.78	719	28.31	1150/1000	2540/2200	450	65	Tubeless
ST225/75R15	E/10PR	117/112M	8.2	10	6.0J	223	8.78	719	28.31	1285/1120	2830/2470	550	80	Tubeless
ST235/80R16	E/10PR	124/120M	8.2	10	6.5J	235	9.25	782	30.79	1600/1400	3520/3080	550	80	Tubeless
ST235/85R16	E/10PR	125/121M	8.2	10	6.5J	235	9.25	806	31.73	1650/1450	3640/3200	550	80	Tubeless

SPECIALTY TRAILER TIRE



CR960A



- Special designed all steel radial tire applicable for specialty trailer service
- Improved close shoulder helps to improve even wear resulting in long tread life
- Strong steel casing with steel belt provide extraordinary durability and longer tire life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST235/80R16	G/14PR	129/125L	9.0	11	6½J	235	9.25	782	30.79	1850/1650	4080/3640	760	110	Tubeless
ST235/85R16	G/14PR	132/127L	10.5	13	6½J	235	9.25	806	31.73	2000/1750	4400/3860	760	110	Tubeless
215/75R17.5	J/18PR	135/133L	12.5	16	6	211	8.31	767	30.20	2180/2060	4805/4540	850	123	Tubeless
235/75R17.5	J/18PR	143/141L	13.3	17	6.75	233	9.17	797	31.38	2725/2525	6005/5675	875	128	Tubeless

SPECIALTY TRAILER TIRE



CR960T



- Special designed all steel radial tire applicable for specialty trailer service
- Improved close shoulder helps to improve even wear resulting in long tread life
- Strong steel casing with steel belt provide extraordinary durability and longer tire life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads

Size	LR/PR	Service Index	Tread Depth		Standard Rim	Section Width		Overall Diameter		Max. Load		Max. Air		TT/TL
			mm	32nds		mm	inch	mm	inch	kg	lbs	kpa	psi	
ST225/75R15	F/12PR	121/117M	10	12	6.00	223	8.78	719	28.31	1450/1290	3200/2840	655	95	Tubeless



ZHONGCE RUBBER GROUP CO., LTD.



zc-rubber.com



facebook.com/zcrubber



twitter.com/zc_rubber



linkedin.com/company/zcrubber